

Real Time Water Quality Deployment Report Come by Chance River July – August 2008

General

- The Water Resources Management Division staff monitors the real-time web page on a daily basis.
- Newfoundland and Labrador Refining Company will be informed of any significant water quality events in the form of a monthly report.
- This monthly report interprets the data from the Come by Chance River RTWQ station for the period of July 11 to August 13, 2008.

Maintenance and Calibration of Instrumentation

- The Come by Chance River instrument was deployed on July 11, 2008. A second set of data readings were collected at the time of installation, using a similar, freshly calibrated instrument. Data readings from both instruments were compared and their variability was ranked, as part of QA/QC protocol.
- The QA/QC rankings upon comparing water quality data from both instruments for the removal before the start of the deployment period and the installation at the start of the deployment period are both indicated in **Table 1.** Rankings of "good" and "excellent" were achieved on installation for all parameters.

Table 1: QA/QC Data Comparison Rankings upon removal on July 9th, 2008 and installation on July 11th, 2008

Station	Date	Action	Instrument Comparison Ranking						
Station	Date	Action	Temperature	рН	Conductivity	Dissolved Oxygen			
Come by	Jul. 9, 2008	Removal	ral Good		Excellent	Excellent			
Chance River	Jul. 11, 2008	Installation	Excellent	Good	Excellent	Excellent			


- The Come by Chance River instrument was removed August 13th after a period of 33 days for regular maintenance and calibration activities. A second set of data readings were collected at the time of removal, using a similar, freshly calibrated instrument. Data readings from both instruments were compared and their variability was ranked, as part of QA/QC protocol.
- The QA/QC rankings upon comparing water quality data from both instruments for the removal at the end of the deployment period and the removal after the deployment period are both indicated in **Table 2.** Rankings of "excellent" were achieved for all parameters on installation except pH. pH had a "marginal" ranking indicating fouling or loss of calibration for the sensor over the deployment period. The "excellent" rankings on removal indicate a high degree of accuracy in the data obtained for all other parameters.

Table 2: QA/QC Data Comparison Rankings upon removal on August 13th, 2008 and installation on August 18th, 2008


Station	Date	Action	Instrument Comparison Ranking						
Station	Date	Action	Temperature	рН	Conductivity	Dissolved Oxygen			
Come by	Aug. 13, 2008	Removal	Excellent	Marginal	Excellent	Excellent			
Chance River	Aug. 18, 2008	Installation	Excellent	Excellent	Excellent	Excellent			

Data Interpretation

Water temperature values (Figure 1) for the deployment period displayed diurnal fluctuations and remained consistent, typical for the summer season. Water temperature ranged between 15.6 and 24.75°C.

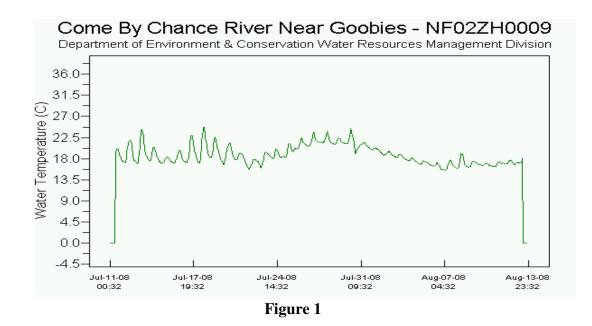

Dissolved oxygen (DO) values (Figure 2) for the deployment period remained consistent. DO values ranged from 7.78 to 9.52 mg/L, most below the most conservative recommended DO concentration of 9.5 mg/L by the Canadian Council of Ministers of the Environment (CCME) Protection of Freshwater Aquatic Life Guidelines (cold water/other life stages – above 6.5; warm water/other life stages – above 5.5; warm water/early life stages – above 6; cold water/early life stages – above 9.5 mg/L).

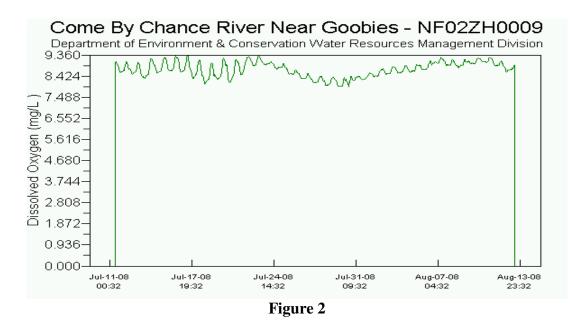

PH values (Figure 3) displayed a general decrease over the deployment period, consistent with the "marginal" ranking on removal, possibly a result of sensor fouling or loss of calibration. pH values ranged between 6.04 and 6.93, all values below the minimum pH level of 6.5 recommended by the CCME Guidelines for the Protection of Freshwater Aquatic Life (due to the naturally acidic nature of NL waters).


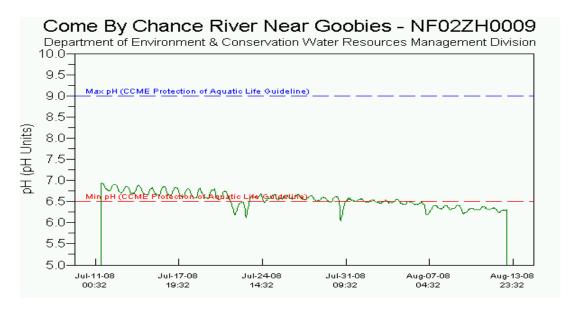


Figure 3

Specific conductance values (Figure 4) were generally consistent over the deployment period with the exception of several downward spikes in data. The downward spikes correspond to precipitation events and increases in stage. Specific conductance ranged from 68.1 to 98.5µS/cm.

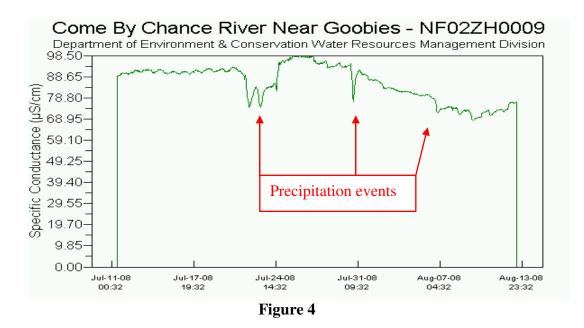

Turbidity values (Figure 5) were at zero NTU for most of the deployment period. However, spikes in turbidity values are evident, most spikes correspond to precipitation events (Appendix A), while the few others may be the result of sensor interference. The maximum turbidity value recorded for the deployment period was 36.7 NTU.

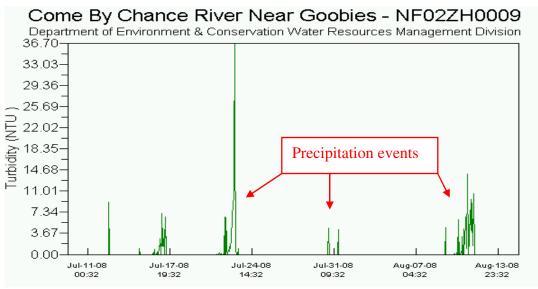


Figure 5

• Stage values (Figure 6) were generally consistent and correspond to precipitation events (Appendix A). Stage values ranged between 0.657 and 1.066 meters.

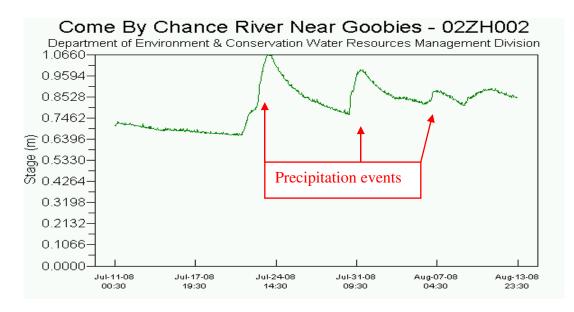


Figure 6

Prepared by: Michael Colbert

Engineer Department of Environment and Conservation Phone: (709) 729-1681 Fax: (709) 729-0320 E-mail: michaelcolbert@gov.nl.ca

	Daily Data Report for July 2008										
D a y	<u>Max</u> <u>Temp</u> ℃ ₩	<u>Min</u> <u>Temp</u> ℃ ₩	<u>Mean</u> <u>Temp</u> ℃ ☑	Heat Deg Days °C M	Cool Deg Days °C M	<u>Total</u> <u>Rain</u> mm	<u>Total</u> <u>Snow</u> cm	<u>Total</u> <u>Precip</u> mm ₩	<u>Snow on</u> <u>Grnd</u> cm	<u>Dir of Max</u> <u>Gust</u> 10's Deg	Spd of Max Gust km/h
<u>11</u> †	16.7	11.6	14.2	3.8	0.0	М	М	1.4		21	50
<u>12</u> †	20.1	11.1	15.6	2.4	0.0	М	М	4.1		34	35
<u>13</u> †	16.2	10.6	13.4	4.6	0.0	М	м	0.0		23	37
<u>14</u> †	18.0	10.7	14.4	3.6	0.0	М	М	0.0		18	50
<u>15</u> †	18.3	14.4	16.4	1.6	0.0	М	М	0.7		18	52
<u>16</u> †	18.4	13.9	16.2	1.8	0.0	М	М	0.6			<31
<u>17</u> †	15.7	12.7	14.2	3.8	0.0	М	М	0.0			<31
<u>18</u> †	16.9	12.5	14.7	3.3	0.0	М	М	0.0			<31
<u>19</u> †	15.8	11.9	13.9	4.1	0.0	М	М	11.6			<31
<u>20</u> †	15.2	11.8	13.5	4.5	0.0	М	М	0.6			<31
<u>21</u> †	16.1	11.9	14.0	4.0	0.0	М	М	28.5		11	59
<u>22</u> †	16.2	13.7	15.0	3.0	0.0	М	М	4.0			<31
<u>23</u> †	19.4	9.8	14.6	3.4	0.0	М	М	7.5		9	44
<u>24</u> †	16.8	9.3	13.1	4.9	0.0	М	М	М			<31
<u>25</u> †	17.7	14.0	15.9	2.1	0.0	М	м	0.0			<31
<u>26</u> †	18.5	15.8	17.2	0.8	0.0	М	М	16.0		20	48
<u>27</u> †	17.8	15.9	16.9	1.1	0.0	М	М	15.5		20	43
<u>28</u> †	19.1	16.0	17.6	0.4	0.0	М	М	1.2		20	32
<u>29</u> †	19.1	16.4	17.8	0.2	0.0	М	м	0.0		20	35
<u>30</u> †	20.2	16.1	18.2	0.0	0.2	М	М	5.0			<31
<u>31</u> †	19.3	13.5	16.4	1.6	0.0	М	М	0.6		35	33

Appendix A – Climate Data for Argentia, NL (July 11 to August 13, 2008)

	Daily Data Report for August 2008										
D a y	<u>Max</u> <u>Temp</u> ℃ ₩	<u>Min</u> <u>Temp</u> ℃ ₩	<u>Mean</u> <u>Temp</u> ℃ ₩	Heat Deg Days °C	<u>Cool Deg</u> <u>Days</u> ℃	<u>Total</u> <u>Rain</u> mm	<u>Total</u> <u>Snow</u> cm	<u>Total</u> <u>Precip</u> mm	<u>Snow on</u> <u>Grnd</u> cm	<u>Dir of Max</u> <u>Gust</u> 10's Deg	Spd of Max Gust km/h
<u>01</u> †	18.4	13.4	15.9	2.1	0.0	М	м	0.0		5	32
<u>02</u> †	18.6	12.9	15.8	2.2	0.0	М	М	0.0		4	33
<u>03</u> †	15.8	12.2	14.0	4.0	0.0	М	м	0.0			<31
<u>04</u> †	14.7	11.7	13.2	4.8	0.0	М	м	9.3			<31
<u>05</u> †	16.1	12.7	14.4	3.6	0.0	М	м	9.7		5	35
<u>06</u> †	14.9	11.7	13.3	4.7	0.0	М	м	13.9		4	33
<u>07</u> †	18.9	11.7	15.3	2.7	0.0	М	м	0.0		6	32
<u>08</u> †	17.0	12.6	14.8	3.2	0.0	М	м	0.0			<31
<u>09</u> †	16.7	13.2	15.0	3.0	0.0	М	м	5.9			<31
<u>10</u> †	17.1	14.4	15.8	2.2	0.0	М	м	0.0			<31
<u>11</u> †	20.4	15.4	17.9	0.1	0.0	М	м	0.0			<31
<u>12</u> †	23.1	15.1	19.1	0.0	1.1	М	м	1.6		21	39
<u>13</u> †	23.2	15.6	19.4	0.0	1.4	М	М	0.9		21	41