

## Real Time Water Quality Report

# Labrador Iron Mines Schefferville Network

Deployment Period  
2013-07-02 to 2013-08-05



Government of Newfoundland & Labrador  
Department of Environment and Conservation  
Water Resources Management Division  
St. John's, NL, A1B 4J6 Canada

Prepared by:

Ian Bell

Environmental Scientist

Department of Environment & Conservation

Water Resources Management Division

PO Box 2006, Corner Brook, NL, A2H 6J8

t. 709.637.2431

f. 709.637.2541

e. [ianbell@gov.nl.ca](mailto:ianbell@gov.nl.ca)

## General

- The Water Resources Management Division, in partnership with Labrador Iron Mines Ltd. and Environment Canada, maintain two real-time water quality and water quantity stations in close proximity to the James Property deposits, near Schefferville, QC.
- The official name of each station is *James Creek Above Bridge* and *Unnamed Tributary Below Settling Pond*, hereafter referred to as the James Creek station and the Unnamed Tributary station, respectively.
- Unnamed Tributary station monitors water outflow from a series of multi-cell retention and settling ponds.
- James Creek station monitors water outflow from the multi-cell retention and settling pond system mentioned above, as well as monitors outflow from Ruth Pit.
- The retention and settling pond system is comprised of four smaller man-made ponds that receive water primarily from groundwater wells constructed along the periphery of the James Property, in addition to storm water from the beneficiation area, flush water from the reject rock pipeline, and in case of pump failure, reject rock inside the pipeline that was destined to Ruth Pit. Outflow from the retention and settling pond system is directed into the Unnamed Tributary and James Creek. Priority is given to the outflow leading into the Unnamed Tributary, with surplus water directed into James Creek.
- Ruth Pit is used as a settling pond for reject rock originating from the beneficiation area at the Silver Yard, as well as receives water from pit dewatering pumps. The outflow from Ruth Pit is the start of James Creek.
- The Water Resources Management Division will inform Labrador Iron Mines Ltd. of any significant water quality events by email notification and by monthly deployment reports.
- This monthly deployment report, presents water quality and water quantity data recorded at the James Creek and Unnamed Tributary stations from July 2, 2013 to August 5, 2013.

## Quality Assurance / Quality Control

- Water quality instrument performance is tested at the beginning and end of its deployment period. The process is outlined in Appendix A.
- Instruments are assigned a performance rating (i.e., poor, marginal, fair, good or excellent) for each water quality parameter measured.
- Table 1 shows the performance ratings of five water quality parameters (i.e., temperature, pH, specific conductivity, dissolved oxygen and turbidity) measured by instruments deployed at the water monitoring stations.

Table 1. Water quality instrument performance at the beginning and end of the deployment

	<b>James Creek</b>			<b>Unnamed Tributary</b>	
Stage of deployment	Beginning	End		Beginning	End
Date	2013-07-02	2013-08-05		2013-07-02	2013-08-05
Temperature	Excellent	Excellent		Excellent	Excellent
pH	Excellent	Excellent		Excellent	Good
Specific Conductivity	Excellent	Excellent		Good	Excellent
Dissolved Oxygen	Excellent	Good		Fair	Excellent
Turbidity	Excellent	Poor		Excellent	Good

- The performances of all sensors were rated fair to excellent at the beginning of the deployment period and poor to excellent at the end (Table 1). The poor rating for Turbidity at the end of the James Creek deployment could be the result of a variety of variables such as; organic debris accumulated on the sensors after a month long deployment, short term variation in turbidity between the area where the field sonde was located and where the QA/QC reading was taken, the field turbidity sensor drifting significantly off calibration, or some other undetermined variable.

## Deployment Notes

- Water quality monitoring for this deployment period started at James Creek on July 2, 2013 at 3:30 pm and at Unnamed Tributary on the same date at 6:15 am. Continuous real-time monitoring continued at both sites without any significant operational issues until August 5, 2013 when the instruments were removed for routine calibration and maintenance.

## Data Interpretation

- Data records were interpreted for each station during the deployment period for the following six parameters:
  - (i.) Stage (m)
  - (ii.) Temperature (°C)
  - (iii.) pH
  - (iv.) Specific conductivity (µS/cm)
  - (v.) Dissolved oxygen (mg/l)
  - (vi.) Turbidity (NTU)

## Stage

- Stage values ranged from 515.80 m to 515.88 m at James Creek and from 517.13 m to 517.24 m at Unnamed Tributary from July 2, 2013 to August 5, 2013 (Figures 1 & 2). Stage height is directly related to the volume of flow in a stream as defined by a rating curve which is unique for every site.
- Daily fluctuations were observed at both stations. These diurnal fluctuations are most likely attributed to dewatering operations from the mine site.
- For Unnamed Tributary there appears to be a gentle declining trend in stage height over the duration of the deployment while for James Creek the stage height is relatively stable for the first half of the deployment, with some variability after that and a rapid increase in the last few days of the deployment (see inside red oval in Figure 1) which is related to several days of significant rainfall at that time (Climate data is located in Appendix B).
- Stage values are based on a vertical reference that is unique to each station. As a result, absolute values of stage are not comparable between stations, but relative changes in stage are.

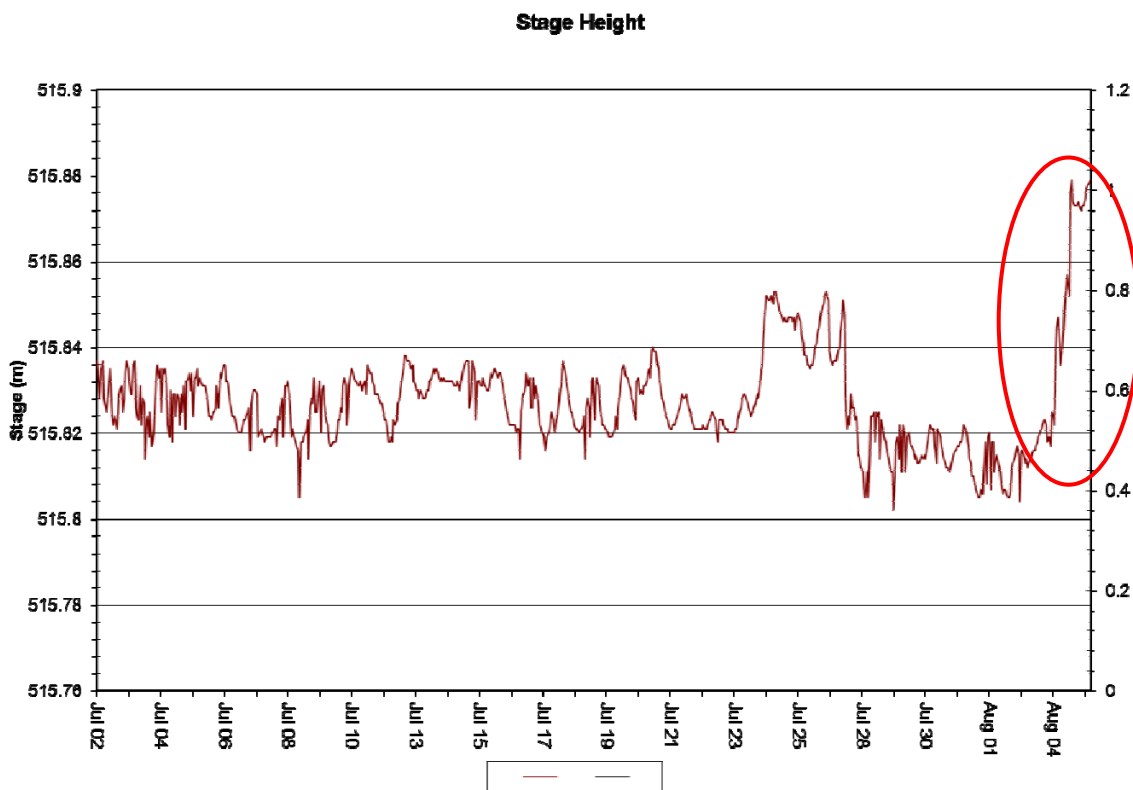


Figure 1: Stage Height (m) at James Creek from July 2, 2013 to August 5, 2013

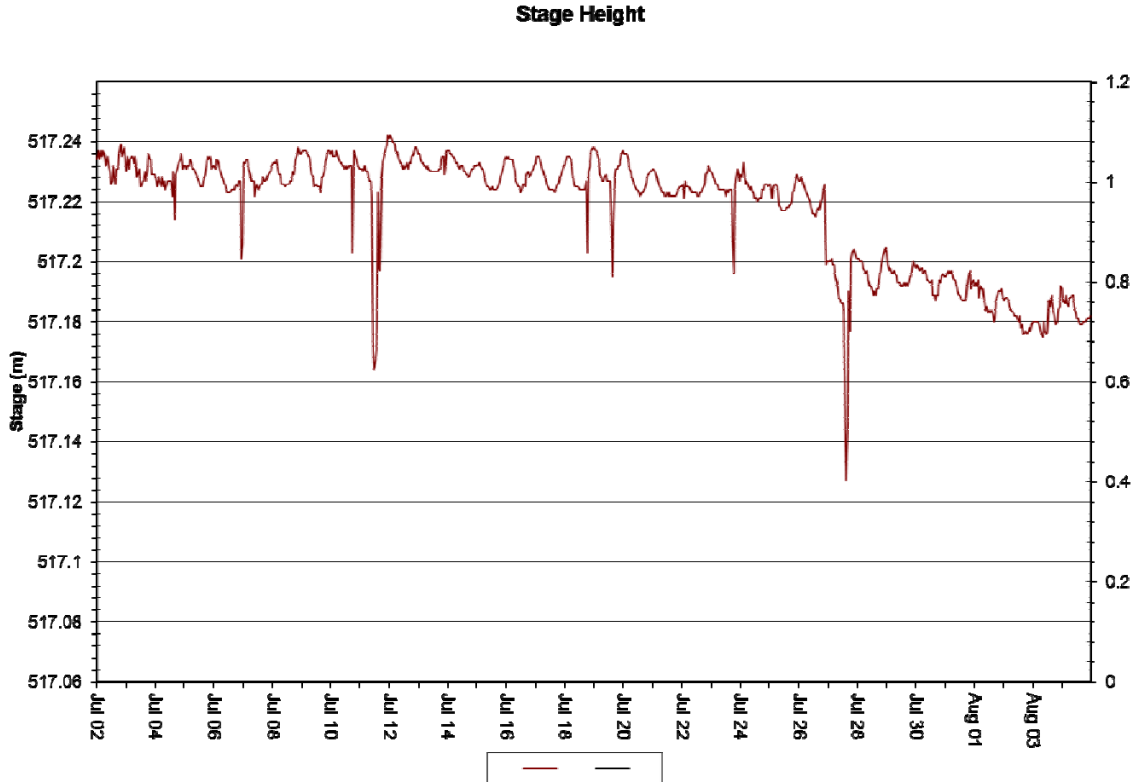


Figure 2: Stage Height (m) at Unnamed Tributary from July 2, 2013 to August 5, 2013

## Temperature

- Water temperature ranged from 7.90°C to 15.90°C at James Creek and from 2.00°C to 5.50°C at Unnamed Tributary from July 2, 2013 to August 5, 2013 (Figures 3 & 4).
- Water temperatures at both stations display large diurnal variations. This is typical of shallow water streams and ponds that are highly influenced by diurnal variations in ambient air temperatures.
- Temperatures at both stations remained relatively stable over the deployment period with no obvious increasing or decreasing trends.
- Water temperatures at the Unnamed Tributary were on average 8.36°C colder than water temperatures at James Creek. This temperature difference is largely due to a large volume of ground water which is discharged into Unnamed Tributary from deep groundwater dewatering wells which make up the majority of flow in this stream. While there is some groundwater discharged into James Creek it is not as significant a volume and its impact is attenuated by the natural surface drainage.

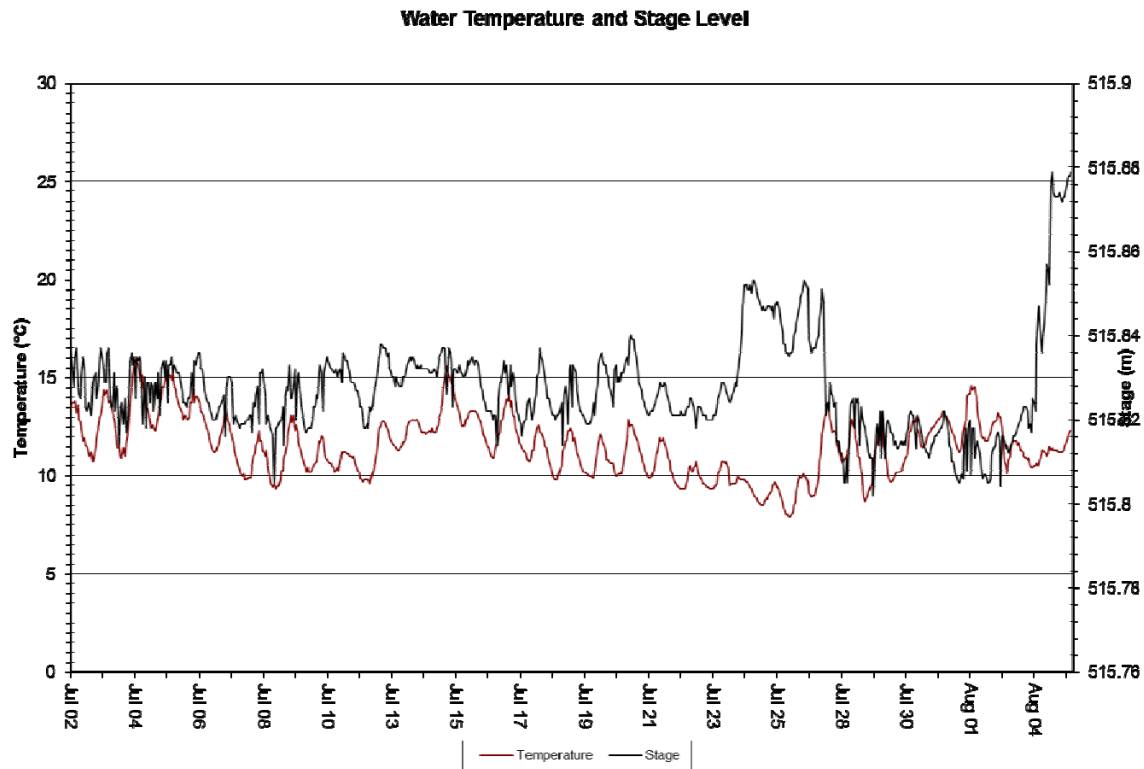


Figure 3: Temperature ( $^{\circ}\text{C}$ ) at James Creek from July 2, 2013 to August 5, 2013

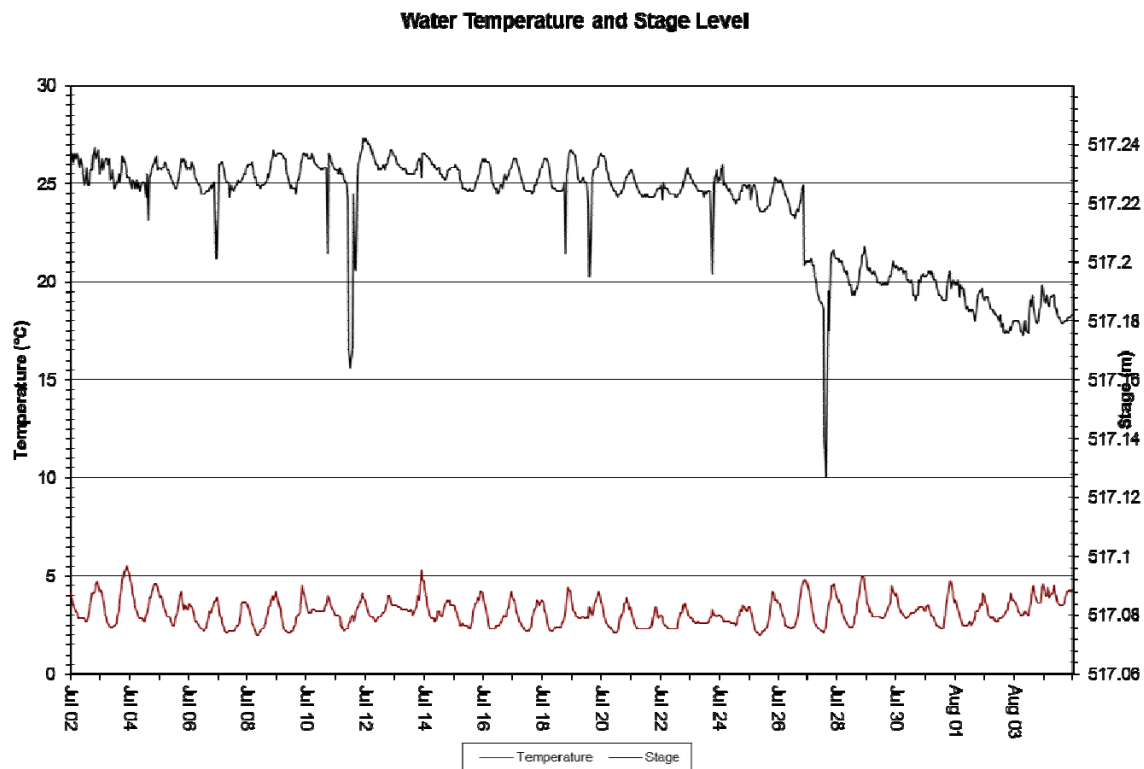


Figure 4: Temperature ( $^{\circ}\text{C}$ ) at Unnamed Tributary from July 2, 2013 to August 5, 2013



## pH

- pH values ranged from 7.31 units to 8.37 units at James Creek and from 6.72 units to 7.12 units at Unnamed Tributary from July 2, 2013 to August 5, 2013 (Figures 5 & 6).
- pH values at both stations show regular diurnal fluctuations which are related to the diurnal temperature fluctuations.
- pH was relatively stable throughout the deployment period at both James Creek and Unnamed Tributary.
- With a mean value of 7.91, pH values recorded at James Creek were within the guidelines for pH set for the protection of aquatic life (i.e., 6.5 to 9.0 units), as defined by the Canadian Council of Ministers of the Environment (2007). With a mean value of 6.90, pH values recorded at Unnamed Tributary were also within these guidelines.

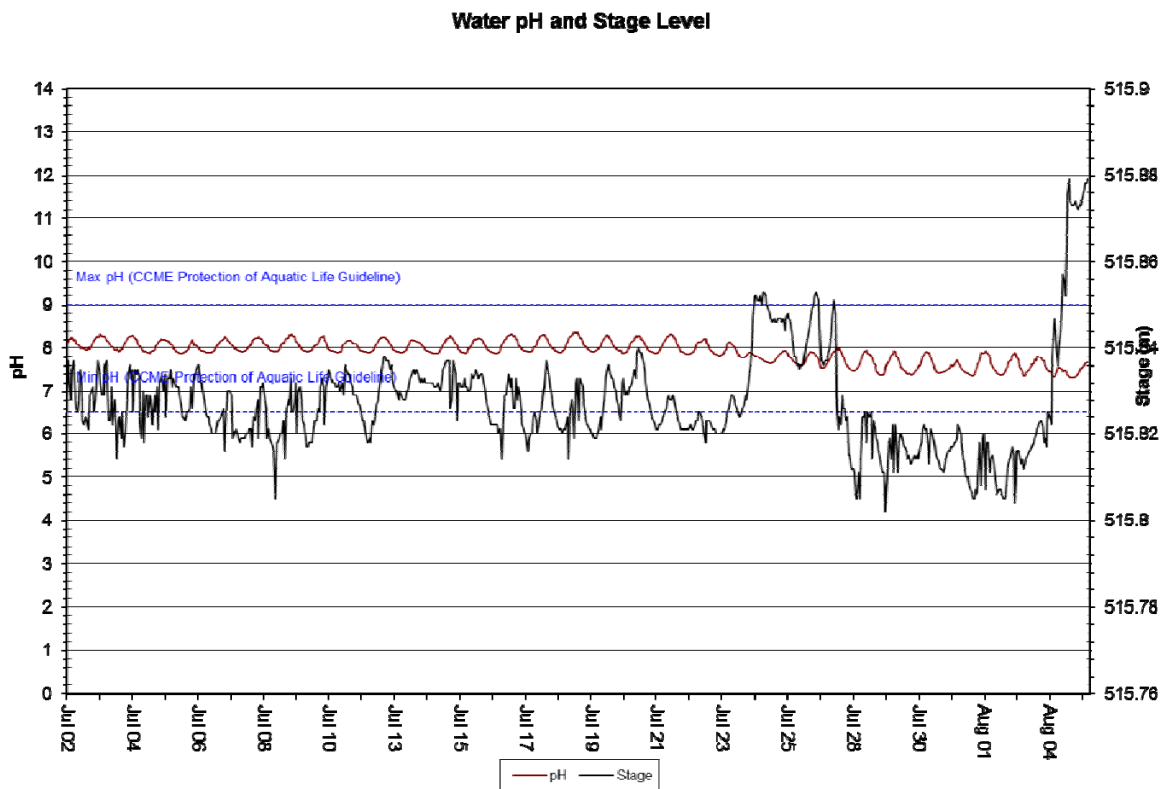


Figure 5: pH values recorded at James Creek from July 2, 2013 to August 5, 2013



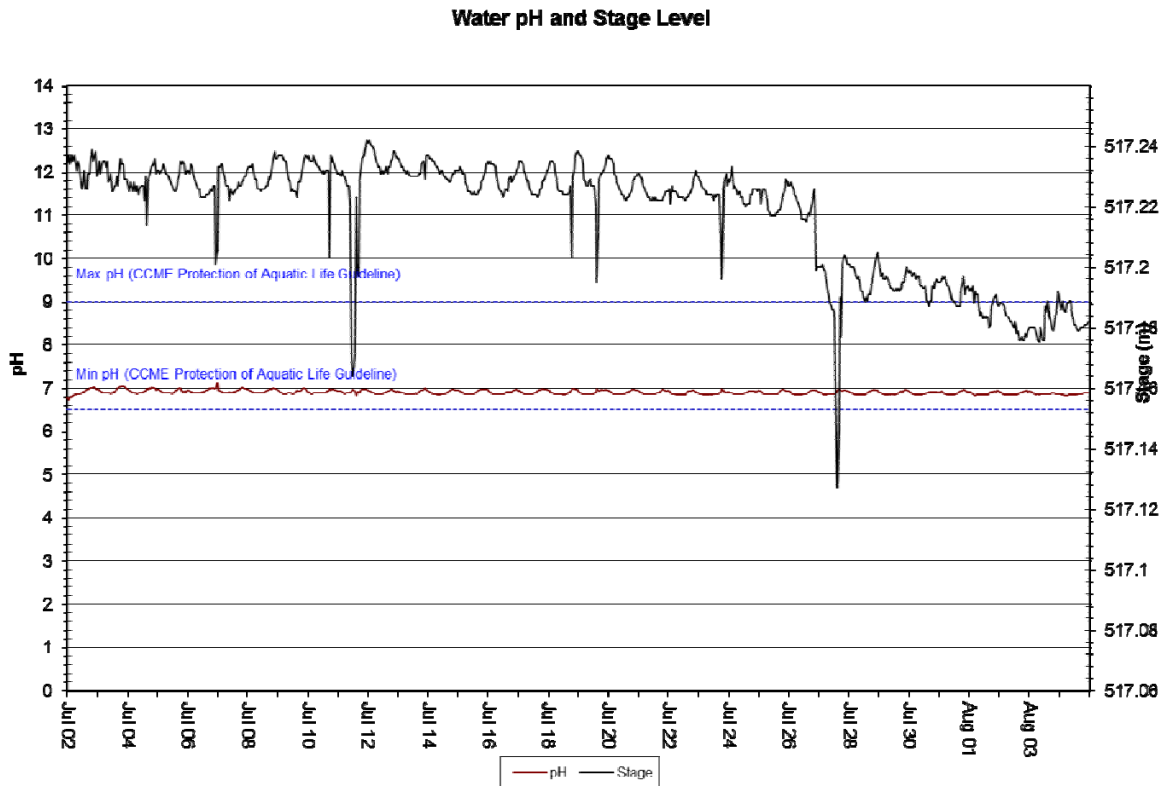


Figure 6: pH values recorded at Unnamed Tributary from July 2, 2013 to August 5, 2013

### Specific Conductivity

- Specific Conductivity ranged from 132.3  $\mu\text{S}/\text{cm}$  to 150.4  $\mu\text{S}/\text{cm}$  at James Creek and from 52.0  $\mu\text{S}/\text{cm}$  to 67.6  $\mu\text{S}/\text{cm}$  at Unnamed Tributary from July 2, 2013 to August 5, 2013 (Figures 7 & 8).
- Specific conductivity readings were fairly stable at James Creek and Unnamed Tributary during the deployment period.
- On average, specific conductivity was 140.6  $\mu\text{S}/\text{cm}$  at James Creek and 61.5  $\mu\text{S}/\text{cm}$  at Unnamed Tributary. This difference could be attributed to the increased concentration of dissolved solids from the iron ore tailings deposited into Ruth Pit, which feeds into James Creek.

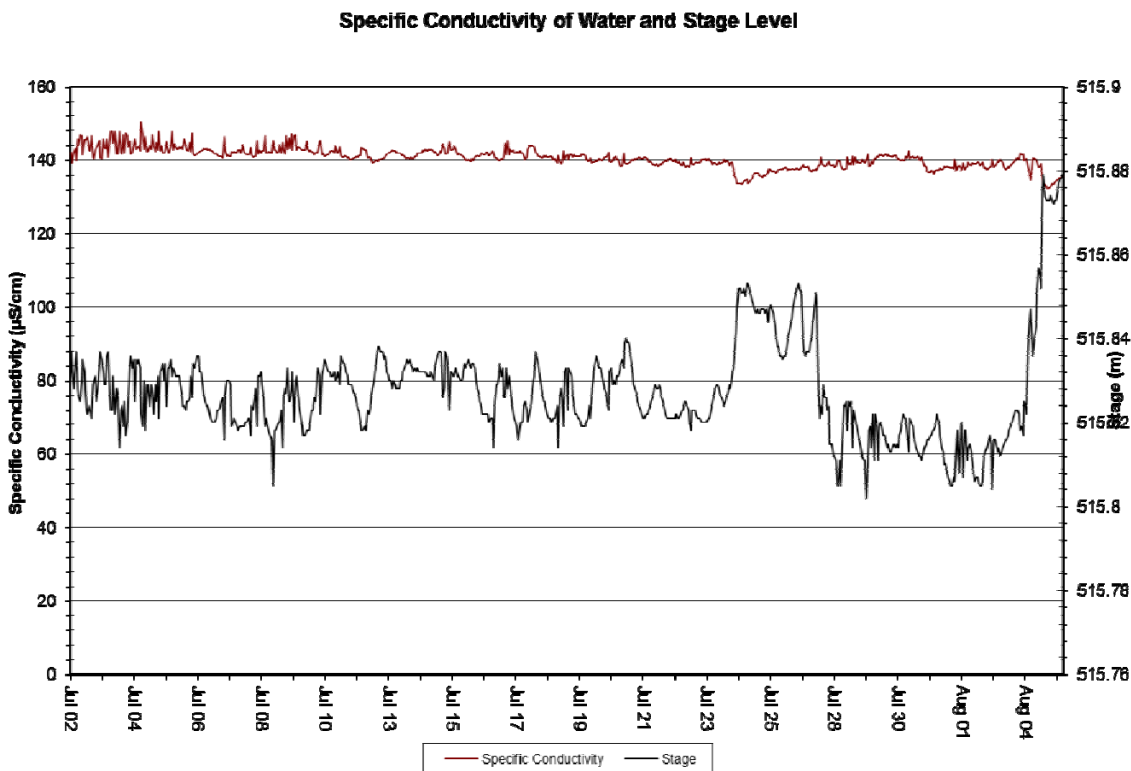


Figure 7: Specific conductivity ( $\mu\text{S}/\text{cm}$ ) at James Creek from July 2, 2013 to August 5, 2013

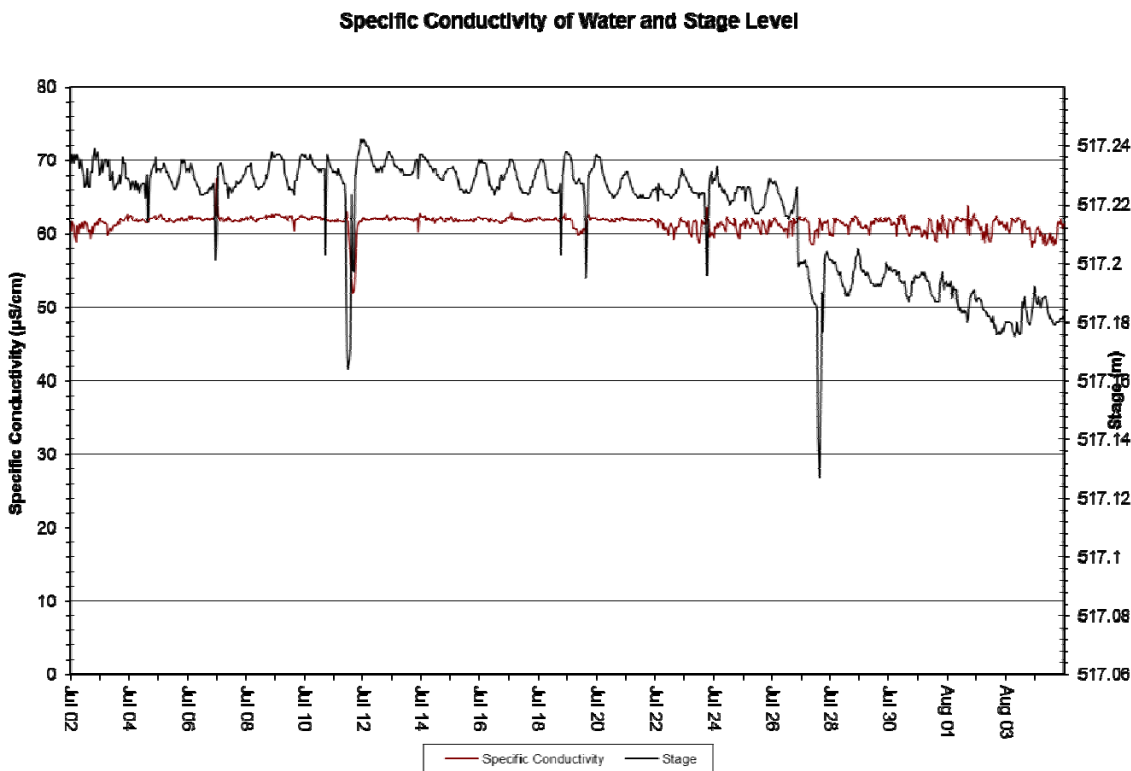


Figure 8: Specific conductivity ( $\mu\text{S}/\text{cm}$ ) at Unnamed Tributary - July 2, 2013 to August 5, 2013

## Dissolved Oxygen

- Dissolved Oxygen [DO] values ranged from 8.55 mg/l (87.8% saturation) to 10.71 mg/l (101.6% saturation) at James Creek and from 11.12 mg/l (83.4% saturation) to 13.70 mg/l (105.6% saturation) at Unnamed Tributary from July 2, 2013 to August 5, 2013 (Figures 9 & 10).
- DO (mg/l & % saturation) shows a clear diurnal fluctuation at both James Creek and Unnamed Tributary. These diurnal fluctuations can be attributed to the diurnal temperature fluctuations.
- DO (mg/l & % saturation) remained relatively stable for the duration of the deployment for both James Creek and Unnamed Tributary.
- The DO values at Unnamed Tributary were above the cold water minimum guideline set for aquatic life during early life stages (9.5 mg/l), and above minimum guideline set for other life stages (6.5 mg/l), as determined by the Canadian Council of Ministers of the Environment (2007). With an average of 9.66 mg/l, the dissolved oxygen at James Creek was at, or above, the cold water minimum guideline and well above the minimum guideline set for other life stages (6.5 mg/l).

**Dissolved Oxygen Concentration and Saturation**

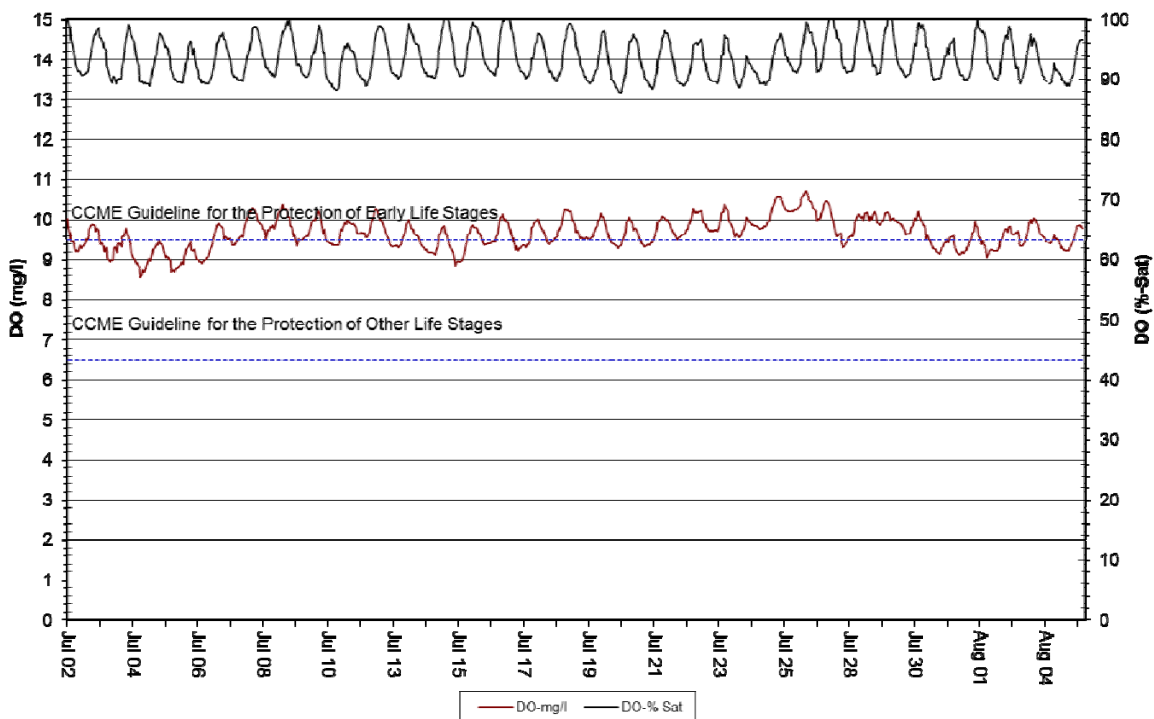


Figure 9: DO (mg/l & % saturation) at James Creek from July 2, 2013 to August 5, 2013

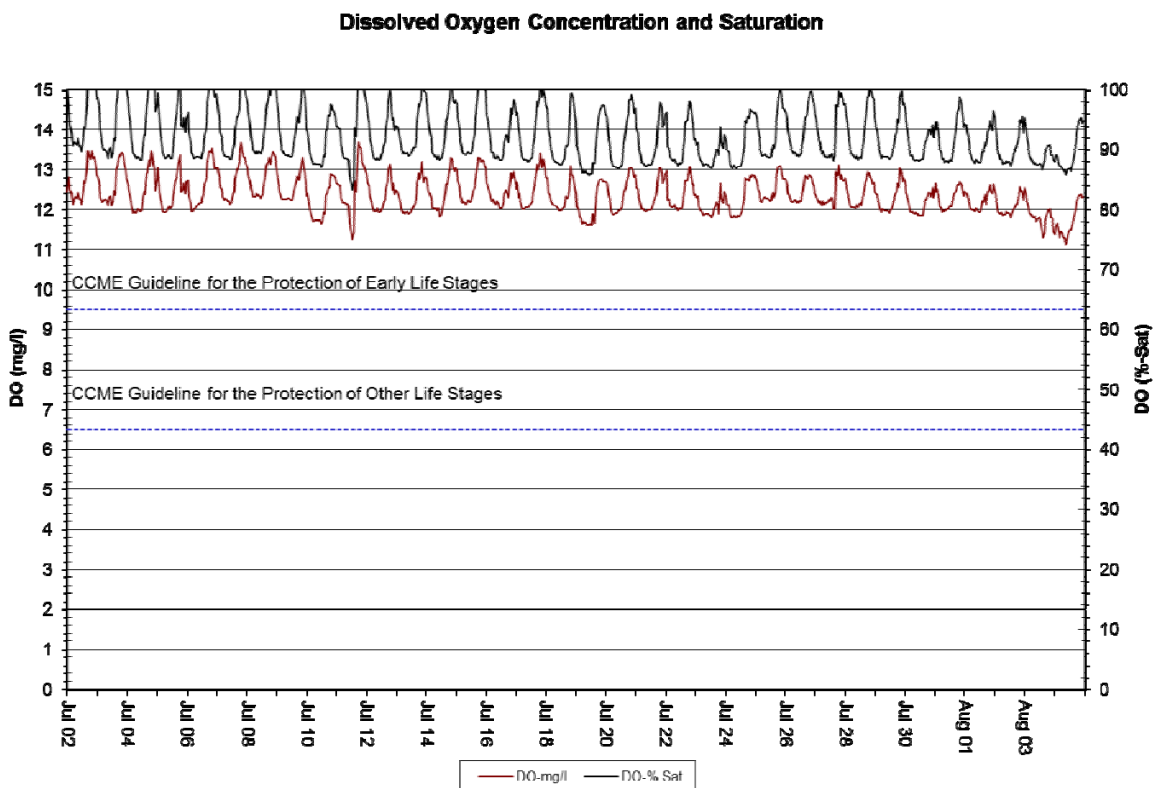


Figure 10: DO (mg/l & % saturation) at Unnamed Tributary from July 2, 2013 to August 5, 2013

## Turbidity

- Turbidity values ranged from 5.3 NTU to 332.6 NTU at James Creek and from 0.0 NTU to 115.3 NTU at Unnamed Tributary from July 2, 2013 to August 5, 2013 (Figures 11 & 12).
- There were several turbidity events at James Creek and Unnamed Tributary (see inside red ovals – Figures 11 & 12) which all seem to coincide with increases in flow that are due to significant rainfall events. Given the level of ground disturbance related to mining activity inside these drainage areas it is not surprising that significant rainfall events cause siltation and elevate turbidity levels.

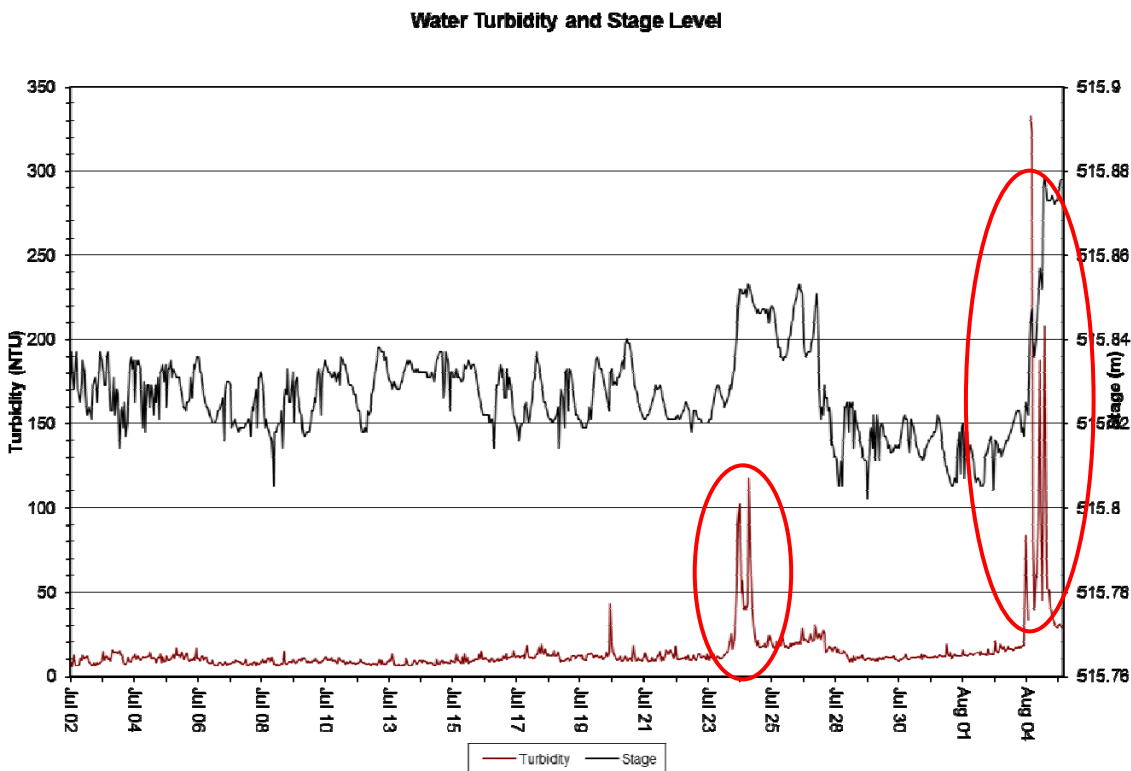


Figure 11: Turbidity (NTU) at James Creek from July 2, 2013 to August 5, 2013

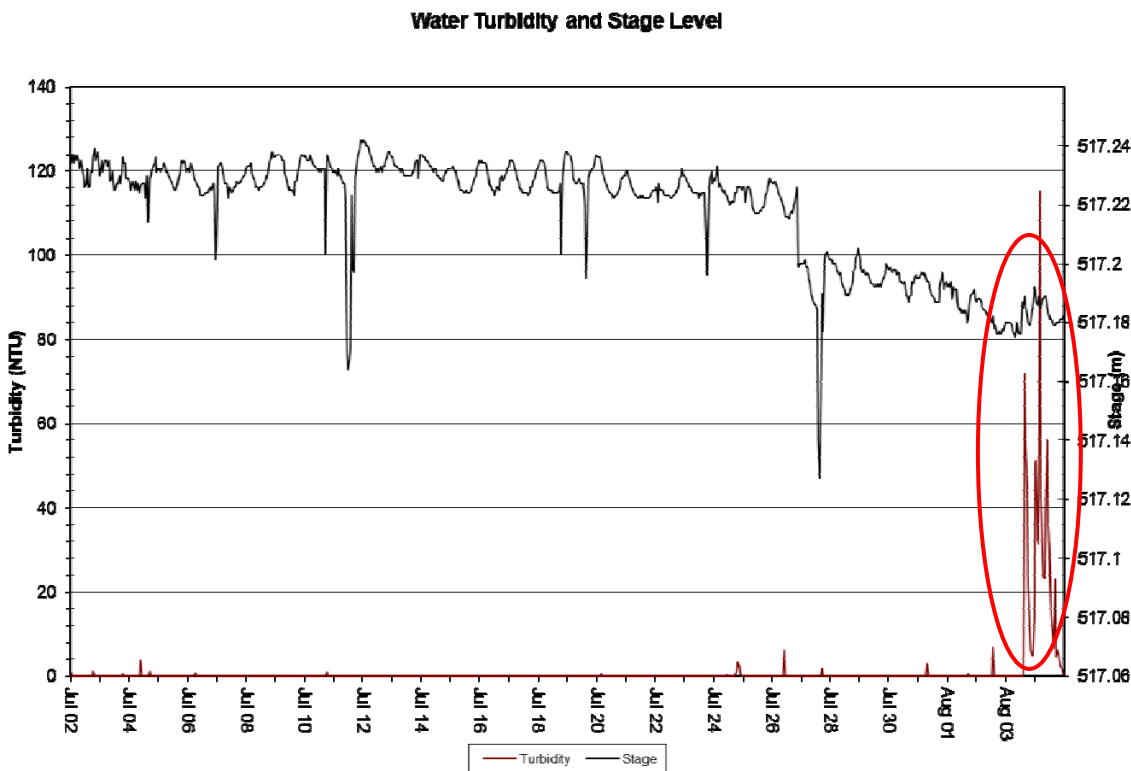


Figure 12: Turbidity (NTU) at Unnamed Tributary from July 2, 2013 to August 5, 2013

## Conclusion

- This monthly deployment report presents water quality and water quantity data recorded at the James Creek and Unnamed Tributary stations from July 2, 2013 to August 5, 2013.
- The performances of all sensors were rated fair to excellent at the beginning of the deployment period and poor to excellent at the end. The poor rating for Turbidity at the end of the James Creek deployment could be the result of a variety of variables such as; organic debris accumulated on the sensors after a month long deployment, short term variation in turbidity between the area where the field sonde was located and where the QA/QC reading was taken, the field turbidity sensor drifting significantly off calibration, or some other undetermined variable.
- Variations in water quality/quantity values recorded at each station are summarized below:
  - For Unnamed Tributary there appears to be a gentle declining trend in stage height over the duration of the deployment while for James Creek the stage height is relatively stable for the first half of the deployment, with some variability after that and a rapid increase in the last few days of the deployment.
  - Temperatures at both stations remained relatively stable over the deployment period with no obvious increasing or decreasing trends. Diurnal fluctuations in water temperature correspond with diurnal fluctuations in air temperature.
  - Water temperatures at the Unnamed Tributary were on average 8.36°C colder than water temperatures at James Creek. This temperature difference is largely due to a large volume of ground water which is discharged into Unnamed Tributary from deep groundwater dewatering wells which make up the majority of flow in this stream.
  - pH was very stable throughout the deployment period at both James Creek and Unnamed Tributary, however both stations show regular diurnal fluctuations which are related to the diurnal temperature fluctuations.
  - Specific conductivity readings were fairly consistent at James Creek and Unnamed Tributary during the deployment period.
  - DO (mg/l & % saturation) remained relatively stable for the duration of the deployment for both James Creek and Unnamed Tributary, however clear diurnal fluctuations were visible. These diurnal fluctuations can be attributed to the diurnal temperature fluctuations.
  - There were several turbidity events at James Creek and Unnamed Tributary which coincided with increases in flow related to rainfall events. Given the level of ground disturbance related to mining activity inside these drainage areas it is not surprising that significant rainfall events cause siltation and elevate turbidity levels.

## References

Canadian Council of Ministers of the Environment. 2007. Canadian water quality guidelines for the protection of aquatic life: Summary table. Updated December, 2007. In: Canadian environmental quality guidelines, 1999, Canadian Council of Ministers of the Environment, Winnipeg. (Website: <http://ceqg-rcqe.ccme.ca/download/en/222/>)



## APPENDIX A

### Quality Assurance / Quality Control Procedures

- As part of the Quality Assurance / Quality Control (QA/QC) protocol, the performance of a station's water quality instrument (i.e., Field Sonde) is rated at the beginning and end of its deployment period. The procedure is based on the approach used by the United States Geological Survey (Wagner *et al.* 2006)<sup>1</sup>.
- At the beginning of the deployment period, a fully cleaned and calibrated QA/QC water quality instrument (i.e., QA/QC Sonde) is placed *in-situ* with the fully cleaned and calibrated Field Sonde. After Sonde readings have stabilized, which may take up to five minutes in some cases, water quality parameters, as measured by both Sondes, are recorded to a field sheet. Field Sonde performance for all parameters is rated based on differences recorded by the Field Sonde and QA/QC Sonde. If the readings from both Sondes are in close agreement, the QA/QC Sonde can be removed from the water. If the readings are not in close agreement, there will be attempts to reconcile the problem on site (e.g., removing air bubbles from sensors, etc.). If no fix is made, the Field Sonde may be removed for recalibration.
- At the end of the deployment period, a fully cleaned and calibrated QA/QC Sonde is once again deployed *in-situ* with the Field Sonde, which has already been deployment for 30-40 days. After Sonde readings have stabilized, water quality parameters, as measured by both Sondes, are recorded to a field sheet. Field Sonde performance for all parameters is rated based on differences recorded by the Field Sonde and QA/QC Sonde.
- Performance ratings are based on differences listed in the table below.

Parameter	Rating				
	Excellent	Good	Fair	Marginal	Poor
Temperature (°C)	$\leq \pm 0.2$	$> \pm 0.2$ to 0.5	$> \pm 0.5$ to 0.8	$> \pm 0.8$ to 1	$> \pm 1$
pH (unit)	$\leq \pm 0.2$	$> \pm 0.2$ to 0.5	$> \pm 0.5$ to 0.8	$> \pm 0.8$ to 1	$> \pm 1$
Sp. Conductance ( $\mu\text{S}/\text{cm}$ )	$\leq \pm 3$	$> \pm 3$ to 10	$> \pm 10$ to 15	$> \pm 15$ to 20	$> \pm 20$
Sp. Conductance $> 35 \mu\text{S}/\text{cm}$ (%)	$\leq \pm 3$	$> \pm 3$ to 10	$> \pm 10$ to 15	$> \pm 15$ to 20	$> \pm 20$
Dissolved Oxygen (mg/l) (% Sat)	$\leq \pm 0.3$	$> \pm 0.3$ to 0.5	$> \pm 0.5$ to 0.8	$> \pm 0.8$ to 1	$> \pm 1$
Turbidity $< 40$ NTU (NTU)	$\leq \pm 2$	$> \pm 2$ to 5	$> \pm 5$ to 8	$> \pm 8$ to 10	$> \pm 10$
Turbidity $> 40$ NTU (%)	$\leq \pm 5$	$> \pm 5$ to 10	$> \pm 10$ to 15	$> \pm 15$ to 20	$> \pm 20$

<sup>1</sup> Wagner, R.J., Boulger, R.W., Jr., Oblinger, C.J., and Smith, B.A., 2006, Guidelines and standard procedures for continuous water-quality monitors—Station operation, record computation, and data reporting: U.S. Geological Survey Techniques and Methods 1–D3, 51 p. + 8 attachments; accessed April 10, 2006, at <http://pubs.water.usgs.gov/tm1d3>

## APPENDIX B

### Environment Canada Weather Data – Schefferville (July 2, 2013 to August 5, 2013)

Date/Time	Max Temp (°C)	Min Temp (°C)	Mean Temp (°C)	Heat Deg Days (°C)	Cool Deg Days (°C)	Total Rain Flag	Total Snow Flag	Total Precip (mm)
7/2/2013	23.6	6.1	14.9	3.1	0	M	M	0
7/3/2013	23.6	10.3	17	1	0	M	M	0
7/4/2013	28.8	10.5	19.7	0	1.7	M	M	0
7/5/2013	24.8	12.2	18.5	0	0.5	M	M	0
7/6/2013	22.5	6.1	14.3	3.7	0	M	M	2.1
7/7/2013	10.6	3.6	7.1	10.9	0	M	M	0.3
7/8/2013	11.6	3.5	7.6	10.4	0	M	M	1.6
7/9/2013	19.3	5.4	12.4	5.6	0	M	M	0
7/10/2013	23.8	8.5	16.2	1.8	0	M	M	8.8
7/11/2013		14.6				M	M	1.3
7/12/2013	18.3	8.6	13.5	4.5	0	M	M	3.3
7/13/2013	21.7	15.1	18.4	0	0.4	M	M	3.8
7/14/2013	24.6	16.3	20.5	0	2.5	M	M	0
7/15/2013	18.4	8	13.2	4.8	0	M	M	5.5
7/16/2013	17.9	6.3	12.1	5.9	0	M	M	0
7/17/2013	18.8	6	12.4	5.6	0	M	M	5.8
7/18/2013	14.7	5.5	10.1	7.9	0	M	M	0
7/19/2013	21.2	8.2	14.7	3.3	0	M	M	12.6
7/20/2013	14.5	5.1	9.8	8.2	0	M	M	4.8
7/21/2013	12.1	4.5	8.3	9.7	0	M	M	1.8
7/22/2013	9.2	4.6	6.9	11.1	0	M	M	1.6
7/23/2013	14.5	7.2	10.9	7.1	0	M	M	4.8
7/24/2013	9.8	6.4	8.1	9.9	0	M	M	41.9
7/25/2013	11.6	3.8	7.7	10.3	0	M	M	0.8
7/26/2013	18.6	3.7	11.2	6.8	0	M	M	1.4
7/27/2013	21.3	6.7	14	4	0	M	M	0.3
7/28/2013	22.3	6.2	14.3	3.7	0	M	M	0
7/29/2013	22.6	11.6	17.1	0.9	0	M	M	0
7/30/2013	21.6	13.4	17.5	0.5	0	M	M	0.3
7/31/2013	19.3	11.3	15.3	2.7	0	M	M	2
8/1/2013	23.6	8.7	16.2	1.8	0	M	M	0
8/2/2013	23.1	12.6	17.9	0.1	0	M	M	9.8
8/3/2013	17.2	12.9	15.1	2.9	0	M	M	22
8/4/2013	14.6	10.5	12.6	5.4	0	M	M	27.9
8/5/2013	15.3	9.9	12.6	5.4	0	M	M	4.8