

# Real-Time Water Quality Report

## Canada Fluorspar (NL) Inc, Real-Time Water Quality Stations

Deployment Period  
October 1, 2025 to November 25, 2025



Government of Newfoundland & Labrador  
Department of Environment, Conservation &  
Climate Change  
Water Resources Management Division

Prepared by:

Tara Clinton & Victoria Hollohan  
Environmental Scientist  
Water Resources Management Division  
Department of Environment, Conservation & Climate Change  
4th Floor, Confederation Building, West Block  
PO Box 8700, St. John's NL A1B 4J6  
[taracanton@gov.nl.ca](mailto:taracanton@gov.nl.ca) & [victoriahollohan@gov.nl.ca](mailto:victoriahollohan@gov.nl.ca)

## General

The Water Resources Management Division (WRMD) maintains real-time water quality and water quantity monitoring stations in John Fitzpatrick Pond and on Outflow of Unnamed Pond south of Long Pond, within the site of Canada Fluorspar (NL) Inc, St. Lawrence, Newfoundland & Labrador.

### John Fitzpatrick Pond

The site was selected based on the location and consistent water supply throughout the year. It provides stable and beneficial water quality data for this site (Figure 1).

The Real Time station is established on the northwest bank of John Fitzpatrick Pond, close to the only outflow from the pond. This pond is surrounded by natural habitat on the northeast side, and on the southwest side bordered by the CFI mine (Figure 1). There are two small brooks that periodically flow into this pond. This station monitors the water quality and the stage level of the pond. The instrument is deployed, at a depth of approximately 1.0 meter. The GPS coordinates for this site are as follows: N 46° 54' 47.95" W 055° 27' 46.97" (Figure 1).



Figure 1: Real-Time Station at John Fitzpatrick Pond. Station hut (left) and instrument deployed in pond (right)

### **Outflow of Unnamed Pond south of Long Pond**

The Outflow of Unnamed Pond south of Long Pond is established downstream of the Tailings Management Facility (TMF). This station provides near real-time water quality and quantity data to ensure emerging issues associated with the TMF are detected, to allow the appropriate mitigation measures to be implemented in a timely manner, thus reducing any adverse effect on the downstream systems.

The location of Outflow of Unnamed Pond south of Long Pond was selected due to accessibility to the brook and the sufficient pool available to place the water quality and quantity instruments (See Figure 2). The stream originates from a small unnamed pond and meanders through a marsh environment alongside the TMF. The stream is approximately 1.0 to 2.0 meters wide. Where the instrument is deployed, there is a depth of approximately 1.0 to 1.5 meters. The GPS coordinates for this site are as follows: N46° 54' 14.1" W055° 26' 37.5". The station hut was placed on the right bank looking downstream approximately 8 meters from the stream (Figure 2).



**Figure 2: Real-Time Water Quality and Quantity Station at Outflow of Unnamed Pond south of Long Pond. Station hut (left) and instrument deployed in brook (right).**

## Quality Assurance and Quality Control

WRMD staff are responsible for maintenance and calibration of the real-time water quality monitoring equipment, as well as recording and managing the water quality data. As part of the Quality Assurance and Quality Control protocol (QA/QC), an assessment of the reliability of data recorded by an instrument is conducted at the beginning and end of the deployment period. The procedure is based on the approach used by the United States Geological Survey.

During deployment and removal, a QA/QC Sonde is temporarily deployed adjacent to the Field Sonde. Based on the degree of difference between the parameters on the Field Sonde and QA/QC Sonde at deployment and at removal, a qualitative statement is made on the data quality (Table 1). Values for temperature, pH, conductivity, dissolved oxygen, and turbidity are compared between the two instruments (Table 2). Additionally, grab samples are collected during deployment to compare pH, specific conductivity and turbidity values between the field instrument and grab samples (Table 3).

**Table 1: Instrument Performance Ranking classifications for deployment and removal**

Parameter	Rank				
	Excellent	Good	Fair	Marginal	Poor
Temperature (°C)	<=+/-0.2	>+/-0.2 to 0.5	>+/-0.5 to 0.8	>+/-0.8 to 1	<+/-1
pH (unit)	<=+/-0.2	>+/-0.2 to 0.5	>+/-0.5 to 0.8	>+/-0.8 to 1	>+/-1
Sp. Conductance (µS/cm)	<=+/-3	>+/-3 to 10	>+/-10 to 15	>+/-15 to 20	>+/-20
Sp. Conductance > 35 µS/cm (%)	<=+/-3	>+/-3 to 10	>+/-10 to 15	>+/-15 to 20	>+/-20
Dissolved Oxygen (mg/L) (% Sat)	<=+/-0.3	>+/-0.3 to 0.5	>+/-0.5 to 0.8	>+/-0.8 to 1	>+/-1
Turbidity <40 NTU (NTU)	<=+/-2	>+/-2 to 5	>+/-5 to 8	>+/-8 to 10	>+/-10
Turbidity > 40 NTU (%)	<=+/-5	>+/-5 to 10	>+/-10 to 15	>+/-15 to 20	>+/-20

It's important to note that the temperature sensor on any sonde is crucial. All other parameters can be categorized into subgroups: temperature-dependent, temperature-compensated, and temperature-independent. Due to the temperature sensor's placement on the sonde, the entire sonde must be at a constant temperature before the temperature sensor stabilizes. The values may take some time to reach the appropriate reading; if a reading is taken too soon, it may not accurately represent the conditions of the water body.

**Table 2: QA/QC vs. Field Instrument performance rankings**

Station	Date	Action	Temp	pH	Comparison Ranking		
					Conductivity	Dissolved Oxygen	Turbidity
John Fitzpatrick	Oct 1, 2025	Deployment	Excellent	Excellent	Good	Excellent	Excellent
	Nov 25, 2025	Removal	Excellent	Good	Excellent	Excellent	Excellent
Unnamed Pond	Oct 1, 2025	Deployment	Excellent	Excellent	Good	Excellent	Excellent
	Nov 25, 2025	Removal	Excellent	Excellent	Excellent	Good	Excellent

## Hydrometric Data

Water Resources Management Division hydrometric (stage and flow) data is quality controlled on a less frequent basis than water quality data due to differences in protocols. The hydrometric data shown in this report is provisional and has not undergone quality control checks.

## John Fitzpatrick Pond

### Water Temperature

Water temperatures ranged from 4.55°C to 14.67°C during the deployment period, with an average of 10.24°C. As expected with the seasonal transition from fall into the cooler temperatures of winter, the water temperature steadily decreased throughout the period. A natural diurnal pattern was observed, with warmer temperatures during daylight hours and cooler temperatures at night (Figure 3).

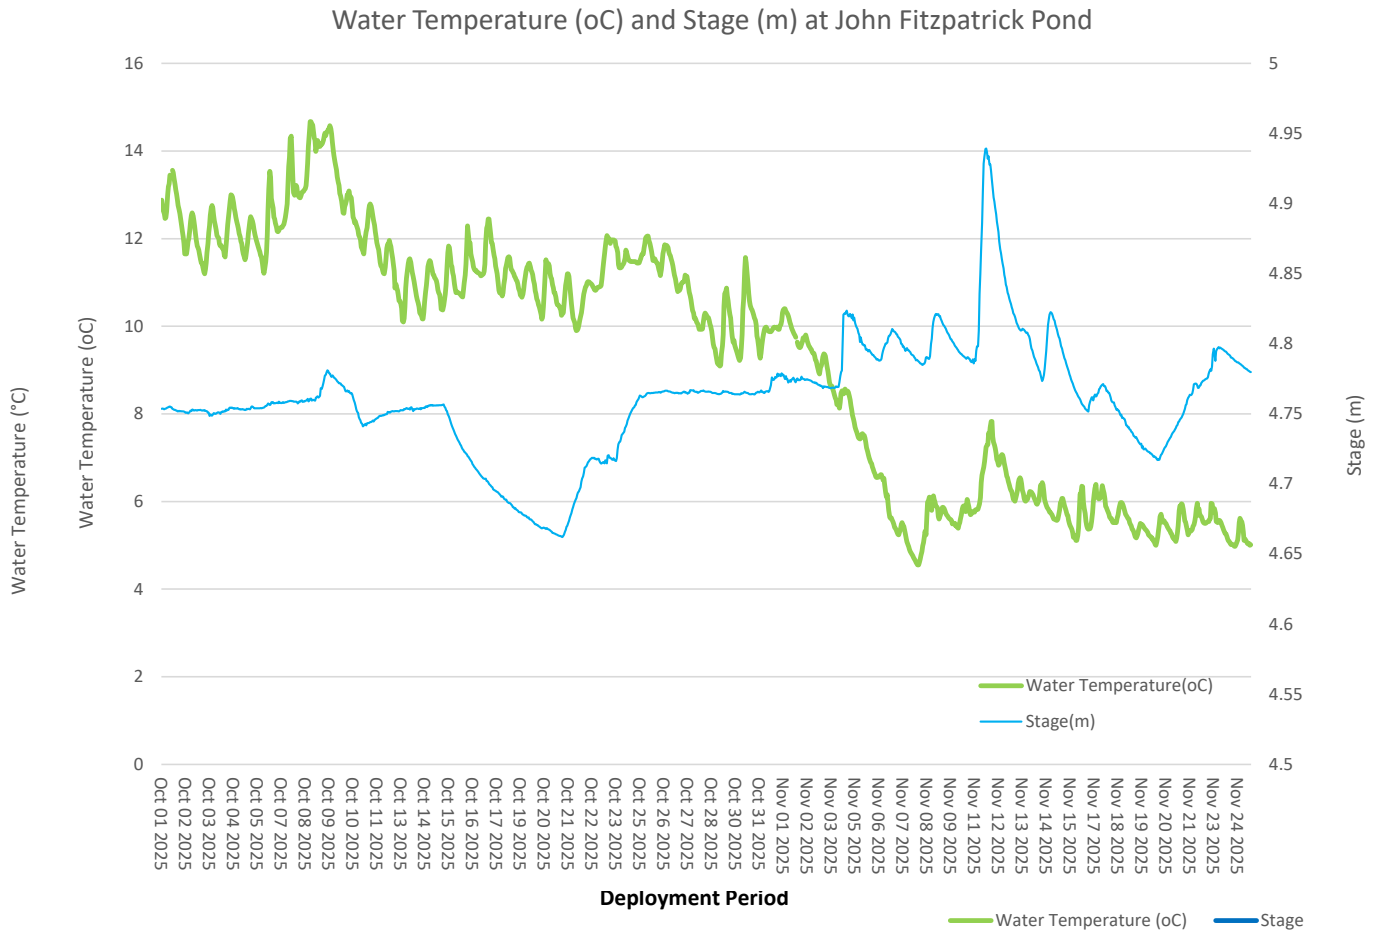
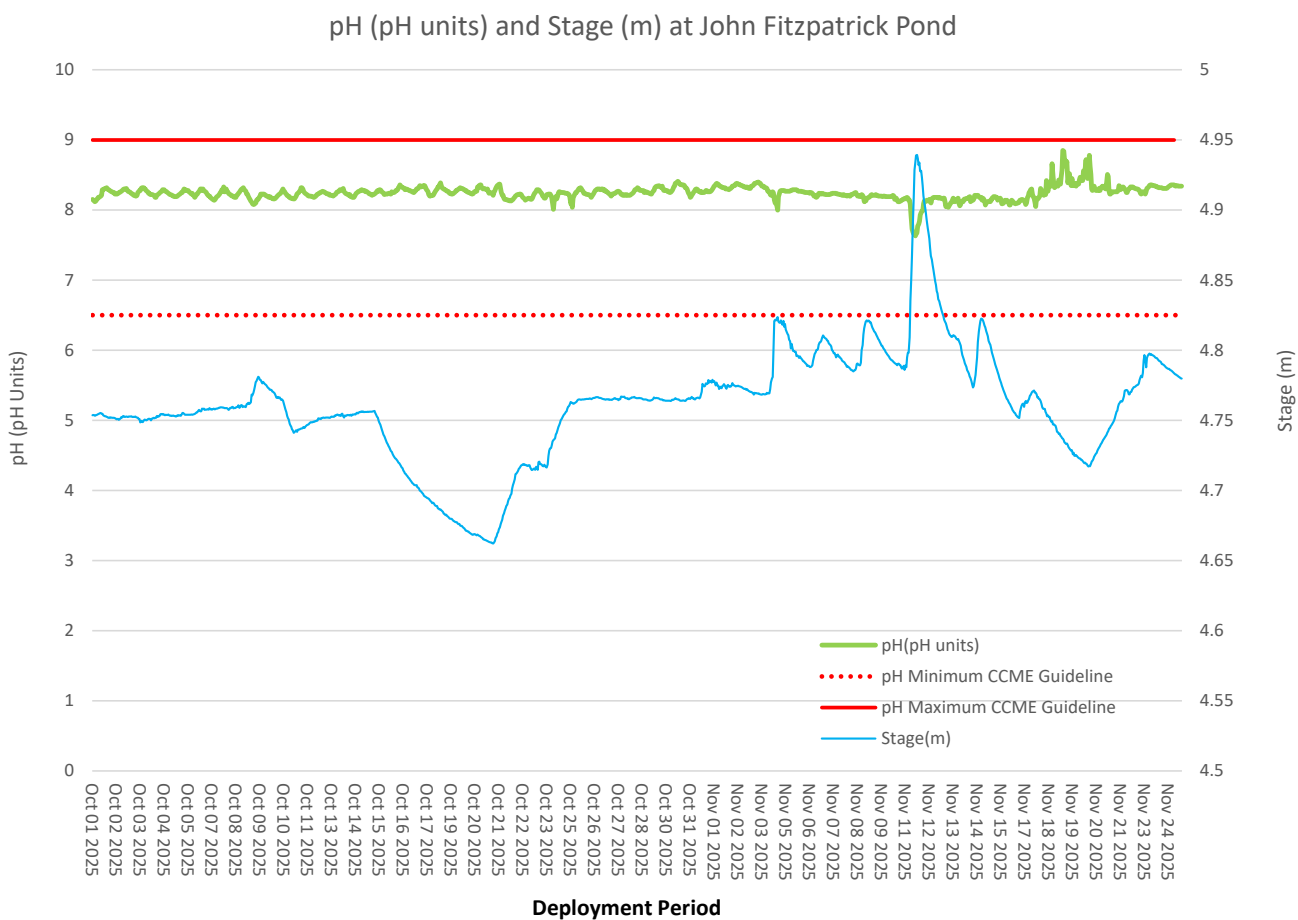


Figure 3: Water temperature at John Fitzpatrick Pond RTWQ Station (°C)

**pH**

Throughout the deployment period, pH values ranged from 7.6 to 8.9, with an average of 8.2 (Figure 4). The pH levels remained stable and consistent, with only minor fluctuations attributed to precipitation events.

A pH sensor measures the acidity or alkalinity of a water body. pH is a critical parameter because it influences the solubility of minerals and chemicals, the availability of nutrients, and the biological processes that occur in aquatic ecosystems. Most aquatic organisms have a preferred pH range for optimal growth and survival, and deviations from this range can have significant ecological implications. The pH data at John Fitzpatrick Pond remained within the Canadian Council of Ministers of the Environment (CCME) guidelines of 6.5-9.0 pH units for the protection of aquatic life for the duration of the deployment period (Figure 4).



**Figure 4: pH (pH units) values at John Fitzpatrick Pond RTWQ Station**

### Specific Conductivity

The specific conductivity levels were within 143.82  $\mu\text{S}/\text{cm}$  and 251.37  $\mu\text{S}/\text{cm}$  during this deployment period, with an average of 220.2  $\mu\text{S}/\text{cm}$  (Figure 5). Conductivity remained relatively consistent across the deployment period. Dips in conductivity levels are likely a result of a precipitation event as stage increased at the same time. The rain dilutes the water column for a short period of time, which reduces the concentration of any suspended particles or diluted salts. Spikes in conductivity levels can likely be attributed to pumping of the open pits.

Specific conductivity is commonly used as an indicator of the concentration of dissolved ions in water. These ions can include electrolytes like salts, acids, and bases. The higher the concentration of dissolved ions, the higher the specific conductivity of the water.

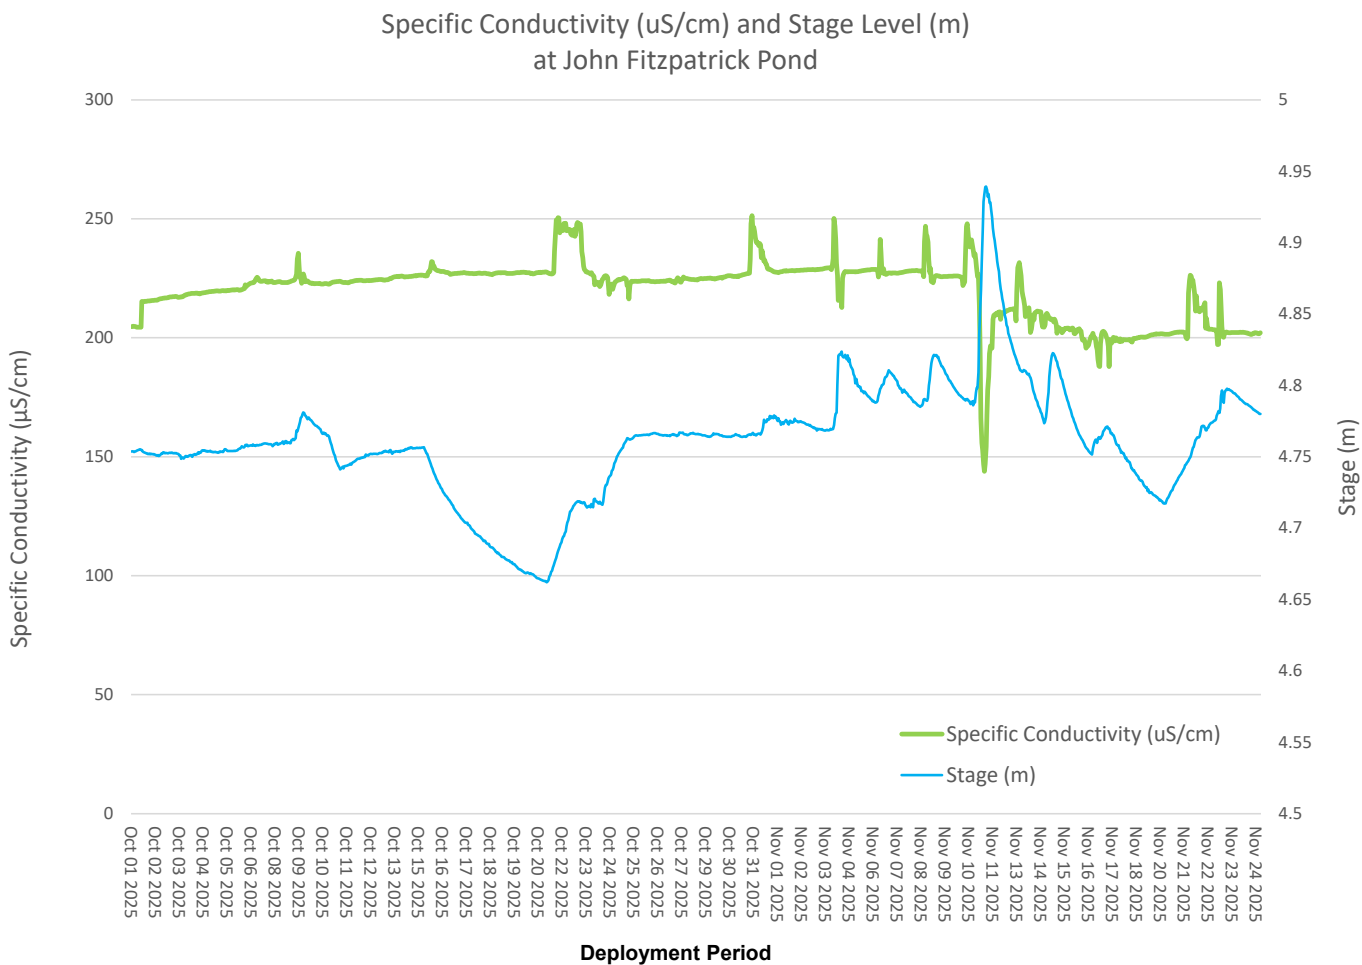


Figure 5: Specific conductivity ( $\mu\text{S}/\text{cm}$ ) values at John Fitzpatrick Pond RTWQ Station

## Dissolved Oxygen

Throughout the deployment, dissolved oxygen (DO) concentrations ranged from 10.1 mg/L to 12.92 mg/L, with corresponding DO percent saturation levels varying from 94.8% to 111.1% (Figure 6). All values remained above the CCME Guidelines for the Protection of Aquatic Life throughout the deployment. DO concentrations increased slightly towards the end of the deployment period as expected given the decrease in water temperature.

The DO probe measures oxygen directly dissolved in the water in milligrams per liter (mg/L). The instrument then calculates percent saturation (% Sat), considering the water temperature. Dissolved oxygen levels can vary based on factors such as temperature, pressure, and the presence of other dissolved substances. Cooler water holds more dissolved oxygen than warmer water. Additionally, the presence of organic matter, pollutants, and certain chemical reactions can influence dissolved oxygen levels.

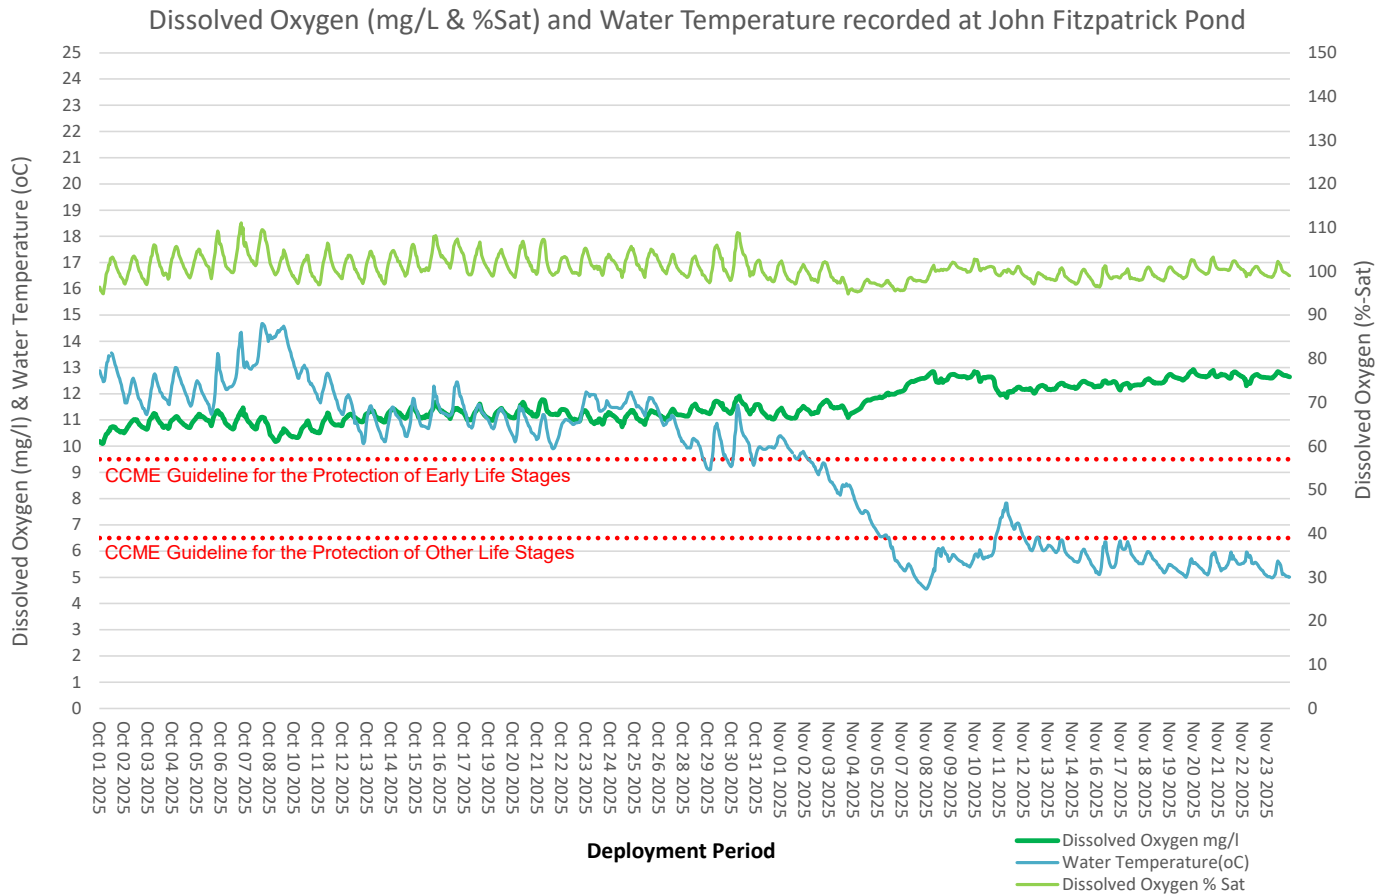


Figure 6: Dissolved Oxygen (mg/L & Percent Saturation) values and Water Temperature (°C) at John Fitzpatrick Pond RTWQ Station

### Turbidity

Turbidity levels during the deployment ranged within 0.0 NTU and 36.2 NTU, with an average of 1.3 NTU. During a site visit to this station, it was noted that the pond was clear with a rocky bottom made up of large rocks (Figure 1). At this time there was dewatering occurring into John Fitzpatrick Pond. Turbidity remained low throughout the deployment period, with the exception of a spike on November 4<sup>th</sup>, 2025 at 36.2 NTU.

Turbidity then remained elevated until the end of deployment, indicating the sensor may have sediment built up around it. Smaller spikes in turbidity can be attributed to precipitation events, which can increase run-off and disturb sediment on the waterbed, temporarily increasing turbidity.

Turbidity sensors use light scattering or absorption principles to quantify the degree of cloudiness in the water. Turbidity is caused by suspended particles, such as silt, clay, organic matter, and plankton, that scatter and absorb light.

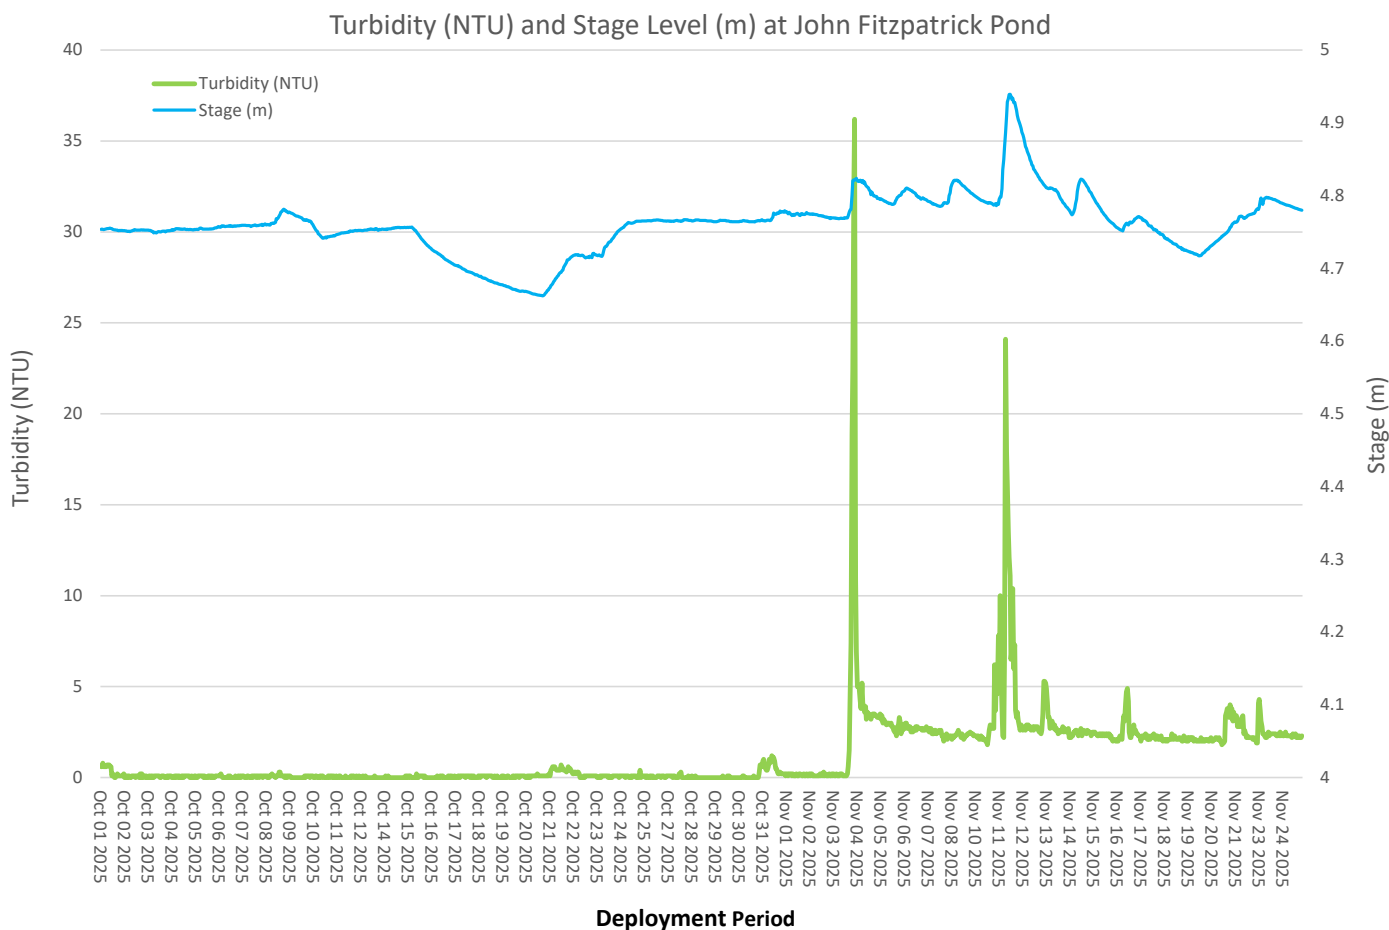


Figure 7: Turbidity (NTU) values at John Fitzpatrick Pond RTWQ Station

### Stage Level

Stage is an estimation of water level at the station and can account for variations in water quality parameters (e.g., specific conductivity, dissolved oxygen, turbidity). The stage ranged between 4.66m and 4.93m throughout the deployment. Significant peaks in stage align with total precipitation events, as indicated in Figure 8.

Total Precipitation data was obtained from Environment Canada’s St. Lawrence weather station. Throughout the deployment period, precipitation ranged from 0.0mm to a the highest total of 17.9mm on November 11, 2025.

*Water Resources Management Division hydrometric data is quality controlled on a less frequent basis than water quality data due to differences in protocols. The hydrometric data shown in this report is provisional and has not undergone quality control checks.*

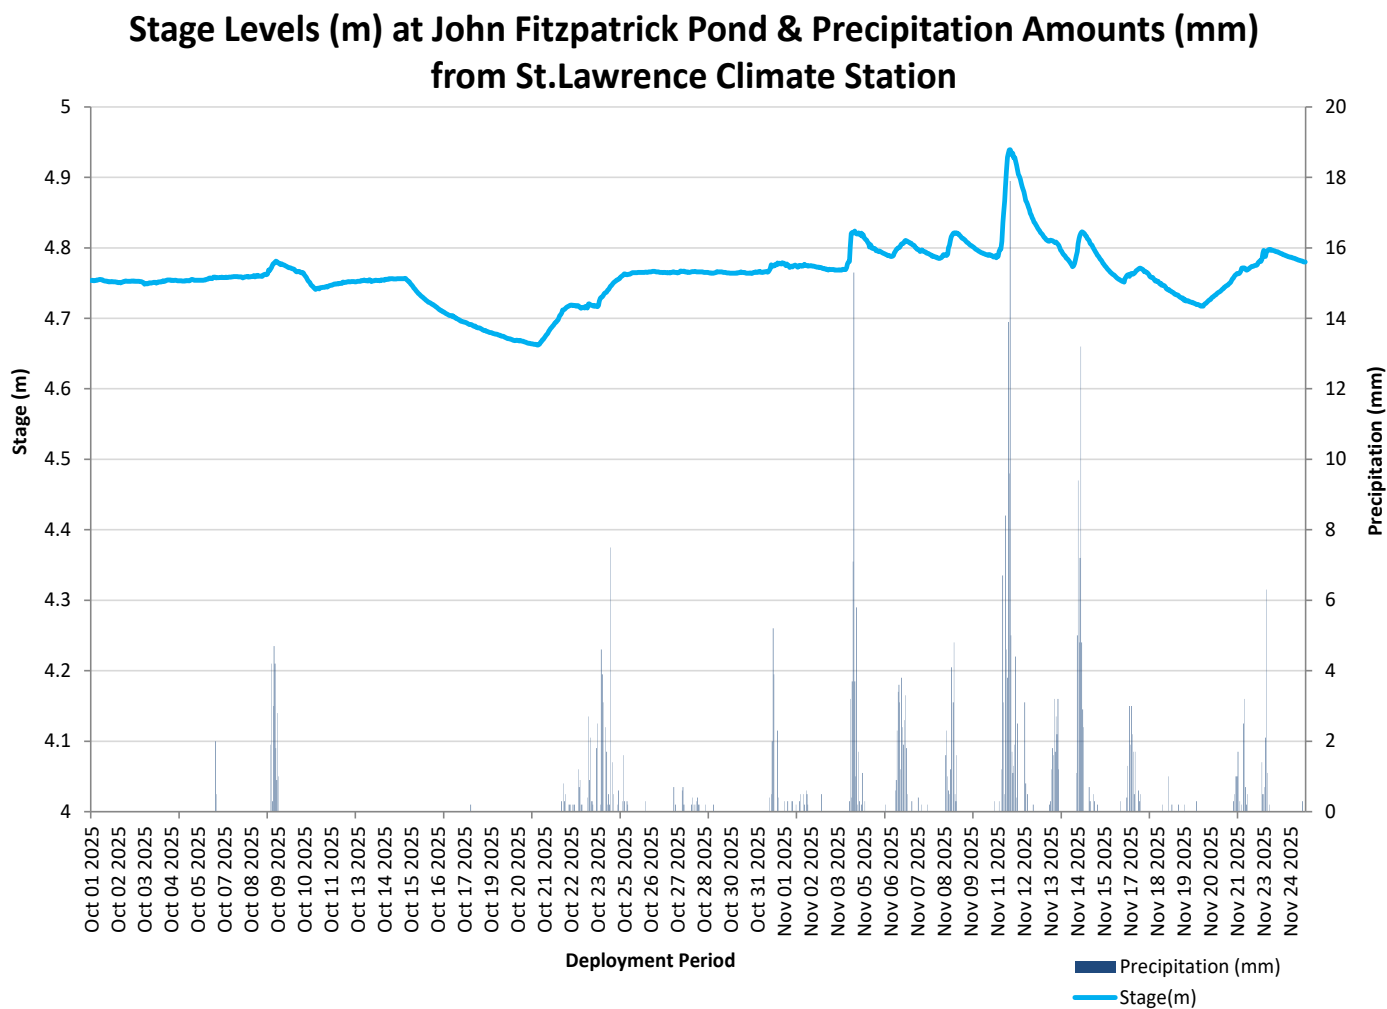


Figure 8: Stage values at John Fitzpatrick Pond RTWQ Station

### Outflow of Unnamed Pond south of Long Pond

#### Water Temperature

Water temperature ranged from 1.88°C to 18.08°C during the deployment period, with an average of 8.56°C (Figure 9). Temperature steadily increased throughout the deployment period which would be expected with the seasonal transition into late Fall.

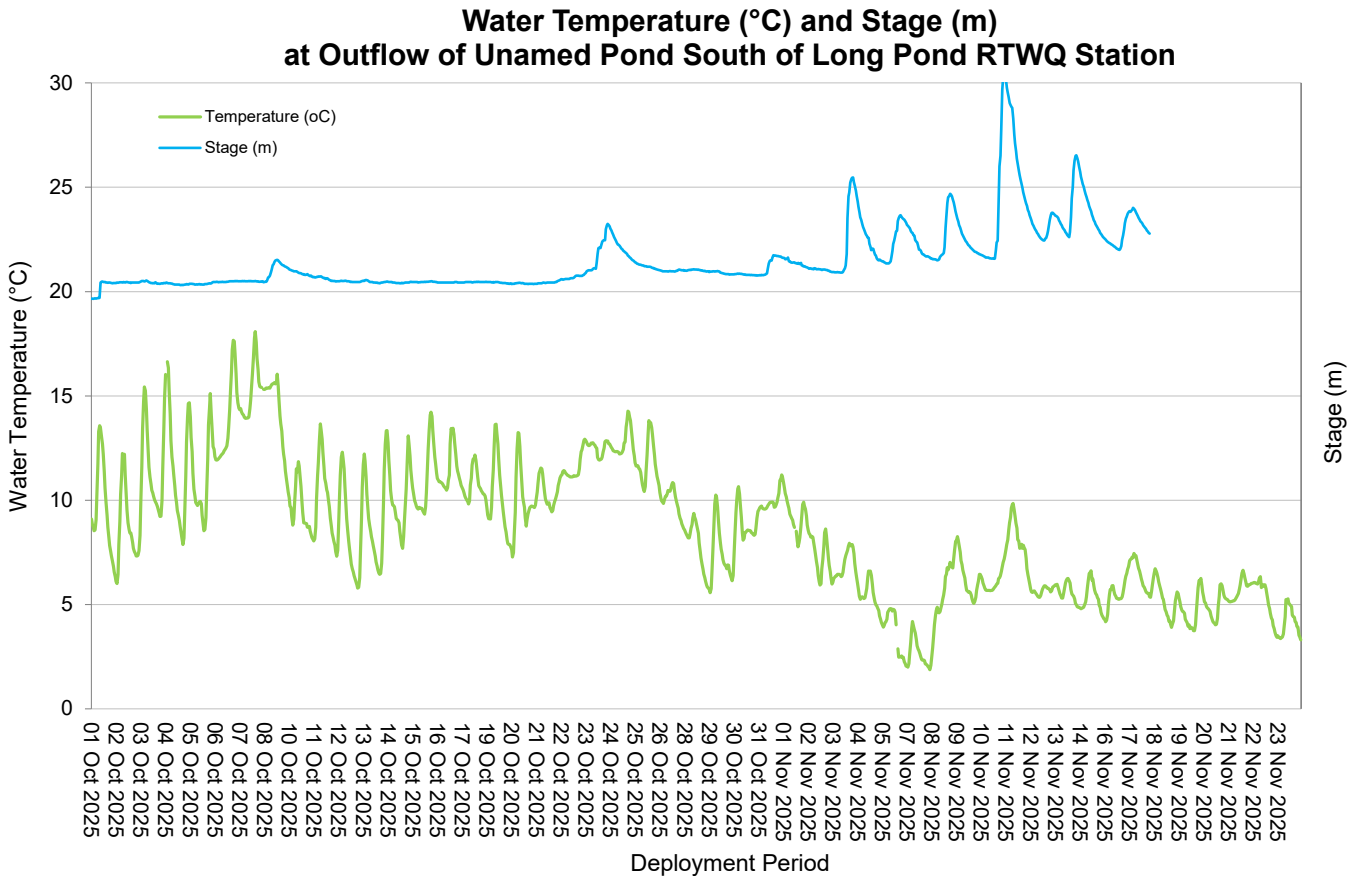


Figure 9: Water temperature (°C) values at Outflow of Unnamed Pond south of Long Pond RTWQ station

### pH

Throughout this deployment period, pH values ranged within 6.96 pH units and 8.15 pH units with an average of 7.82 pH units (Figure 10), remaining within the Canadian Council of Ministers of the Environment (CCME) Guidelines for aquatic life of 6.5-9.0 pH units.

pH responds with dips during the slight increases in stage. After these small decreases, pH does return to background levels after each event. Overall, the pH data was consistent across deployment.

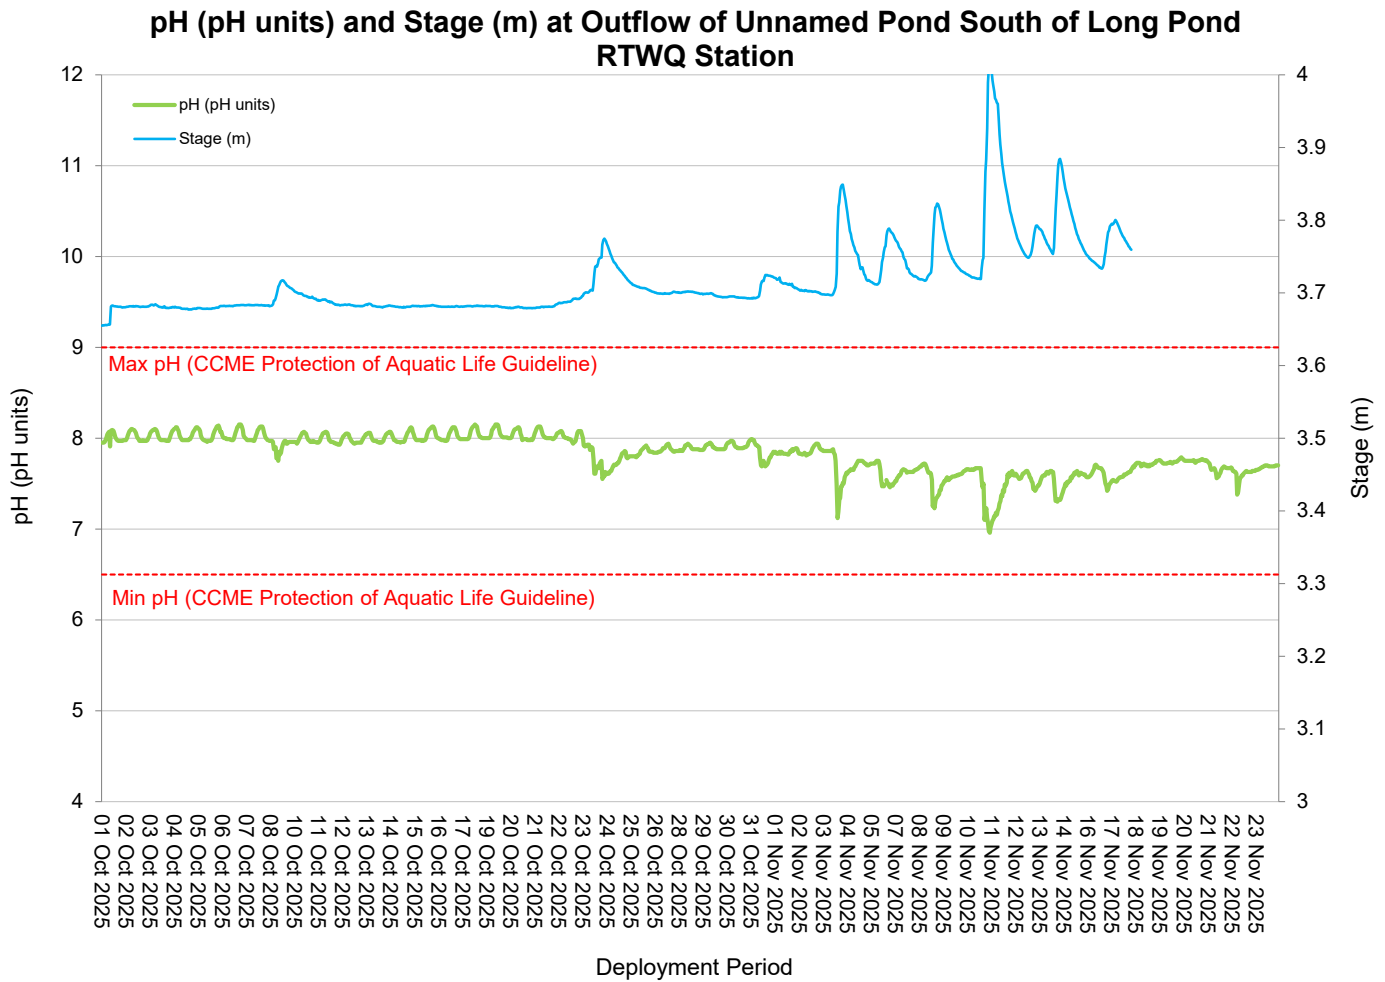


Figure 10: pH (pH units) at Outflow of Unnamed Pond south of Long Pond RTWQ station

### Specific Conductivity

Conductivity levels ranged between 135.96  $\mu\text{S}/\text{cm}$  and 364.3  $\mu\text{S}/\text{cm}$ , with an average of 284.3  $\mu\text{S}/\text{cm}$  during the deployment period.

Variations in water level, as depicted in the graph below, notably influence conductivity data. This is evident as conductivity rises and falls throughout the deployment period (Figure 11). When the water stage rises, often in response to precipitation events, conductivity tends to decrease as the water body is diluted. However, it generally returns to normal levels within a few days to weeks.

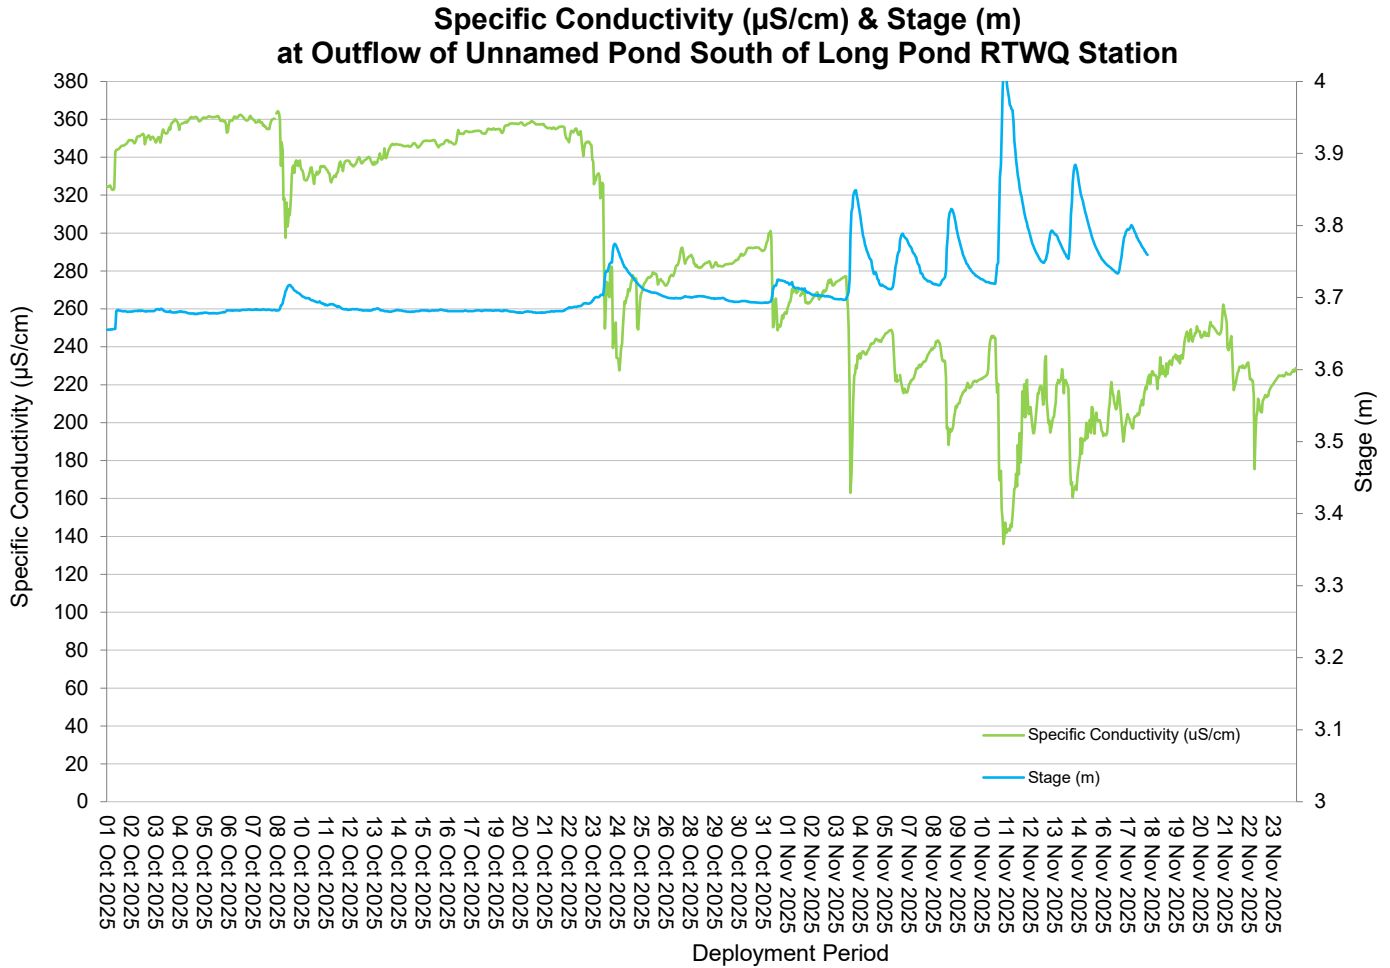


Figure 11: Specific conductivity ( $\mu\text{S}/\text{cm}$ ) at Outflow of Unnamed Pond south of Long Pond RTWQ station

### Dissolved Oxygen

During this deployment, dissolved oxygen concentrations ranged from 9.66 mg/L to 14.22 mg/L, with corresponding percent saturation values between 94.5% and 107.4%. Dissolved oxygen concentration levels remained above the CCME Guideline for the Protection of Aquatic Life for early and other life stages due to the cold water temperatures.

Dissolved oxygen concentrations demonstrate an inverse relationship with water temperature, as depicted in the figure below. When water temperature decreases, dissolved oxygen typically increases (Figure 12).

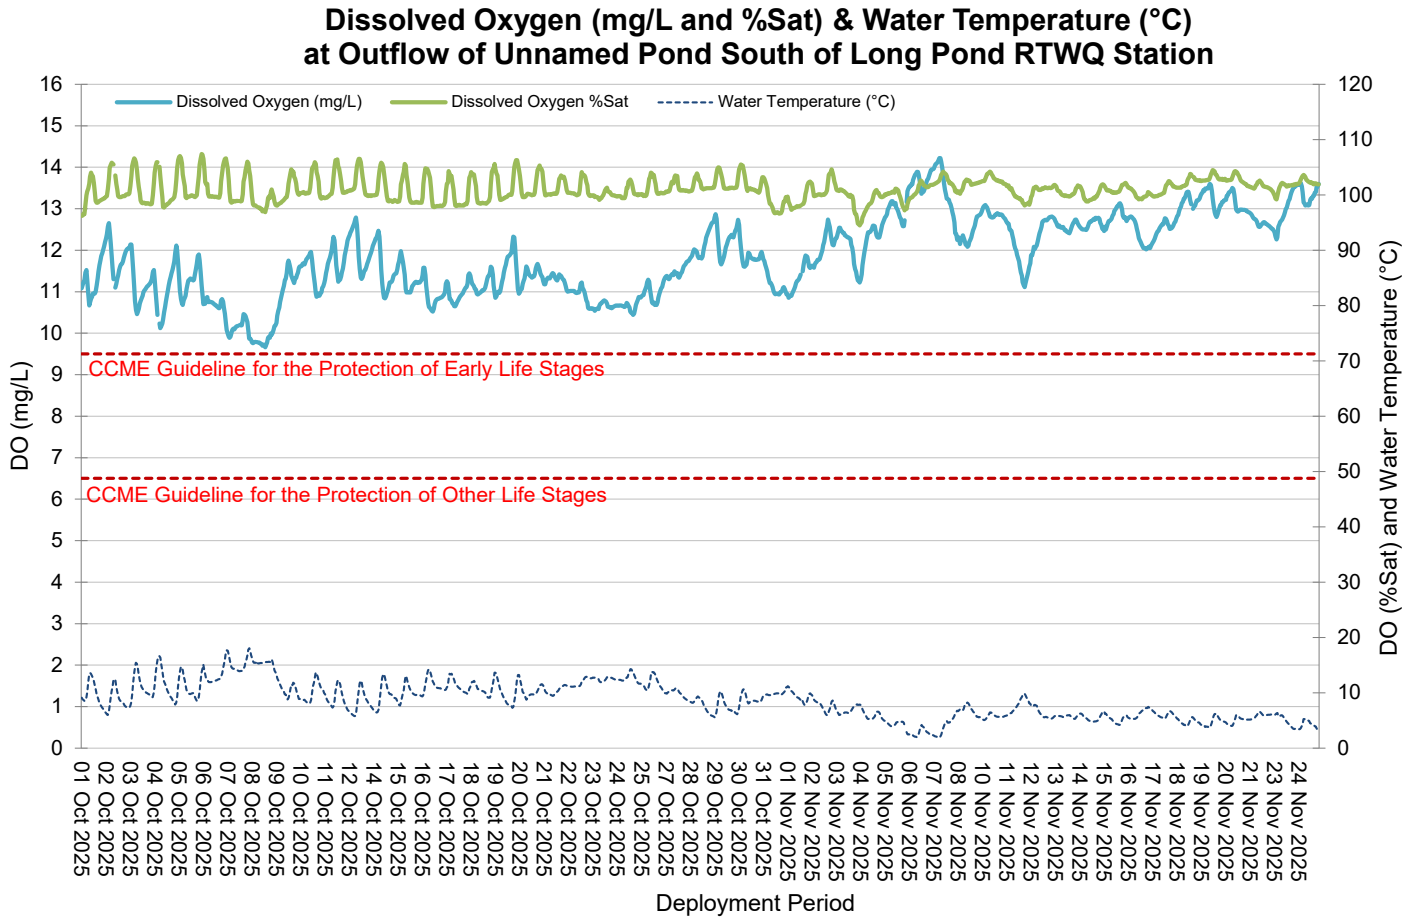


Figure 12: Dissolved Oxygen (%Sat & mg/L) at Outflow of Unnamed Pond south of Long Pond RTWQ station

### Turbidity

Turbidity levels during the deployment ranged within 0.1 NTU and 45.5 NTU, with an average of 2.17 NTU (Figure 13)

The turbidity levels remained low throughout the deployment period with the exception of what appears to be the buildup of sediment around the sensor November 5<sup>th</sup>- 14<sup>th</sup>. Minor fluctuations in the data can be linked to rises in water level caused by precipitation events (Appendix I).

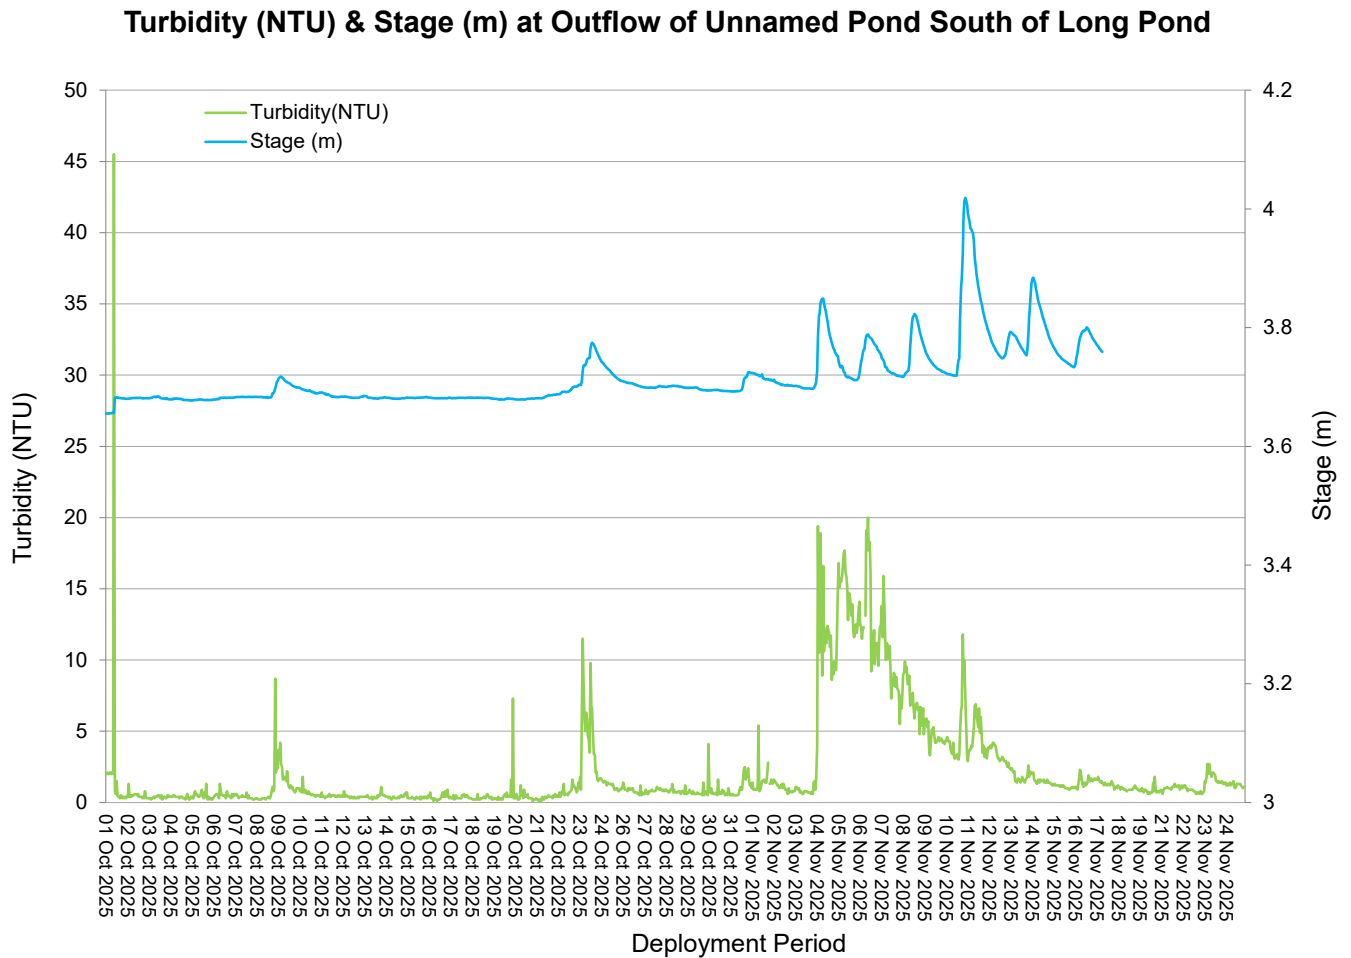


Figure 13: Turbidity (NTU) at Outflow of Unnamed Pond south of Long Pond RTWQ station

### Stage Level and Precipitation

Stage is an estimation of water level at the station and can explain fluctuations occurring with other parameters (i.e. Specific Conductivity, DO, turbidity). Stage ranged between 3.65m to 4.01m during the deployment. Large peaks in stage correspond with the total precipitation events as noted on Figure 14.

Total Precipitation data was obtained from Environment Canada’s St. Lawrence weather station. Throughout the deployment period, precipitation ranged from 0.0mm to the highest total of 17.9mm on November 11, 2025.

*Water Resources Management Division hydrometric data is quality controlled on a less frequent basis than water quality data due to differences in protocols. The hydrometric data shown in this report is provisional and has not undergone quality control checks.*

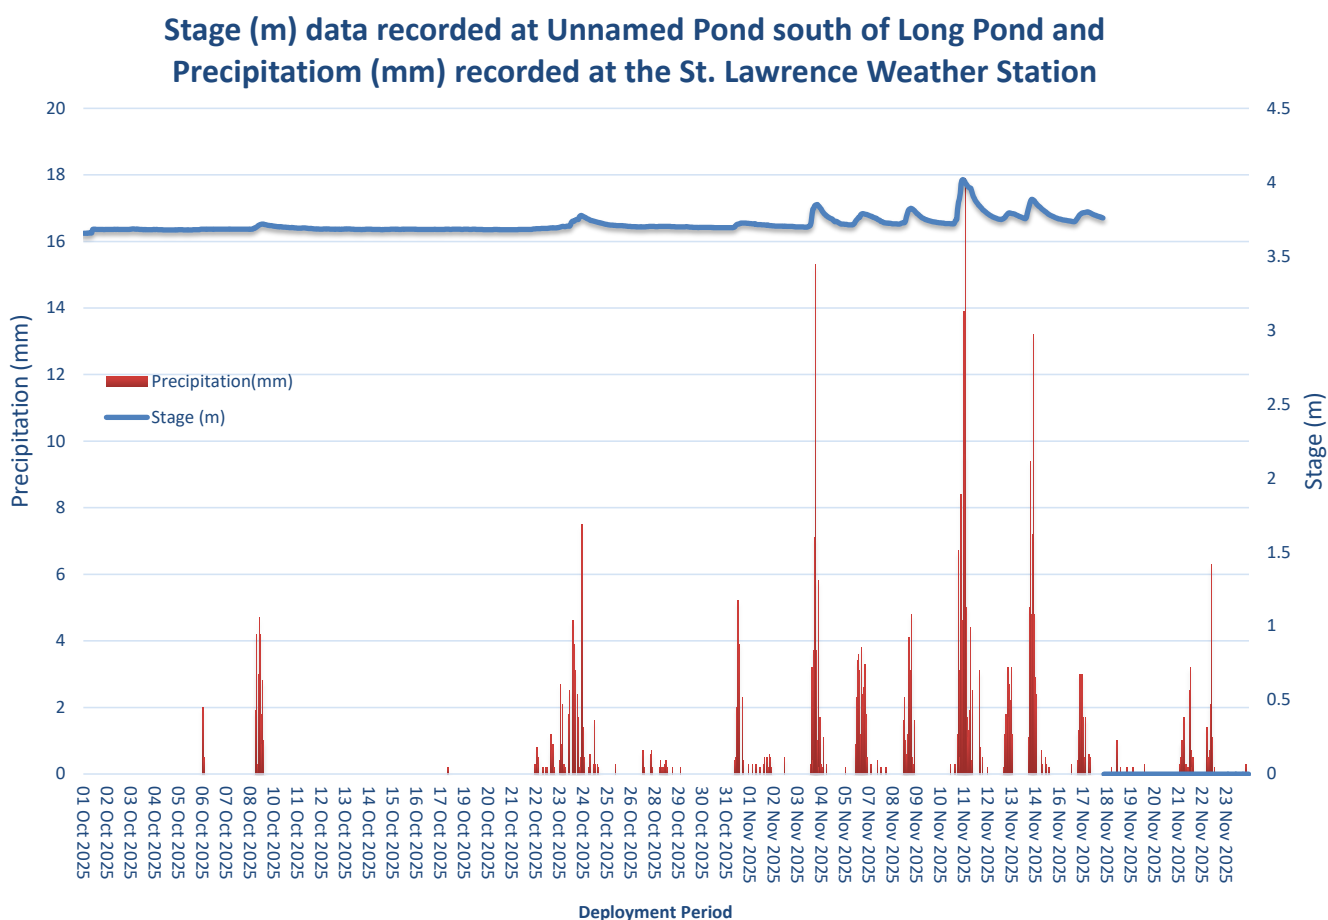


Figure 14: Stage and precipitation data.

APPENDIX I

Total Precipitation recorded at Environment Canada, St. Lawrence Weather Station

Parameter statistics for each RTWQ Station

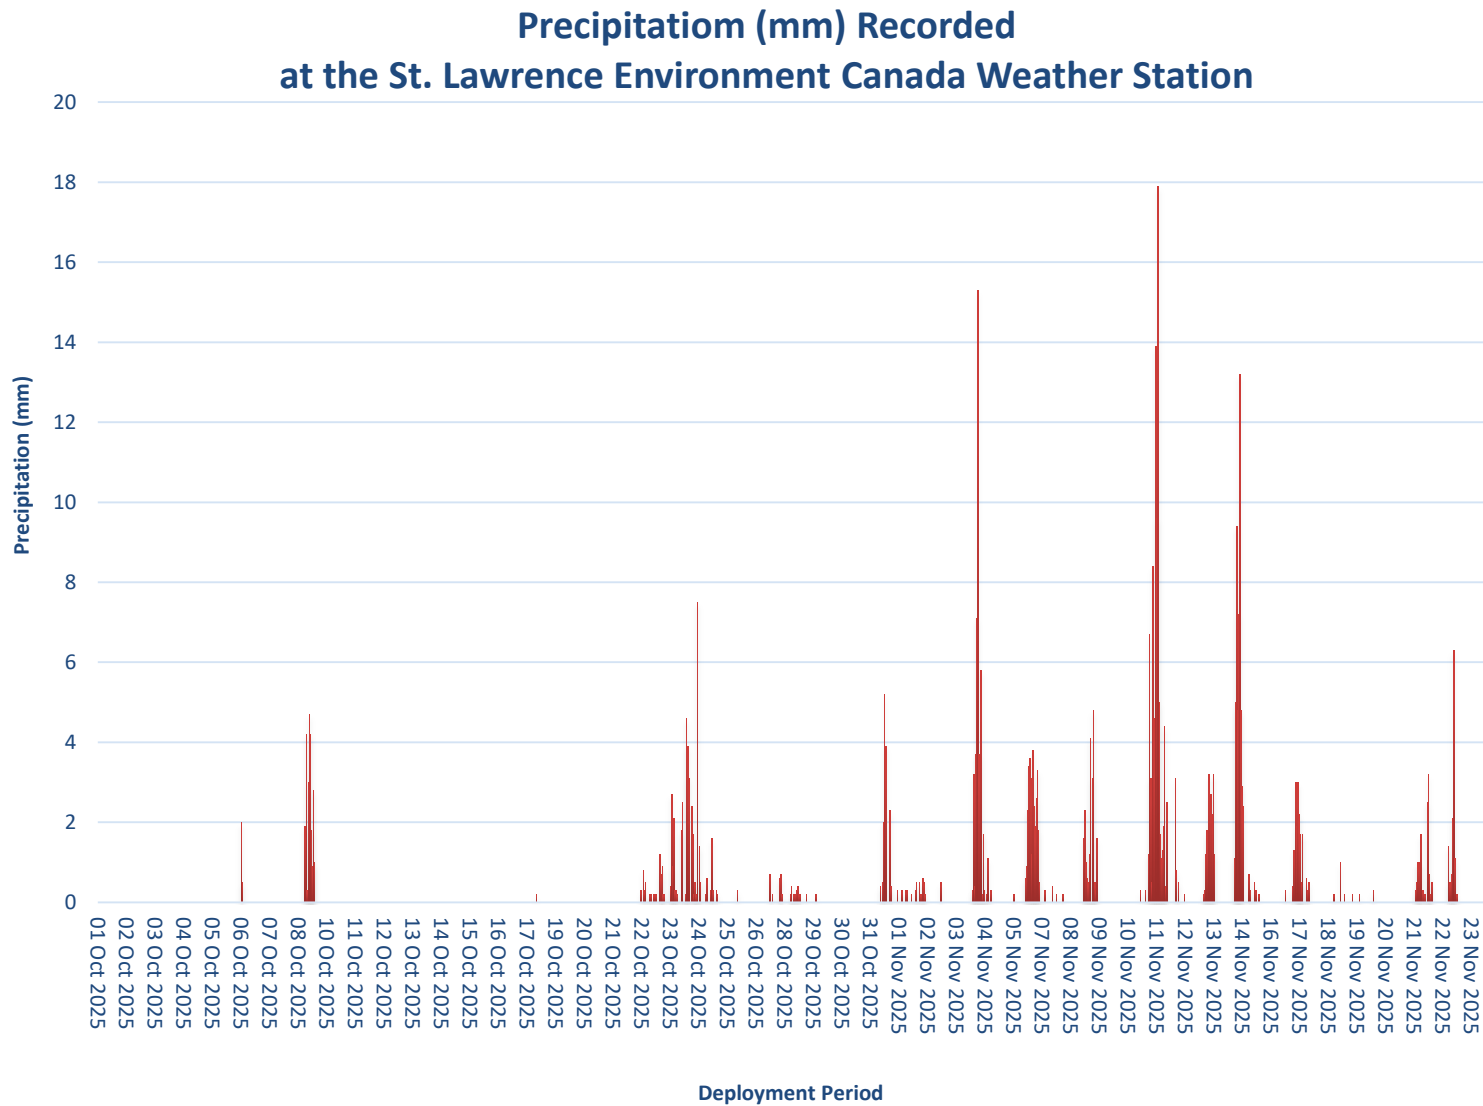


Figure 15: Total Precipitation recorded at the St. Lawrence Environment Canada Weather Station.

**Deployment Period Parameter Statistics for CFI RTWQ Stations**

Deployment period: October 1<sup>st</sup>, 2025 to November 25<sup>th</sup>, 2025

**John Fitzpatrick Pond RTWQ Station**

Parameter	Max.	Min.	Median	Mean
Temperature(°C)	14.67	4.55	10.24	9.3
pH	8.9	7.6	8.3	8.2
Specific Conductivity (µS/cm)	251.37	143.82	224.03	220.2
TDS (g/mL)	0.16	0.09	0.15	0.1
Dissolved Oxygen (%Sat)	111.1	94.8	100.3	100.7
Dissolved Oxygen (mg/L)	12.92	10.1	11.36	11.6
Turbidity (NTU)	0.16	0.09	0.1	1.2
Stage (m)	4.93	4.66	4.76	4.8

**Outflow of Unnamed Pond South of Long Pond RTWQ Station**

Parameter	Max.	Min.	Median	Mean
Temperature(°C)	18.08	1.88	8.45	8.56
pH	8.15	6.96	7.87	7.82
Specific Conductivity (µS/cm)	364.3	135.96	281.62	284.3
TDS (g/mL)	0.24	0.09	0.18	0.184
Dissolved Oxygen (%Sat)	107.4	94.5	100.8	101.02
Dissolved Oxygen (mg/L)	14.22	9.66	11.78	11.85
Turbidity (NTU)	45.5	0.1	0.9	2.17
Stage (m)	0.24	3.65	3.69	3.71
Flow	-	-	-	-