REGISTRATION PURSUANT TO SECTION 49 OF <u>THE ENVIRONMENTAL PROTECTION ACT</u>

NAME OF UNDERTAKING:		PETERS RIVER CRANBERRY FARM Development
PROPONENT:		
(i)	Name of Corporate Body:	Peters River Cranberry (TBI)
(ii)	Address:	72 Grenfell Heights Grand Falls-Windsor, NL A2A 1W5
(iii)	Chief Executive Officer:	Mr. Sean Dyke 72 Grenfell Heights Grand Falls-Windsor, NL A2A 1W5 709-489-9037
(iv)	Principal Contact:	Mr. Sean Dyke 72 Grenfell Heights Grand Falls-Windsor, NL A2A 1W5 709-489-9037 email: seandyke@warp.nfld.net

The Undertaking:

Sean Dyke of Grand Falls-Windsor, Newfoundland and Labrador is presently seeking a License to Occupy from the Lands Division, Department of Environment and Conservation to develop and operate a Cranberry Farm in the Wooddale area.

Description of the Undertaking:

(i) Geographical Location:

A large peat bog located in the Wooddale area, in an area just past the end of the Wooddale South Road. Please see the attached location maps. The total size of the site is approximately 250 acres.

(ii) Physical Features:

The site is comprised of a deep domed peat bog. The site is bounded by Peters River to the North, and by Crown Land in each other direction. The bog is broken into two sections with a low area in between that can be utilized for water structure development. It is primarily dry throughout the applied area, with a few small flashetts on the lower section of the bog. One to two storage sheds are proposed for the site. Access to the site will be developed utilizing an existing forest access road off of the Wooddale South Road.

(iii) Construction:

Subject to final design engineering and consultation. Project development is proposed to begin on the upper section of the bog, with the lower section reserved for future expansion. Work will be carried out over four to five years with a total of up to 36.4 acres of cranberry field beds being developed on the upper section, at a rate of at least 5-10 acres per annum. Fields will be developed at a consistent width of 46 m, with a length based on site layout and topography varying from 539 m to 749 m. The lower section has the potential to add an additional 59.4 acres of cranberry fields, for a total site potential of close to 96 acres. A minimum buffer of 50 m will be maintained from Peters River.

Construction will consist of:

- Preliminary ditching in the proposed berm locations and discharge areas;
- Cranberry bed development, consisting of removing a layer of peat to level the bed, with the spoil to be used for the berm construction;
- Ditching between the bed and berm;
- Construction of Irrigation/Sediment Pond;
- Construction of farm auxiliary buildings;
- Installation of water control structures;
- Installation of drainage tile in the bed;
- Development of an access road to the site, then a farm service road on top of the berms which will be approximately 6m wide and considered part of the berm construction;
- Placement and leveling of approximately 20cm of sand on new cranberry beds.

The potential sources of pollutants during the construction period are associated with machinery diesel fuel and lubricants. Machinery such as farm tractors, excavators, and dump trucks will be refueled and lubricated on mineral soil - off the construction site. Refuse and human waste will be disposed and addressed using procedures specified by the Department of Environment and Conservation.

Year 1 – Start as soon as land, finances and machinery are secured, commencing to develop 6 to 10 acres of cranberry producing fields.

Year 2 – Develop 10 acres of cranberry producing fields.

Year 3+ - Develop 10 acres of cranberry producing fields.

(iv) Operations:

Long term management of a producing cranberry farm with a goal of being a model steward to the environment. No resource conflicts are expected throughout the life of this development.

Harvesting normally consists of flooding each field with approximately 45cm of water, independently at different times, to reduce large volumes of discharge. A cranberry beater will dislodge the cranberries from the vines underwater which will in turn float to the surface, then gathered by a boom and loaded into plastic containers via a conveyor system.

Flood water discharge will be diverted into another field for harvesting or through maintained ditches and routed to a sediment pond, which will contain any potential contaminants, and act as a supplementary water source if required.

Agricultural operational procedures will be consistent with appropriate environmental standards for sustainable agriculture.

Potential contaminants during the operational period will include: Common chemicals used during cranberry operations within Newfoundland and Labrador includes the following registered products:

- Herbicides; Devrinol, Callisto, Roundup
- Insecticides; Sevin, Diazinon
- Fungicides; Bravo, Furban
- Fertilizers; 17-17-17/50lbs/acre, 46-0-0/10lbs/acre

Other potential sources of pollutants during operations include the same as the construction period associated with machinery fuel and lubricants. Machinery such as farm tractors and flat bed trucks will be refueled and lubricated on mineral soil - off the construction site. Refuse and human waste will be disposed and addressed using procedures specified by the Department of Environment and Conservation.

(v) Occupations:

- 1. General Manager
- 2. Design Engineer (Contractor)
- 3. Grower
- 4. Pesticide Applicator
- 5. Laborers (Part time)
- 6. Office administrator
- 7. Equipment operator
- 8. Electrician (Contractor)
- 9. Mechanic (Contractor)
- (vi) Project Related Documents:

Crown Land Application, in progress

Approval of the Undertaking:

Following is a list of main permits, licenses and approvals required for this project.

Approval/Certification/License/Permit

Environmental Registration Dept. of Environment and Conservation Environmental Assessment Approval Dept. of Environment and Conservation Crown Land Dept. of Environment and Conservation Fuel Storage & Handling. Department of Government Services Pesticides (applicator/Operator) Dept. of Environment and Conservation Water Use License Dept. of Environment and Conservation Dept. of Environment and Conservation Permit to Alter a Body of Water Workers Health and Safety Compensation Workplace Health Safety and Compensation Commission

Authority

Schedule:


The earliest construction start date is July 2009, latest being September 2009. Construction will then be conducted over several years.


Funding:


No application for funding at this time. Typical cost of cranberry bed development is approximately \$30,000-35,000/acre.

Sean Dyke (Owner/Operator)

Date

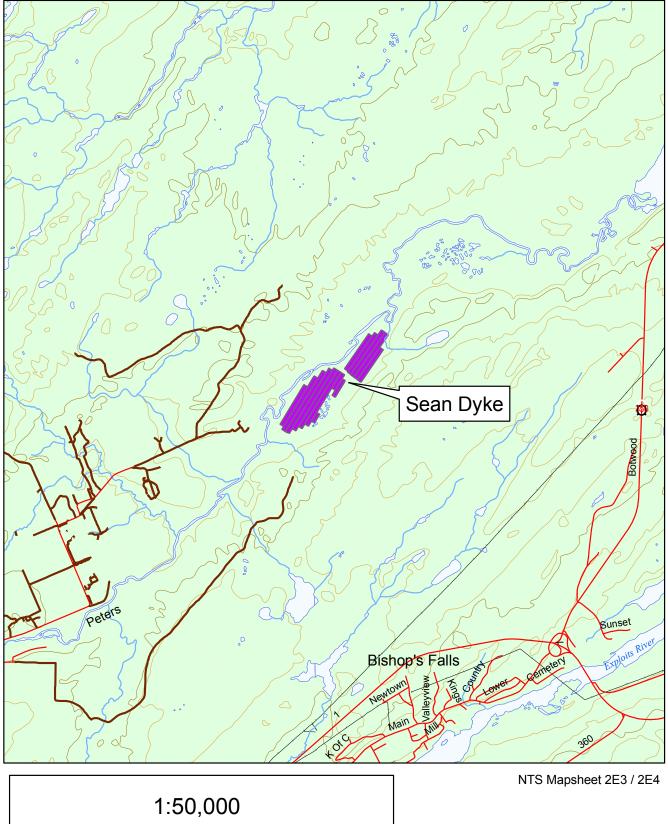



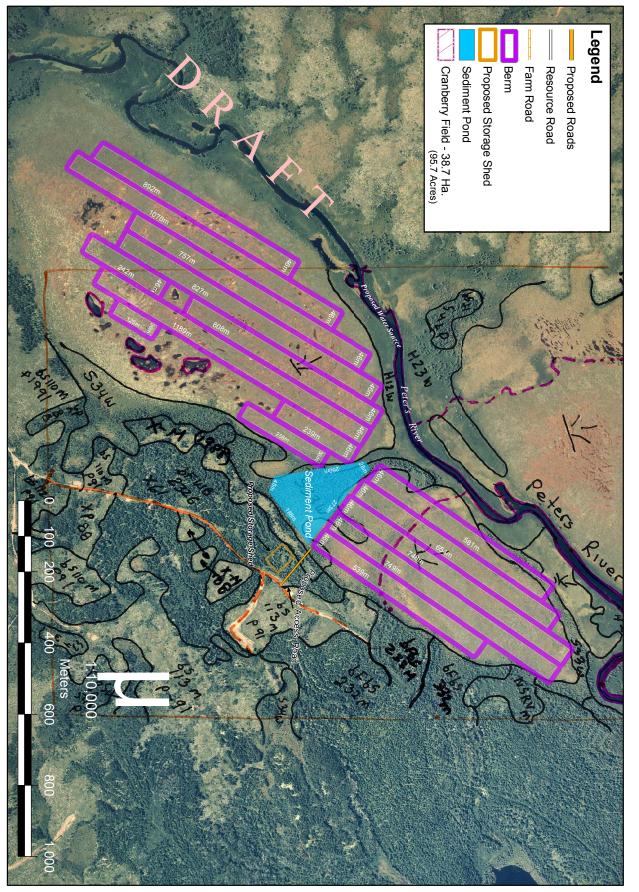

Sean Dyke Cranberries