

PERMIT TO CONSTRUCT

Pursuant to the *Water Resources Act*, SNL 2002 cW-4.01, specifically Section(s) 37

Date: **NOVEMBER 26, 2015**

File No: 843.114.1
Permit No: WS8396-2015


Permit Holder: **Town of Botwood
PO Box 490
Botwood NL A0H 1E0**


Attention: **Mr. Stephen Jerrett**

Re: **Botwood - Reservoir Control and Pressure Reducing Stations**

Permission is hereby given for : the installation of a reservoir level control station, relocation of existing pressure reducing chamber and related appurtenances as described in a specification and drawings titled, "Town of Northern Arm Watermain Extension Contract No. 2" as received from CEGON Limited on October 30, 2015.

- This Permit does not release the Permit Holder from the obligation to obtain appropriate approvals from other concerned municipal, provincial and federal agencies.
- The Permit Holder must obtain the approval of the Crown Lands Administration Division if the project is being carried out on Crown Land.
- This Permit is subject to the terms and conditions indicated in Appendices A and B (attached).
- It should be noted that prior to any significant changes in the design or installation of the proposed works, or in event of changes in ownership or management of the project, an amendment to this Permit must be obtained from the Department of Environment and Conservation under Section 49 of the *Water Resources Act*.
- Failure to comply with the terms and conditions will render this Permit null and void, place the Permit Holder and their agent(s) in violation of the *Water Resources Act* and make the Permit Holder responsible for taking any remedial measures as may be prescribed by this Department.

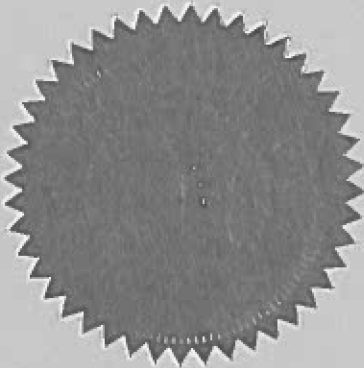


MINISTER

APPENDIX A
Terms and Conditions for Permit

Water & Sewer General

1. Water pumped from excavations or work areas, or any runoff or effluent directed out of work sites, must have silt and turbidity removed by settling ponds, filtration, or other suitable treatment before discharging to a body of water. Effluent discharged into receiving waters must comply with the *Environmental Control Water and Sewage Regulations, 2003*.
2. All operations must be carried out in a manner that prevents damage to land, vegetation, and watercourses, and which prevents pollution of bodies of water.
3. Any areas adversely affected by this project must be restored to a state that resembles local natural conditions. Further remedial measures to mitigate environmental impacts on water resources can and will be specified, if considered necessary in the opinion of the Department.
4. All waste materials resulting from this project must be disposed of at a site approved by the Department of Service NL.
5. The works proposed must satisfy the requirements of the latest applicable codes and standards, and be consistent with or otherwise address the design criteria set out in the Department of Environment and Conservation publication *Guidelines for The Design, Construction, and Operation of Water and Sewerage Systems, 2005*, and as amended from time to time.
6. The work must be undertaken in strict compliance with the submitted documents and the latest version of the *Municipal Water, Sewer and Roads Master Construction Specifications*. A copy of all documents, including the *Municipal Water, Sewer and Roads Master Construction Specifications* must be available for viewing at the construction site office at all times.
7. Liaison is to be maintained with the Design Approval Specialist representing the Community Water and Wastewater Section of this Department, during the construction and operation of the project. The Specialist shall be notified of the pre-construction and post-construction meetings so that she may attend, if deemed necessary. She can be reached at telephone (709) 729-2558.
8. Officials of this Department may visit the project from time to time to ensure that work is carried out within the provisions of this Permit, and is not creating any environmental hazard.
9. Any changes in the approved works, or works other than those specified in the application, must be submitted, in writing, to this Department, and approved, in the form of an Amendment to this Permit, prior to any work.
10. Copies of this Permit, as well as any subsequent Amendments, must be provided to the contractor(s) who will be carrying out these works, and to the engineer's site representative.
11. The attached Completion Report (Appendix C) for Permit No. 8396 must be completed and returned to this Department upon completion of the approved works. Pictures must be submitted along with the completion report, showing the project site prior to and after development.
12. This Permit is valid for two years from the date of issue. Work must be completed by that date or the application and approval procedure must be repeated.
13. The drinking water system shall be operated and maintained in accordance with the Permit to Operate issued by this Department.
14. Management of stormwater is the responsibility of the municipality or LSD. Stormwater management should focus on ensuring that the post-development stormwater runoff rate will be equal to or less than the pre-development runoff rate. Any stormwater runoff has the potential to contribute to flooding downstream which may have liability issues for the municipality or LSD if not managed properly.
15. The Owner must update any drawings maintained of the drinking water system to reflect the modification or replacement of the works, where applicable.

Water Systems

16. Under no circumstances shall sewage be permitted to enter the waterline trench during or after construction.

17. All new waterlines and appurtenances shall be hydrostatically tested in accordance with the *Municipal Water, Sewer and Roads Specifications*.
18. All components, lubricants and chemicals provided shall be compatible for use with drinking water and shall meet the requirements of ANSI/NSF 60 Drinking Water Treatment Chemical Standard and ANSI/NSF 61 Drinking Water and System Component Standard and any other standard applicable to potable water.
19. All new lines and appurtenances must be disinfected by an approved method described in the latest edition of the AWWA C651 Standard for Disinfecting Watermains and using only chlorine products that meet the NSF 60 standard.
20. For the purpose of disinfecting new or upgraded watermains, connection may only be made to the existing watermain provided a valve is installed that maintains a water tight seal. This valve may be operated to flush the new water extension before disinfection and post disinfection provided adequate measures and procedures are followed to avoid a backflow and contamination of the existing system.
21. Drain lines from air release/vacuum valves shall not discharge at the bottom of the chamber next to the floor drain unless there is an air gap on the line to prevent any possibility of backsiphonage of chamber water back into the potable water system. The air gap shall be located at a location on the line just above the crown of the watermain. If an air gap is not possible in this area, the drain line shall be shortened so it discharges higher than the crown of the watermain.
22. The existing watermain that is being taken out of service must be permanently disconnected so as not to create a cross-connection with the town's water distribution system.

Miscellaneous

23. The Permit Holder must prevent erosion of drainage ditches, streams or other natural bodies of water by installing rip-rap and/or sodding.
24. All drains and vents shall be equipped with screens to prevent the entry of insects, birds and rodents.
25. The ends of drains and overflows shall be located so as to prevent erosion. Where necessary, concrete or similar splash plates shall be located below the end of the overflow, and the immediate surrounding area shall be filled to a depth of 10 cm with 19 mm minus stone to prevent ponding.

APPENDIX B
Special Terms and Conditions for Permit

1. The Permit Holder and its agent(s), subcontractor(s), and consultant(s) shall keep all systems and works in good condition and repair and in accordance with all laws, by-laws, directions, rules and regulations of any governmental authority. The Permit Holder or its agent(s), subcontractor(s), or consultant(s) shall immediately notify the Minister if any problem arises which may threaten the structural stability of the systems and works, endanger public safety and/or the environment or adversely affect others and/or any body of water either in or outside the said Project areas. The Permit Holder and its agent(s), subcontractor(s), and consultant(s) shall be responsible for all damages suffered by the Minister and Government resulting from any defect in the systems and works, operational deficiencies/inadequacies, or structural failure.
2. The Permit Holder and its agent(s), subcontractor(s), and consultant(s) shall operate the said Project and its systems and works in a manner which does not cause any water related and/or environmental problems, including but not limited to problems of erosion, deposition, flooding, and deterioration of water quality and groundwater depletion, in or outside the said Project areas. The Permit Holder and its agent(s), subcontractor(s), and consultant(s) shall be responsible for any and all damages associated with these problems caused as a result of changes, deficiencies, and inadequacies in the operational procedures by the Permit Holder or its agent(s), subcontractor(s), or consultant(s).
3. If the Permit Holder or its agent(s), subcontractor(s), or consultant(s) fails to perform, fulfil, or observe any of the terms and conditions, or provisions of this Permit and/or Ministerial orders and guidelines, as determined by this Department, the Minister may, after providing ten (10) day notice to the Permit Holder, amend, modify, suspend or cancel this Permit in accordance with the *Water Resources Act*.
4. The Permit Holder and its agent(s), subcontractor(s), and consultant(s) indemnify and hold the Minister and Government harmless against any and all liabilities, losses, claims, demands, damages or expenses including legal expenses of any nature whatsoever whether arising in tort, contract, statute, trust or otherwise resulting directly or indirectly from granting this Permit, systems and works in or outside the said Project areas, or any act or omission of the Permit Holder or its agent(s), subcontractor(s), or consultant(s) in or outside the said Project areas, or arising out of a breach or non-performance of any of the terms and conditions, or provisions of this Permit by the Permit Holder or its agent(s), subcontractor(s), or consultant(s).
5. This Permit is subject to all provisions of the *Water Resources Act* and any regulations in effect either at the date of this Permit or hereafter made pursuant thereto or any other relevant legislation enacted by the Province of Newfoundland and Labrador in the future.
6. This Permit shall be construed and interpreted in accordance with the laws of the Province of Newfoundland and Labrador.

cc: Ms. Deneen Spracklin, P.Eng.
Environmental Engineer, Community Water and Wastewater
Water Resources Management
Environment and Conservation
PO Box 8700
St. John's NL A1B 4J6

cc: Mr. James Harty, P.Eng
Municipal Engineering Services
Department of Municipal and Intergovernmental Affairs
PO Box 2222
Gander NL A1V 2N9

cc: Mr. Wayne Lynch
Regional Director (Central)
Service NL
PO Box 2222
Gander NL A1V 2N9

cc: Mr. Barry Thomson, P.Eng.
Cecon Limited
93 Edinburgh Avenue
Gander NL A1V 1C9

Appendix C - Completion Report

Pursuant to the *Water Resources Act*, SNL 2002 cW-4.01, specifically Section(s) 37

Date: **NOVEMBER 26, 2015**

File No: **843.114.1**

Permit No: **WS8396-2015**

Permit Holder: **Town of Botwood
PO Box 490
Botwood NL A0H 1E0**

Attention: **Mr. Stephen Jerrett**

Re: **Botwood - Reservoir Control and Pressure Reducing Stations**

Permission was given for : the installation of a reservoir level control station, relocation of existing pressure reducing chamber and related appurtenances as described in a specification and drawings titled, "Town of Northern Arm Watermain Extension Contract No. 2" as received from CECON Limited on October 30, 2015.

I (the Permit Holder named above or agent authorized to represent the Permit Holder) do hereby certify that the project described above was completed in accordance with the plans and specifications submitted to the Department of Environment and Conservation and that the work was carried out in strict compliance with the terms and conditions of the Permit issued for this project.

Date: _____

Signature: _____

This completion report must be completed and forwarded to the following address upon completion of the approved work.

Department of Environment and Conservation
Water Resources Management Division
PO Box 8700
St. John's NL A1B 4J6