

PERMIT TO CONSTRUCT

Pursuant to the *Water Resources Act*, SNL 2002 cW-4.01, specifically Section(s) 37, 48

Date: **AUGUST 22, 2017**

File No: **842.006.1**
Permit No: **WS9299-2017**


Permit Holder: **Town of Woody Point
Po Box 100
Woody Point NL A0K 1P0**

Attention: **Ms. Jacqueline Blanchard**

Re: **Woody Point - Chlorination Upgrades**

Permission is hereby given for : upgrades to the existing chlorination/pumphouse building including all civil, mechanical and electrical works, 6 m of 300 mm diameter DI watermain, 6 m of 150 mm diameter DI watermain and related works and appurtenances as described in a specification entitled "Town of Woody Point, Chlorination Building Upgrades" as well as a set of nine drawings as received from SNC Lavalin on June 22, 2017 and additional information received on August 18, 2017.

- This Permit does not release the Permit Holder from the obligation to obtain appropriate approvals from other concerned municipal, provincial and federal agencies.
- The Permit Holder must obtain the approval of the Crown Lands Administration Division if the project is being carried out on Crown Land.
- This Permit is subject to the terms and conditions indicated in Appendices A and B (attached).
- It should be noted that prior to any significant changes in the design or installation of the proposed works, or in event of changes in ownership or management of the project, an amendment to this Permit must be obtained from the Department of Municipal Affairs and Environment under Section 49 of the *Water Resources Act*.
- Failure to comply with the terms and conditions will render this Permit null and void, place the Permit Holder and their agent(s) in violation of the *Water Resources Act* and make the Permit Holder responsible for taking any remedial measures as may be prescribed by this Department.

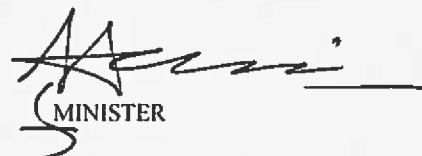

MINISTER

APPENDIX A
Terms and Conditions for Permit

Water & Sewer General

1. Water pumped from excavations or work areas, or any runoff or effluent directed out of work sites, must have silt and turbidity removed by settling ponds, filtration, or other suitable treatment before discharging to a body of water. Effluent discharged into receiving waters must comply with the *Environmental Control Water and Sewage Regulations, 2003*.
2. All operations must be carried out in a manner that prevents damage to land, vegetation, and watercourses, and which prevents pollution of bodies of water.
3. Any areas adversely affected by this project must be restored to a state that resembles local natural conditions. Further remedial measures to mitigate environmental impacts on water resources can and will be specified, if considered necessary in the opinion of this Department.
4. All waste materials resulting from this project must be disposed of at a site approved by the Department of Service NL.
5. The works proposed must satisfy the requirements of the latest applicable codes and standards, and be consistent with or otherwise address the design criteria set out in the Department of Municipal Affairs and Environment publication *Guidelines for The Design, Construction, and Operation of Water and Sewerage Systems, 2005*, and as amended from time to time.
6. The work must be undertaken in strict compliance with the submitted documents and the latest version of the *Municipal Water, Sewer and Roads Master Construction Specifications*. A copy of all documents, including the *Municipal Water, Sewer and Roads Master Construction Specifications* must be available for viewing at the construction site office at all times.
7. Liaison is to be maintained with the Environmental Scientist representing the Drinking Water and Wastewater Section of this Department, during the construction and operation of the project. They shall be notified of the pre-construction and post-construction meetings so that they may attend, if deemed necessary. They can be reached at telephone (709) 637-2034.
8. Officials of this Department may visit the project from time to time to ensure that work is carried out within the provisions of this Permit, and is not creating any environmental hazard.
9. Any changes in the approved works, or works other than those specified in the application, must be submitted, in writing, to this Department, and approved, in the form of an Amendment to this Permit, prior to any work.
10. Copies of this Permit, as well as any subsequent Amendments, must be provided to the contractor(s) who will be carrying out these works, and to the engineer's site representative.
11. The attached Completion Report (Appendix C) for Permit No. 9299 must be completed and returned to this Department upon completion of the approved works. Pictures must be submitted along with the completion report, showing the project site prior to and after development.
12. This Permit is valid for two years from the date of issue. Work must be completed by that date or the application and approval procedure must be repeated.
13. The drinking water system shall be operated and maintained in accordance with the Permit to Operate issued by this Department.
14. The Owner must update any drawings maintained of the drinking water system to reflect the modification or replacement of the works, where applicable.

Water Systems

15. All new waterlines and appurtenances shall be hydrostatically tested in accordance with the *Municipal Water, Sewer and Roads Specifications*.
16. All components, lubricants and chemicals provided shall be compatible for use with drinking water and shall meet the requirements of ANSI/NSF 60 Drinking Water Treatment Chemical Standard and ANSI/NSF 61 Drinking Water and System Component Standard and any other standard applicable to potable water.

17. All new lines and appurtenances must be disinfected by an approved method described in the latest edition of the AWWA C651 Standard for Disinfecting Watermains and using only chlorine products that meet the NSF 60 standard.

Chlorination

18. A backflow prevention device, in this case a hose connection vacuum breaker, non removable, meeting or exceeding CSA 64.2, shall be attached to any hose hobb connection, to prevent the possibility of contaminants entering the potable water distribution system due to back-siphonage.
19. The upgrading of the existing chlorination facility must be carried out in such a way as there will be minimal interruption of the water supply and chlorination system. In this regard, water consumers and the Regional Office of Service NL shall be kept informed and appropriate action taken to address any potential or encountered problems.
20. A sample tap shall be provided so that water samples can be obtained from the raw water source and from an appropriate location after chlorination. Taps used shall be of the smooth-nosed type without interior or exterior threads and shall not have a screen, aerator or other such appurtenance.
21. An emergency shower and eye wash station that is in compliance with ANSI Z358.1-2014 and meets the requirements of the appropriate Materials Safety Data Sheet (MSDS) shall be installed in a convenient location(s) within each facility.
22. The sodium hypochlorite shall be stored in a dark cool area to minimize loss of strength of the solution. In this regard a storage cabinet should be provided and shall be located away from any direct heat and light sources.
23. Personal protective equipment such as goggles and rubber gloves suitable for handling sodium hypochlorite must be provided.
24. Portable equipment must be provided for measuring chlorine residuals. The equipment shall have digital display readout, enable measurement of chlorine residuals to the nearest 0.02 mg/L, and shall be of a type approved by this Department.

General Alterations

25. Any work that must be performed below the high water mark must be carried out during a period of low water levels.
26. Any flowing or standing water must be diverted around work sites so that work is carried out in the dry.
27. The use of heavy equipment in streams or bodies of water is not permitted. The operation of heavy equipment must be confined to dry stable areas.
28. All vehicles and equipment must be clean and in good repair, free of mud and oil, or other harmful substances that could impair water quality.
29. During the construction of concrete components, formwork must be properly constructed to prevent any fresh concrete from entering a body of water. Dumping of concrete or washing of tools and equipment in any body of water is prohibited.
30. Wood preservatives such as penta, CCA or other such chemicals must not be applied to timber near a body of water. All treated wood or timber must be thoroughly dry before being brought to any work site and installed.
31. The bed, banks and floodplains of watercourses, or other vulnerable areas affected by this project, must be adequately protected from erosion by seeding, sodding or placing of rip-rap.
32. Sediment and erosion control measures must be installed before starting work. All control measures must be inspected regularly and any necessary repairs made if damage is discovered.
33. Fill material must be of good quality, free of fines or other substances including metals, organics, or chemicals that may be harmful to the receiving waters.

Miscellaneous

34. The Permit Holder must prevent erosion of drainage ditches, streams or other natural bodies of water by installing rip-rap and/or sodding.
35. Council is advised to apply to the Water Resource Management Division of this Department, for protection of the watershed area.

APPENDIX B
Special Terms and Conditions for Permit

1. The Permit Holder and its agent(s), subcontractor(s), and consultant(s) shall keep all systems and works in good condition and repair and in accordance with all laws, by-laws, directions, rules and regulations of any governmental authority. The Permit Holder or its agent(s), subcontractor(s), or consultant(s) shall immediately notify the Minister if any problem arises which may threaten the structural stability of the systems and works, endanger public safety and/or the environment or adversely affect others and/or any body of water either in or outside the said Project areas. The Permit Holder and its agent(s), subcontractor(s), and consultant(s) shall be responsible for all damages suffered by the Minister and Government resulting from any defect in the systems and works, operational deficiencies/inadequacies, or structural failure.
2. The Permit Holder and its agent(s), subcontractor(s), and consultant(s) shall operate the said Project and its systems and works in a manner which does not cause any water related and/or environmental problems, including but not limited to problems of erosion, deposition, flooding, and deterioration of water quality and groundwater depletion, in or outside the said Project areas. The Permit Holder and its agent(s), subcontractor(s), and consultant(s) shall be responsible for any and all damages associated with these problems caused as a result of changes, deficiencies, and inadequacies in the operational procedures by the Permit Holder or its agent(s), subcontractor(s), or consultant(s).
3. If the Permit Holder or its agent(s), subcontractor(s), or consultant(s) fails to perform, fulfil, or observe any of the terms and conditions, or provisions of this Permit and/or Ministerial orders and guidelines, as determined by this Department, the Minister may, after providing ten (10) day notice to the Permit Holder, amend, modify, suspend or cancel this Permit in accordance with the *Water Resources Act*.
4. The Permit Holder and its agent(s), subcontractor(s), and consultant(s) indemnify and hold the Minister and Government harmless against any and all liabilities, losses, claims, demands, damages or expenses including legal expenses of any nature whatsoever whether arising in tort, contract, statute, trust or otherwise resulting directly or indirectly from granting this Permit, systems and works in or outside the said Project areas, or any act or omission of the Permit Holder or its agent(s), subcontractor(s), or consultant(s) in or outside the said Project areas, or arising out of a breach or non-performance of any of the terms and conditions, or provisions of this Permit by the Permit Holder or its agent(s), subcontractor(s), or consultant(s).
5. This Permit is subject to all provisions of the *Water Resources Act* and any regulations in effect either at the date of this Permit or hereafter made pursuant thereto or any other relevant legislation enacted by the Province of Newfoundland and Labrador in the future.
6. This Permit shall be construed and interpreted in accordance with the laws of the Province of Newfoundland and Labrador.

- cc: Mr. Chris Blanchard, B. Tech.(Env), ASCT
Environmental Scientist
Water Resources Management Division
Department of Municipal Affairs and Environment
P.O. Box 2006
Corner Brook, NL, A2H 6J8
cblancha@gov.nl.ca
- cc: Ms. Deneen Spracklin, P.Eng.
Environmental Engineer, Drinking Water and Wastewater Section
Water Resources Management Division
Department of Municipal Affairs and Environment
P.O. Box 8700
4th Floor, West Block, Confederation Building
St. John's, NL, A1B 4J6
dspracklin@gov.nl.ca
- cc: Mr. Chris Power, P. Eng.
Regional Engineer, Western Regional Office
Department of Municipal Affairs and Environment
6th Floor, Sir Richard Squires Building
P.O. Box 2006
Corner Brook, NL, A2H 6J8
ChrisPower@gov.nl.ca
- cc: Ms. Susan Hoddinott
Regional Director
Service NL
PO Box 2006
Corner Brook NL, A2H 6J8
SusanHoddinott@gov.nl.ca
- cc: Mr. Ira Barter
SNC-Lavalin Inc.
Suite 207, Millbrook Mall
2 Herald Avenue
Corner Brook, NL, A2H 4B5
ira.barter@snelavalin.com

Appendix C - Completion Report

Pursuant to the *Water Resources Act*, SNL 2002 cW-4.01, specifically Section(s) 37, 48

Date: **AUGUST 22, 2017**

File No: **842.006.1**

Permit No: **WS9299-2017**

Permit Holder: **Town of Woody Point
Po Box 100
Woody Point NL A0K 1P0**

Attention: **Ms. Jacqueline Blanchard**

Re: **Woody Point - Chlorination Upgrades**

Permission was given for : upgrades to the existing chlorination/pumphouse building including all civil, mechanical and electrical works, 6 m of 300 mm diameter DI watermain, 6 m of 150 mm diameter DI watermain and related works and appurtenances as described in a specification entitled "Town of Woody Point, Chlorination Building Upgrades" as well as a set of nine drawings as received from SNC Lavalin on June 22, 2017 and additional information received on August 18, 2017.

I (the Permit Holder named above or agent authorized to represent the Permit Holder) do hereby certify that the project described above was completed in accordance with the plans and specifications submitted to the Department of Municipal Affairs and Environment and that the work was carried out in strict compliance with the terms and conditions of the Permit issued for this project.

Date: _____

Signature: _____

This completion report must be completed and forwarded to the following address upon completion of the approved work.

Department of Municipal Affairs and Environment
Water Resources Management Division
PO Box 8700
St. John's NL A1B 4J6