



RAU 90

STANDARD WIDTH R.O.W. 60m (2 LANES).
 STANDARD WIDTH CUTTING 60m.
 STANDARD WIDTH GRUBBING 40m.

HYDROSEEDING, WHERE APPLICABLE, TO EXTEND FROM MID-POINT OF SHOULDER ROUNDING.

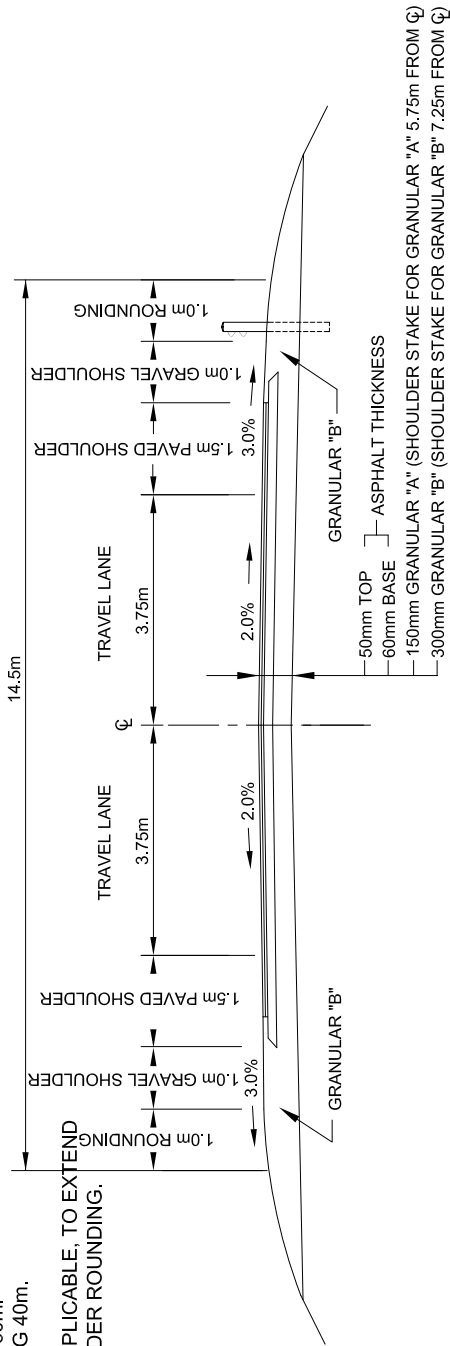

TYPICAL CROSS SECTION FOR RAU 90 FINAL CONSTRUCTION

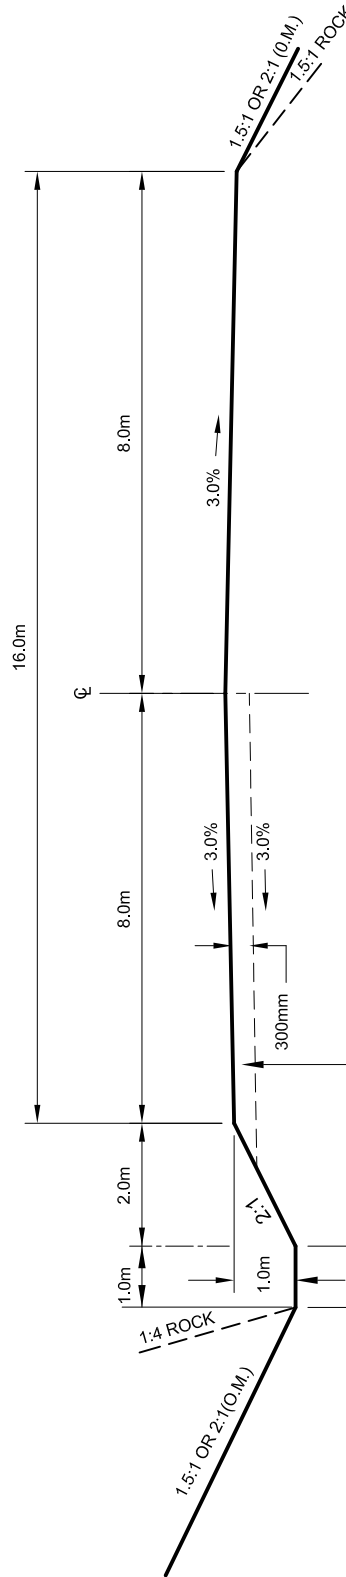

IN ROCK CUTS REMOVE ROCK & REPLACE WITH APPROVED SUITABLE MATERIAL. ENSURE DRAINAGE OF ALL DEPRESSIONS IN ROCK CUTS.

NOTES:
 SHOULDER STAKE 6.75m FOR SHOULDERING MACHINE TO ACHIEVE REQUIRED ROUNDING.

IF SCARIFYING IS REQUIRED WIDTH OF SCARIFYING SHALL BE WIDTH OF PAVEMENT PLUS 300mm ON BOTH SIDES.

IF CLIMBING LANE IS REQUIRED ADD 3.75m TO BOTH CROSS SECTIONS.

TYPICAL CROSS SECTION FOR RAU 90 SUB-GRADE CONSTRUCTION



TRANSPORTATION AND WORKS
 HIGHWAY DESIGN DIVISION

TYPICAL CROSS SECTION RAU 90

DRAWN BY: BMF

DATE: REV March 31, 2012

SCALE 1:100