
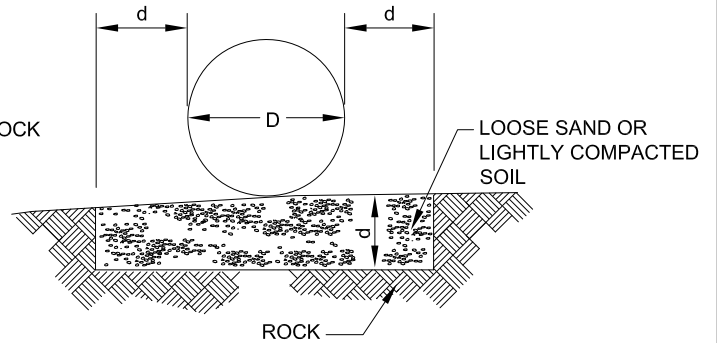


TRANSITIONS OF PIPE FOUNDATIONS FROM COMPRESSIBLE SOILS TO ROCK.
 EXCAVATE ROCK AND COMPRESSIBLE SOIL IN TRANSITION SECTION TO PROVIDE REASONABLY
 UNIFORM LONGITUDINAL PIPE SUPPORT AND MINIMUM DIFFERENTIAL SETTLEMENT.

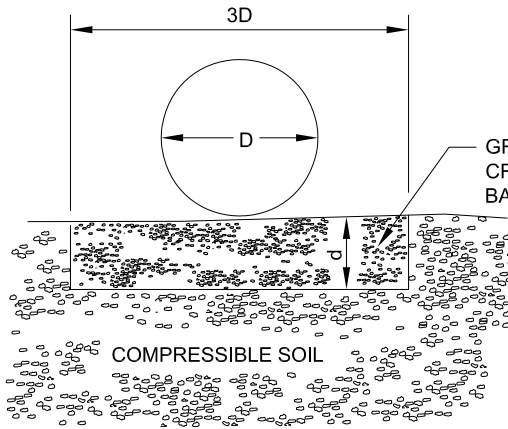

$d = 4\%$ OF FILL OVER PIPE WITH A 200 MINIMUM

SECTION A-A

SECTION B-B

SECTION B-B IS APPLICABLE TO ALL
 CONTINUOUS ROCK FOUNDATIONS.



TRANSPORTATION AND WORKS
 HIGHWAY DESIGN DIVISION

TYPICAL TREATMENT FOR ROCK,
 CULVERT, PIPE OR SEWER FOUNDATIONS

DRAWN BY:

DATE:

REV 02-01-10

NOT TO SCALE