



PLAN VIEW

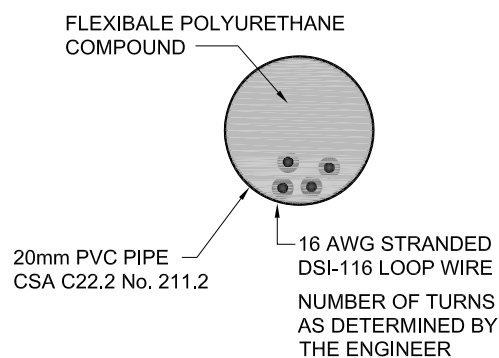

SECTION B-B

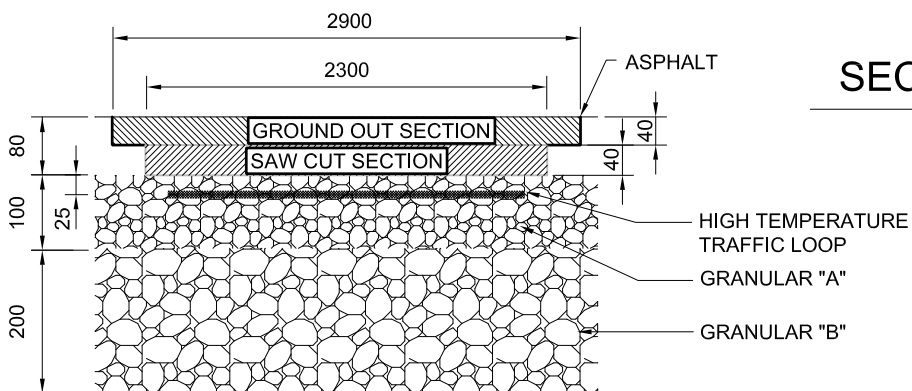

SECTION A-A

**NOTE:**

1. WIRE PAIR FROM JUNCTION BOX TO LOOP TO BE TWISTED 17 TURNS/m.
2. TOP 40mm OF ASPHALT TO BE GROUND OUT AT A WIDTH OF 2900mm.
3. REMAINING 40mm OF ASPHALT TO BE SAW CUT OUT AT A WIDTH OF 2300mm.
3. ASPHALT SHALL BE REINSTATED AS PER SECTION 330 OF SPECIFICATIONS.



TRANSPORTATION AND WORKS  
HIGHWAY DESIGN DIVISION

**TYPE 2 INSTALLATION OF PRE-FORMED  
INDUCTIVE LOOP PLACEMENT IN EXISTING ROAD**

DRAWN BY:

DATE: February 16, 2010

NOT TO SCALE