



**SIDEWALK AT DRIVEWAY ENTRANCE - PLAN**

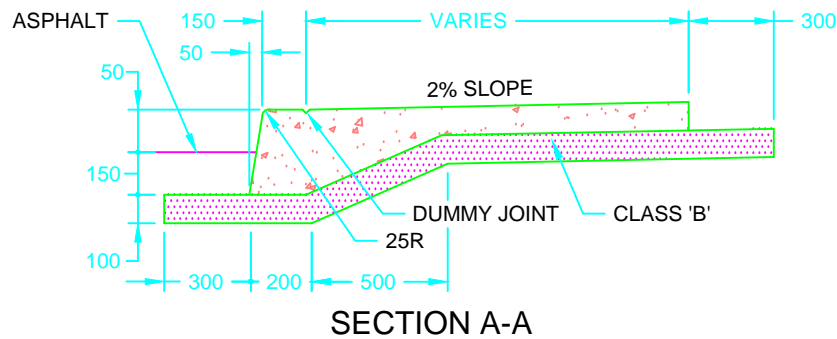


**SECTION A-A**

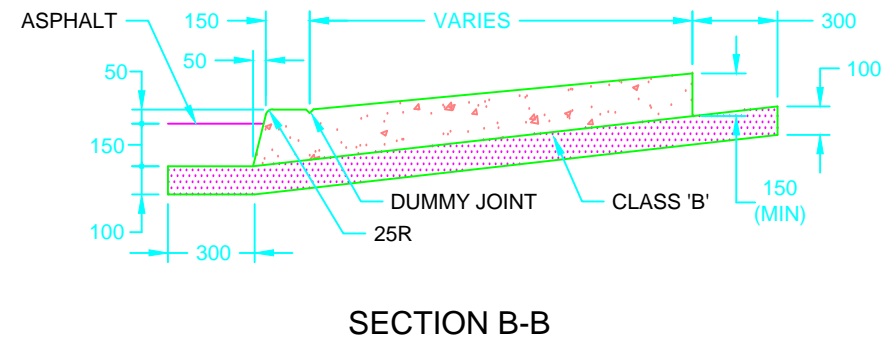

**SECTION B-B**

**NOTES:**

1. SIDEWALK THICKNESS AT RESIDENTIAL DRIVEWAYS AND ADJACENT TO CURB SHALL BE 150mm. AT COMMERCIAL AND INDUSTRIAL DRIVEWAYS, THE THICKNESS SHALL BE 200mm
2. FOR CONTRACTION JOINT DETAIL, SEE STANDARD DRAWING 04100.
3. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SHOWN.

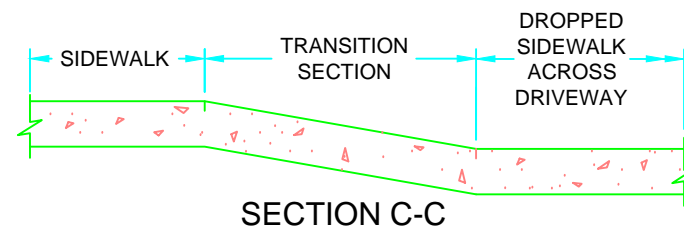

**SECTION C-C**

**MASTER  
SPECIFICATIONS**

**COMBINED CONCRETE  
CURB & SIDEWALK**

DRAWING NUMBER 04141

DATE:  
MARCH 2016

SCALE:  
N.T.S.