



Government of Newfoundland and Labrador
Department of Environment and Conservation
Water Resources Management Division

PERMIT TO ALTER A BODY OF WATER

Pursuant to the *Water Resources Act*, SNL 2002 cW-4.01, specifically Section(s) 48

Date: **APRIL 26, 2016**

File No: **525**
Permit No: **ALT8602-2016**


Permit Holder: **Northern Brook Cranberry Farm
PO Box 65
Botwood NL A0H 1E0**


Attention: **Kenneth Newhook**

Re: **Botwood - Cranberry Farm Expansion (Northern Arm Brook)**

Permission is hereby given for : **the construction of an irrigation pond to collect water and provide irrigation water and flood water for approximately 6 to 10 cranberry beds and the possible construction of additional cranberry beds, near the Town of Botwood, as outlined in the application received, dated April 4, 2016.**

- This Permit does not release the Permit Holder from the obligation to obtain appropriate approvals from other concerned municipal, provincial and federal agencies.
- The Permit Holder must obtain the approval of the Crown Lands Administration Division if the project is being carried out on Crown Land.
- This Permit is subject to the terms and conditions indicated in Appendices A and B (attached).
- It should be noted that prior to any significant changes in the design or installation of the proposed works, or in event of changes in ownership or management of the project, an amendment to this Permit must be obtained from the Department of Environment and Conservation under Section 49 of the *Water Resources Act*.
- Failure to comply with the terms and conditions will render this Permit null and void, place the Permit Holder and their agent(s) in violation of the *Water Resources Act* and make the Permit Holder responsible for taking any remedial measures as may be prescribed by this Department.

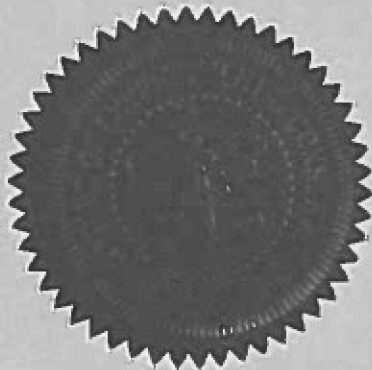


MINISTER

GOVERNMENT OF NEWFOUNDLAND AND LABRADOR
Department of Environment and Conservation

File No: 525
Permit No: ALT8602-2016

APPENDIX A
Terms and Conditions for Permit

Peat Drainage

1. The proposed drainage system shall consist of perimeter ditches, main ditches, and settling ponds. Ditches must be suitably designed, constructed, and maintained to lower the water table only to the extent necessary for operations.
2. Drainage ditches must collect and transport surface runoff in a manner that does not cause flooding, erosion or sedimentation of adjacent land or receiving waters.
3. The construction and operation of the peat harvesting site must not alter the drainage pattern, natural features, storage capacity, flow regime, or water quality of any body of water located adjacent to or downstream of the site.
4. The Permit Holder must prevent erosion of drainage ditches, streams or other natural bodies of water by installing rip-rap and/or sodding.
5. To preserve water quality, all effluent directed out of the project site must be contained in settling ponds before being discharged into receiving waters. Effluent discharged into receiving waters must comply with the *Environmental Control Water and Sewage Regulations, 2003*.
6. Perimeter ditches, canals and settling ponds must be periodically cleaned and deepened to maintain operational efficiency. This work must be carried out during periods of low flow and in a way that helps preserve water quality. If drainage ditches, streams, or other water bodies become blocked, the proponent must clear all flow obstructions.
7. Vehicles travelling over peat land must exert low bearing pressures.
8. A minimum depth of 0.5 metres of peat must be left above the mineral soil for the purpose of rehabilitation.
9. All settling ponds must be cleaned as often as necessary to maintain their operational efficiency.
10. A water quality monitoring program is not required at this time. However, the Department reserves the right to require that the Permit Holder sample, analyse, and submit results of water quality tests, for the purpose of ensuring that the water quality is maintained within acceptable guidelines. All analyses must be undertaken by a C.A.E.A.L. accredited laboratory.

Dyke/Berm Construction

11. The slopes along the perimeter of infilled areas must be no steeper than two horizontal to one vertical (2H:1V).
12. Reservoirs must be provided with a spillway of adequate capacity to safely discharge design flows at non-erosive velocities without causing flooding of the reservoir or damage to the spillway or section downstream channel.

General Alterations

13. Water pumped from excavations or work areas, or any runoff or effluent directed out of work sites, must have silt and turbidity removed by settling ponds, filtration, or other suitable treatment before discharging to a body of water. Effluent discharged into receiving waters must comply with the *Environmental Control Water and Sewage Regulations, 2003*.
14. All operations must be carried out in a manner that prevents damage to land, vegetation, and watercourses, and which prevents pollution of bodies of water.

15. All vehicles and equipment must be clean and in good repair, free of mud and oil, or other harmful substances that could impair water quality.
16. Any areas adversely affected by this project must be restored to a state that resembles local natural conditions. Further remedial measures to mitigate environmental impacts on water resources can and will be specified, if considered necessary in the opinion of the Department.
17. The bed, banks and floodplains of watercourses, or other vulnerable areas affected by this project, must be adequately protected from erosion by seeding, sodding or placing of rip-rap.
18. All waste materials resulting from this project must be disposed of at a site approved by the Department of Service NL.
19. Periodic maintenance such as painting, resurfacing, clearing of debris, or minor repairs, must be carried out without causing any physical disruption of any watercourse. Care must be taken to prevent spillage of pollutants into the water.
20. The owners of structures are responsible for any environmental damage resulting from dislodgement caused by wind, wave, ice action, or structural failure.
21. Sediment and erosion control measures must be installed before starting work. All control measures must be inspected regularly and any necessary repairs made if damage is discovered.
22. Fill material must be of good quality, free of fines or other substances including metals, organics, or chemicals that may be harmful to the receiving waters.
23. The attached Completion Report (Appendix C) for Permit No. 8602 must be completed and returned to this Department upon completion of the approved works. Pictures must be submitted along with the completion report, showing the project site prior to and after development.
24. This Permit is valid for two years from the date of issue. Work must be completed by that date or the application and approval procedure must be repeated.
25. The location of the work is highlighted on the Location Map for this Permit attached as Appendix D.
26. All work must be carried out within the proponent's legal property boundaries.

GOVERNMENT OF NEWFOUNDLAND AND LABRADOR
Department of Environment and Conservation

File No: 525
Permit No: ALT8602-2016

APPENDIX B
Special Terms and Conditions for Permit

1. The Permit Holder and its agent(s), subcontractor(s), and consultant(s) shall keep all systems and works in good condition and repair and in accordance with all laws, by-laws, directions, rules and regulations of any governmental authority. The Permit Holder or its agent(s), subcontractor(s), or consultant(s) shall immediately notify the Minister if any problem arises which may threaten the structural stability of the systems and works, endanger public safety and/or the environment or adversely affect others and/or any body of water either in or outside the said Project areas. The Permit Holder and its agent(s), subcontractor(s), and consultant(s) shall be responsible for all damages suffered by the Minister and Government resulting from any defect in the systems and works, operational deficiencies/inadequacies, or structural failure.
2. The Permit Holder and its agent(s), subcontractor(s), and consultant(s) shall operate the said Project and its systems and works in a manner which does not cause any water related and/or environmental problems, including but not limited to problems of erosion, deposition, flooding, and deterioration of water quality and groundwater depletion, in or outside the said Project areas. The Permit Holder and its agent(s), subcontractor(s), and consultant(s) shall be responsible for any and all damages associated with these problems caused as a result of changes, deficiencies, and inadequacies in the operational procedures by the Permit Holder or its agent(s), subcontractor(s), or consultant(s).
3. If the Permit Holder or its agent(s), subcontractor(s), or consultant(s) fails to perform, fulfil, or observe any of the terms and conditions, or provisions of this Permit and/or Ministerial orders and guidelines, as determined by this Department, the Minister may, after providing ten (10) day notice to the Permit Holder, amend, modify, suspend or cancel this Permit in accordance with the *Water Resources Act*.
4. The Permit Holder and its agent(s), subcontractor(s), and consultant(s) indemnify and hold the Minister and Government harmless against any and all liabilities, losses, claims, demands, damages or expenses including legal expenses of any nature whatsoever whether arising in tort, contract, statute, trust or otherwise resulting directly or indirectly from granting this Permit, systems and works in or outside the said Project areas, or any act or omission of the Permit Holder or its agent(s), subcontractor(s), or consultant(s) in or outside the said Project areas, or arising out of a breach or non-performance of any of the terms and conditions, or provisions of this Permit by the Permit Holder or its agent(s), subcontractor(s), or consultant(s).
5. This Permit is subject to all provisions of the *Water Resources Act* and any regulations in effect either at the date of this Permit or hereafter made pursuant thereto or any other relevant legislation enacted by the Province of Newfoundland and Labrador in the future.
6. This Permit shall be construed and interpreted in accordance with the laws of the Province of Newfoundland and Labrador.

File No: **525**
Permit No: **ALT8602-2016**

- cc: Dr. Abdel-Zaher Kamal Abdel-Razek, Ph. D., P.Eng.
Manager, Water Rights and Investigations Section
Water Resources Management Division
Department of Environment and Conservation
P.O. Box 8700
St. John's NL A1B 4J6
- cc: File Copy for Binder
- cc: Mr. Rodger Primmer (C)
Manager, Central Regional Crown Lands
PO Box 2222
Gander NL A1V 1T5
- cc: Fisheries Protection Division
Ecosystem Management Branch
Fisheries and Oceans Canada
P.O. Box 5667
St. John's NL A1C 5X1
- cc: Town of Botwood
Ms. Audrey Rowsell
PO Box 490
Botwood NL A0H 1E0



Government of Newfoundland and Labrador
Department of Environment and Conservation
Water Resources Management Division

Appendix C - Completion Report

Pursuant to the *Water Resources Act*, SNL 2002 cW-4.01, specifically Section(s) 48

Date: APRIL 26, 2016

File No: 525
Permit No: ALT8602-2016

Permit Holder: Northern Brook Cranberry Farm
PO Box 65
Botwood NL A0H 1E0

Attention: Kenneth Newhook

Re: Botwood - Cranberry Farm Expansion (Northern Arm Brook)

Permission was given for : the construction of an irrigation pond to collect water and provide irrigation water and flood water for approximately 6 to 10 cranberry beds and the possible construction of additional cranberry beds, near the Town of Botwood, as outlined in the application received, dated April 4, 2016.

I (the Permit Holder named above or agent authorized to represent the Permit Holder) do hereby certify that the project described above was completed in accordance with the plans and specifications submitted to the Department of Environment and Conservation and that the work was carried out in strict compliance with the terms and conditions of the Permit issued for this project.

Date: _____ Signature: _____

This completion report must be completed and forwarded to the following address upon completion of the approved work.

Department of Environment and Conservation
Water Resources Management Division
PO Box 8700
St. John's NL A1B 4J6

APPENDIX D
Location Map for Permit

