

PERMIT TO ALTER A BODY OF WATER

Pursuant to the *Water Resources Act*, SNL 2002 cW-4.01, specifically Section(s) 48

Date: MARCH 03, 2017

File No: 533-04
Permit No: ALT8294-2017


Permit Holder: **Corner Brook Pulp and Paper Ltd.**
P.O. Box 2001
Corner Brook NL A2H 6J4

Attention: **Mr. Barry Elkins**

Re: **Various Bodies of Water - Stream Crossings**

Permission is hereby given for : stream crossing projects that require one culvert (not greater than 2000mm diameter), a bridge with a maximum span of 5m, or fording at various water bodies located outside designated protected water supply areas to facilitate the installation of culverts and bridges and fording during Permit Holder's operating seasons, with reference to the application received on March 31, 2015 and further information provided on or before March 3, 2017.

- This Permit does not release the Permit Holder from the obligation to obtain appropriate approvals from other concerned municipal, provincial and federal agencies.
- The Permit Holder must obtain the approval of the Crown Lands Administration Division if the project is being carried out on Crown Land.
- This Permit is subject to the terms and conditions indicated in Appendices A and B (attached).
- It should be noted that prior to any significant changes in the design or installation of the proposed works, or in event of changes in ownership or management of the project, an amendment to this Permit must be obtained from the Department of Municipal Affairs and Environment under Section 49 of the *Water Resources Act*.
- Failure to comply with the terms and conditions will render this Permit null and void, place the Permit Holder and their agent (s) in violation of the *Water Resources Act* and make the Permit Holder responsible for taking any remedial measures as may be prescribed by this Department.

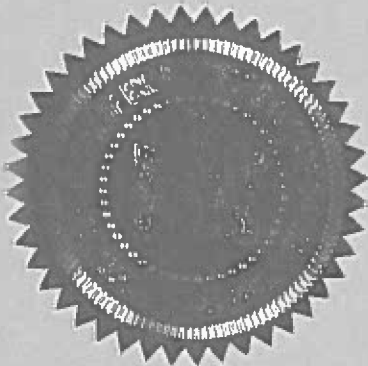

MINISTER

APPENDIX A
Terms and Conditions for Permit

Special Conditions

1. The Permit Holder must apply for and obtain a separate permit under the Water Resources Act, SNL 2002 cW-4.01, specifically Section 39 <http://assembly.nl.ca/Legislation/sr/statutes/w04-01.htm> for any stream crossing project within any designated Protected Public Water Supply Area servicing any community as indicated in Water Resources Portal available at <https://maps.gov.nl.ca/water/mapbrowser/Default.aspx>.
2. The Permit Holder may be required to apply for and obtain a separate permit under the Water Resources Act, SNL 2002 cW-4.01, specifically Section 48 <http://assembly.nl.ca/Legislation/sr/statutes/w04-01.htm> for any stream crossing project within any designated flood risk area as indicated at <http://www.env.gov.nl.ca/env/waterres/flooding/fm.html>.
3. The crossing structure must provide adequate capacity to safely discharge flood flows without causing backwater effects upstream and increased flow velocity downstream.
4. For any stream crossing project carried out under this Permit, the Permit Holder must notify this Department via email to waterinvestigations@gov.nl.ca or facsimile at (709)729-0320 in accordance with a reporting protocol as deemed necessary and appropriate in the opinion of the Minister. Also, any stream crossing project carried out under this Permit shall be subject to the payment of applicable fee by the Permit Holder as stated in the application fee schedules approved by the Minister.
5. The Permit Holder acknowledges and agrees that this Permit may require and will be amended to include further provisions pursuant to the Water Resources Act, SNL 2002 cW-4.01 and its regulations and policies in effect thereunder from time to time, as deemed necessary in the opinion of the Minister.
6. A water quality monitoring program is not required at this time. However, this Department reserves the right to require that the Permit Holder sample, analyse, and submit results of water quality tests, for the purpose of ensuring that the water quality is maintained within acceptable guidelines. All analyses must be undertaken by a CALA accredited laboratory. Also, this Department reserves the right to require that the Permit Holder set-up monitoring stations through a Memorandum of Agreement under the Water Resources Act, SNL 2002 cW-4.01 and its regulations and policies in effect thereunder from time to time, as deemed necessary in the opinion of the Minister.
7. Corner Brook Pulp and Paper Ltd. (Kruger) Standard Operating Procedures for Deactivating Roads and Stream Crossings and Open-Bottomed Structures for Large Crossings shall be followed in conjunction with the Terms and Conditions of this Permit.

Culvert Installation

8. Drainage ditches must collect and transport surface runoff in a manner that does not cause flooding, erosion or sedimentation of adjacent land or receiving waters.
9. Inlet and outlet areas of culvert installations must be adequately protected from erosion by placing rip-rap, fitted stone, or concrete headwalls.
10. Culvert installations must follow the stream channel gradient to the maximum extent possible and placed in line with the direction of the main flow to minimize disturbance to the channel. Culverts must not disrupt the flow of water or cause ponding at the upstream side of the installation.
11. In multiple culvert installations, one culvert must be set a minimum of 150 mm lower than the others to provide adequate water depth and velocity for fish passage during low flow conditions. In addition, multiple culverts must be installed within 0.6 to 0.9 metres apart for maximum stability.
12. Where pumping is used to bypass flow, cofferdams must be installed both above and below areas of construction. The Permit Holder must provide pumps with sufficient capacity to prevent washout of cofferdams.
13. Cofferdams must be properly designed and constructed of suitable materials to prevent leakage and to resist loss of any

material as a result of erosion. Cofferdams must be removed upon completion of their intended function. All material must be removed carefully to prevent disturbance of the water body and to prevent water quality degradation.

14. All work involving minor alteration to the stream channel to permit culvert placement must be carried out at a time of low flow, and in a manner that prevents downstream siltation and unnecessary alteration of the channel.
15. Grading and finishing of roadways or road embankments must not cause damage to culverts or allow road material to enter the watercourse.
16. Roadside embankments near the watercourse must be adequately protected from erosion by sodding, seeding or placing of rip-rap.
17. Culverts must be inspected regularly so that immediate action can be taken to clear blockages caused by ice or debris or to undertake repairs as required.
18. The inlet and outlet of culverts must be clearly marked so that operators of road grading and snow clearing equipment can avoid blocking culverts.
19. Any damage to culverts during installation or due to inadequate capacity and/or improper construction must be reported to this Department. Damaged culverts must be replaced immediately to prevent overtopping, erosion, or flooding.
20. If a culvert is installed in natural fish habitat it must be embedded a minimum of 150 mm below the natural streambed (up to a maximum of 1/3 of the culvert diameter).

Bridge Construction

21. The use of creosote treated wood is strictly prohibited within 15 metres of all bodies of fresh water in the province.
22. Drainage ditches must collect and transport surface runoff in a manner that does not cause flooding, erosion or sedimentation of adjacent land or receiving waters.
23. Bridge abutments must be set back 0.5 metres from the normal edge of a watercourse to prevent constriction during high flow conditions.
24. Infilling must not cause increased water elevation upstream or increase flow velocity downstream of the site. Reduction of the natural cross sectional area of any watercourse is not permitted.
25. The upstream and downstream sides of abutments must be protected with rip-rap, concrete or heavy timber to prevent erosion and scouring.
26. Where pumping is used to bypass flow, cofferdams must be installed both above and below areas of construction. The Permit Holder must provide pumps with sufficient capacity to prevent washout of cofferdams.
27. Cofferdams must be properly designed and constructed of suitable materials to prevent leakage and to resist loss of any material as a result of erosion. Cofferdams must be removed upon completion of their intended function. All material must be removed carefully to prevent disturbance of the water body and to prevent water quality degradation.
28. Abutments and piers must be constructed in the dry and during times of low flow.
29. Roadside embankments near the watercourse must be adequately protected from erosion by sodding, seeding or placing of rip-rap.
30. Adequate erosion protection must be provided where roadside ditches discharge into watercourses near bridges.

Fording

31. Except for single passenger all-terrain vehicles, crossings by other vehicles or construction equipment shall be limited to one trip in and one trip out. However, more than one trip in and one trip out are permitted as may be deemed necessary due to the nature of a project carried out under this Permit.
32. Timbers or rocks shall be placed in streams to facilitate crossing or to minimize damage to the channel sections provided the streams are not unnecessarily constricted or backed up.

33. Alteration of the natural minimum streamflow is not permitted in order to preserve aquatic life.
34. Stream banks at fording sites that contain loose or erodible material must be adequately stabilized before crossing to minimize any siltation of streams.
35. The natural course of any stream must not be altered.
36. Infilling must not cause increased water elevation upstream or increase flow velocity downstream of the site. Reduction of the natural cross sectional area of any watercourse is not permitted.
37. The fording sites must be located at shallow sections of the channels where there are low approach grades, and where the channels consists of stable non-erodible rock or cobbles.
38. Fording shall only be carried out during periods of low water levels.
39. When the fording sites are no longer required, the Permit Holder must dismantle and remove all constructed works and restore the sites to their original condition. All material placed in streams must be completely removed.
40. A complete oil spill clean-up kit must be on site at all times when gasoline or fuel powered equipment is being used or refuelled. The kit must contain the following:
 - One hand operated fuel pump
 - One recovery container such an empty 205 litre drum
 - One shovel
 - One pick ax
 - Five metres of containment boom
 - Five absorbent pads
 - Twenty-five litres of loose absorbent material
41. Within 30 days after expiry of this Permit or as deemed necessary by the Minister based on the reporting protocol, the Permit Holder must submit to this Department a report confirming that each fording location was left in as good or better condition than prior to Permit Holder's fording activities. This report should include detailed pictures of each site before and after project activities.

General Alterations

42. Any work that must be performed below the high water mark must be carried out during a period of low water levels.
43. Any flowing or standing water must be diverted around work sites so that work is carried out in the dry.
44. Water pumped from excavations or work areas, or any runoff or effluent directed out of work sites, must have silt and turbidity removed by settling ponds, filtration, or other suitable treatment before discharging to a body of water. Effluent discharged into receiving waters must comply with the *Environmental Control Water and Sewage Regulations, 2003*.
45. All operations must be carried out in a manner that prevents damage to land, vegetation, and watercourses, and which prevents pollution of bodies of water.
46. The use of heavy equipment in streams or bodies of water is not permitted. The operation of heavy equipment must be confined to dry stable areas.
47. All vehicles and equipment must be clean and in good repair, free of mud and oil, or other harmful substances that could impair water quality.
48. During the construction of concrete components, formwork must be properly constructed to prevent any fresh concrete from entering a body of water. Dumping of concrete or washing of tools and equipment in any body of water is prohibited.
49. Wood preservatives such as penta, CCA or other such chemicals must not be applied to timber near a body of water. All treated wood or timber must be thoroughly dry before being brought to any work site and installed.
50. Any areas adversely affected by a project carried out under this Permit must be restored to a state that resembles local natural conditions. Further remedial measures to mitigate environmental impacts on water resources can and will be specified, if considered necessary in the opinion of the Minister.

51. The bed, banks and floodplains of watercourses, or other vulnerable areas affected by this project, must be adequately protected from erosion by seeding, sodding or placing of rip-rap.
52. All waste materials resulting from this project must be disposed of at a site approved by the Department of Service NL.
53. Periodic maintenance such as painting, resurfacing, clearing of debris, or minor repairs, must be carried out without causing any physical disruption of any watercourse. Care must be taken to prevent spillage of pollutants into the water.
54. The owners of structures are responsible for any environmental damage resulting from dislodgement caused by wind, wave, ice action, or structural failure.
55. Sediment and erosion control measures must be installed before starting work. All control measures must be inspected regularly and any necessary repairs made if damage is discovered.
56. Fill material must be of good quality, free of fines or other substances including metals, organics, or chemicals that may be harmful to the receiving waters.
57. The attached Completion Report (Appendix C) for Permit No. 8294 must be completed and returned to this Department upon completion of stream crossing projects under this Permit along with a written report including all completed stream crossings. Pictures of completed stream crossings must be submitted along with the completion report and written report, showing the projects sites prior to and after stream crossing projects completed under this Permit.
58. This Permit is effective January 1, 2016 and shall expire on December 31, 2018 or earlier if modified, suspended or cancelled by the Minister. Also, this Permit may be renewed by the Minister for such renewal term as the Minister deems appropriate, on such terms and conditions as the Minister considers appropriate and in the public interest, provided the Permit Holder applies for the renewal at least hundred and eighty (180) days before the expiry of this Permit.
59. All work must be carried out within the proponent's legal property boundaries. The Permit Holder acknowledges and agrees that this Permit does not grant any interest in land or any exclusive right in or to use or occupy lands.
60. Except as stated in Clause # 31 under **FORDING**, the use of heavy equipment in streams or bodies of water is not permitted. The operation of heavy equipment must be confined to dry stable areas.

GOVERNMENT OF NEWFOUNDLAND AND LABRADOR
Department of Municipal Affairs and Environment

File No: 533-04
Permit No: ALT8294-2017

APPENDIX B
Special Terms and Conditions for Permit

1. The Permit Holder and its agent(s), subcontractor(s), and consultant(s) shall keep all systems and works in good condition and repair and in accordance with all laws, by-laws, directions, rules and regulations of any governmental authority. The Permit Holder or its agent(s), subcontractor(s), or consultant(s) shall immediately notify the Minister if any problem arises which may threaten the structural stability of the systems and works, endanger public safety and/or the environment or adversely affect others and/or any body of water either in or outside the said Project areas. The Permit Holder and its agent(s), subcontractor(s), and consultant(s) shall be responsible for all damages suffered by the Minister and Government resulting from any defect in the systems and works, operational deficiencies/inadequacies, or structural failure.
2. The Permit Holder and its agent(s), subcontractor(s), and consultant(s) shall operate the said Project and its systems and works in a manner which does not cause any water related and/or environmental problems, including but not limited to problems of erosion, deposition, flooding, and deterioration of water quality and groundwater depletion, in or outside the said Project areas. The Permit Holder and its agent(s), subcontractor(s), and consultant(s) shall be responsible for any and all damages associated with these problems caused as a result of changes, deficiencies, and inadequacies in the operational procedures by the Permit Holder or its agent(s), subcontractor(s), or consultant(s).
3. If the Permit Holder or its agent(s), subcontractor(s), or consultant(s) fails to perform, fulfil, or observe any of the terms and conditions, or provisions of this Permit and/or Ministerial orders and guidelines, as determined by this Department, the Minister may, after providing ten (10) day notice to the Permit Holder, amend, modify, suspend or cancel this Permit in accordance with the *Water Resources Act*.
4. The Permit Holder and its agent(s), subcontractor(s), and consultant(s) indemnify and hold the Minister and Government harmless against any and all liabilities, losses, claims, demands, damages or expenses including legal expenses of any nature whatsoever whether arising in tort, contract, statute, trust or otherwise resulting directly or indirectly from granting this Permit, systems and works in or outside the said Project areas, or any act or omission of the Permit Holder or its agent(s), subcontractor(s), or consultant(s) in or outside the said Project areas, or arising out of a breach or non-performance of any of the terms and conditions, or provisions of this Permit by the Permit Holder or its agent(s), subcontractor(s), or consultant(s).
5. This Permit is subject to all provisions of the *Water Resources Act* and any regulations in effect either at the date of this Permit or hereafter made pursuant thereto or any other relevant legislation enacted by the Province of Newfoundland and Labrador in the future.
6. This Permit shall be construed and interpreted in accordance with the laws of the Province of Newfoundland and Labrador.

File No: 533-04
Permit No: ALT8294-2017

- cc: Fisheries Protection Division
Ecosystem Management Branch
Fisheries and Oceans Canada
P.O. Box 5667
St. John's, NL A1C 5X1
FPP-NL@dfo-mpo.gc.ca
- cc: Dr. Abdel-Zaher Kamal Abdel-Razek, Ph. D., P.Eng.
Manager, Water Rights and Investigations Section
Water Resources Management Division
Department of Municipal Affairs and Environment
P.O. Box 8700
4th Floor, West Block, Confederation Building
St. John's, NL A1B 4J6
aabdelrazek@gov.nl.ca
-



Government of Newfoundland and Labrador
Department of Municipal Affairs and Environment
Water Resources Management Division

Appendix C - Completion Report

Pursuant to the *Water Resources Act*, SNL 2002 cW-4.01, specifically Section(s) 48

Date: **MARCH 03, 2017**

File No: **533-04**
Permit No: **ALT8294-2017**

Permit Holder: **Corner Brook Pulp and Paper Ltd.
P.O. Box 2001
Corner Brook NL A2H 6J4**

Attention: **Mr. Barry Elkins**

Re: **Various Bodies of Water - Stream Crossings**

Permission was given for : stream crossing projects that require one culvert (not greater than 2000mm diameter), a bridge with a maximum span of 5m, or fording at various water bodies located outside designated protected water supply areas to facilitate the installation of culverts and bridges and fording during Permit Holder's operating seasons, with reference to the application received on March 31, 2015 and further information provided on or before March 3, 2017.

I (the Permit Holder named above or agent authorized to represent the Permit Holder) do hereby certify that the project described above was completed in accordance with the plans and specifications submitted to the Department of Municipal Affairs and Environment and that the work was carried out in strict compliance with the terms and conditions of the Permit issued for this project.

Date: _____ Signature: _____

This completion report must be completed and forwarded to the following address upon completion of the approved work.

Department of Municipal Affairs and Environment
Water Resources Management Division
PO Box 8700
St. John's NL A1B 4J6