

# **Real Time Water Quality Report Southwest Brook below Southwest Pond**

**Deployment Period 2011-12-02 to 2012-01-23**

**2012-01-27**



**Government of Newfoundland & Labrador  
Department of Environment and  
Conservation  
Water Resources Management Division**

## General

- This station is operated cooperatively with the Miawpukek First Nation (Conne River) as a Pilot Project for Drinking Water Source Monitoring. This is the only known application of Real Time Water Quality Monitoring for a drinking water source for any First Nations community in Canada.
- The Water Resources Management Division (WRMD) staff monitors the real-time web page on a daily basis. Any unusual observations are investigated, with site visits being carried out as warranted.
- Operators at Conne River are informed of any significant water quality events or instrumentation problems by WRMD.
- Site visits for QA/QC purposes are conducted by WRMD approximately four times per year.
- Monthly calibration and maintenance is undertaken by Cyrus Lambert at the Conne River Water Treatment Plant.

## Maintenance and Calibration of Instrumentation

- After being cleaned and freshly calibrated the regular **DataSonde**<sup>®</sup> (s/n 44422) was installed on December 2, 2011, and remained deployed continuously until January 23, 2012, a 51 day period.

## Quality Assurance / Quality Control (QA/QC) Measures

- As part of the QA/QC protocol, an assessment of the reliability of data recorded by an instrument is made at the beginning and end of the deployment period. The procedure is based on the approach used by the United States Geological Survey. See **Table 1**.

Parameter	Rank				
	Excellent	Good	Fair	Marginal	Poor
Temperature (oC)	<=+/-0.2	>+/-0.2 to 0.5	>+/-0.5 to 0.8	>+/-0.8 to 1	<+/-1
pH (unit)	<=+/-0.2	>+/-0.2 to 0.5	>+/-0.5 to 0.8	>+/-0.8 to 1	>+/-1
Sp. Conductance (µS/cm)	<=+/-3	>+/-3 to 10	>+/-10 to 15	>+/-15 to 20	>+/-20
Sp. Conductance > 35 µS/cm (%)	<=+/-3	>+/-3 to 10	>+/-10 to 15	>+/-15 to 20	>+/-20
Dissolved Oxygen (mg/L)	<=+/-0.3	>+/-0.3 to 0.5	>+/-0.5 to 0.8	>+/-0.8 to 1	>+/-1
Turbidity <40 NTU (NTU)	<=+/-2	>+/-2 to 5	>+/-5 to 8	>+/-8 to 10	>+/-10
Turbidity > 40 NTU (%)	<=+/-5	>+/-5 to 10	>+/-10 to 15	>+/-15 to 20	>+/-20

**Table 1**

- Upon deployment and removal, a QA/QC **MiniSonde**<sup>®</sup> is temporarily deployed along side the Field **DataSonde**<sup>®</sup>. Values for each recorded parameter are compared between the two instruments. Based on the difference between parameters recorded by the Field **DataSonde**<sup>®</sup> and QA/QC **MiniSonde**<sup>®</sup> a qualitative statement (Ranking) is usually made on the data.
- The ranking at the beginning and end of the deployment period are shown in **Table 2**.

- With the exception of water quantity data (Stage and Flow), all data used in the preparation of the graphs and subsequent discussion below adhere to this stringent QA/QC protocol. Water Survey of Canada is responsible for QA/QC of water quantity data. Corrected data can be obtained upon request.

Southwest Brook below Southwest Pond (NF02ZE0033)		
Date (yyyy-mm-dd)	Parameter	Ranking
2011-12-02 Deployment	Temp (°C)	Excellent
	pH (units)	Excellent
	Sp. Conductivity (uS/cm)	Excellent
	Dissolved Oxygen (mg/L)	Excellent
	Turbidity (NTU)	Excellent
2012-01-23 Removal	Temp (°C)	Excellent
	pH (units)	Excellent
	Sp. Conductivity (uS/cm)	Good
	Dissolved Oxygen (mg/L)	Excellent
	Turbidity (NTU)	Excellent

**Table 2**

### Data Interpretation

- The water temperature (**Figure 1**) ranged from a minimum of  $-0.06^{\circ}\text{C}$  to a maximum of  $5.11^{\circ}\text{C}$ , with temperature generally decreasing over the deployment period.
- There appears to be little correlation with stage.

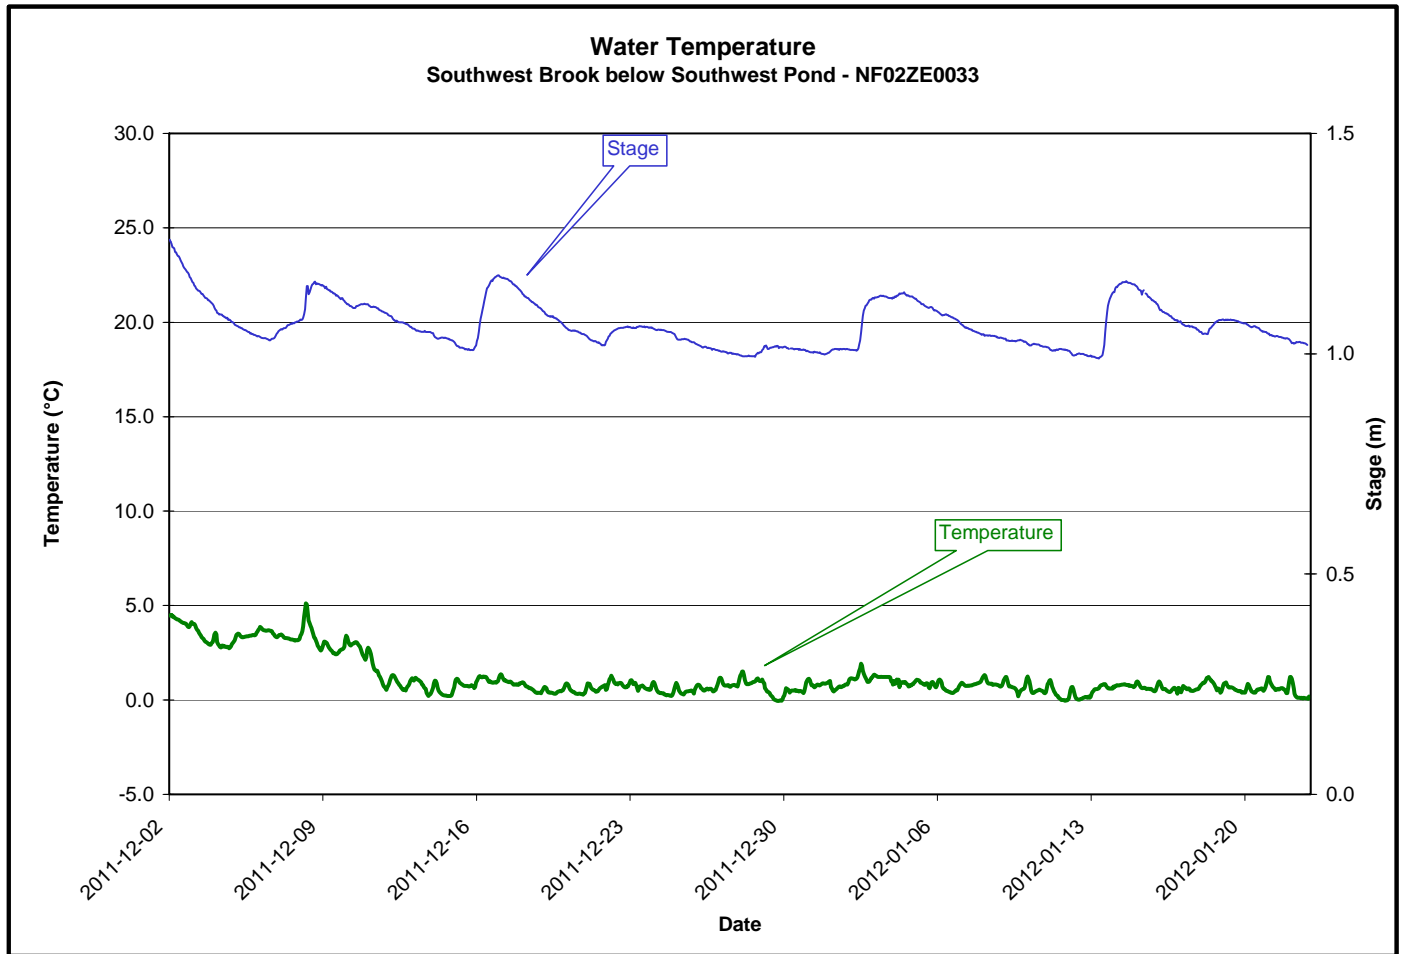
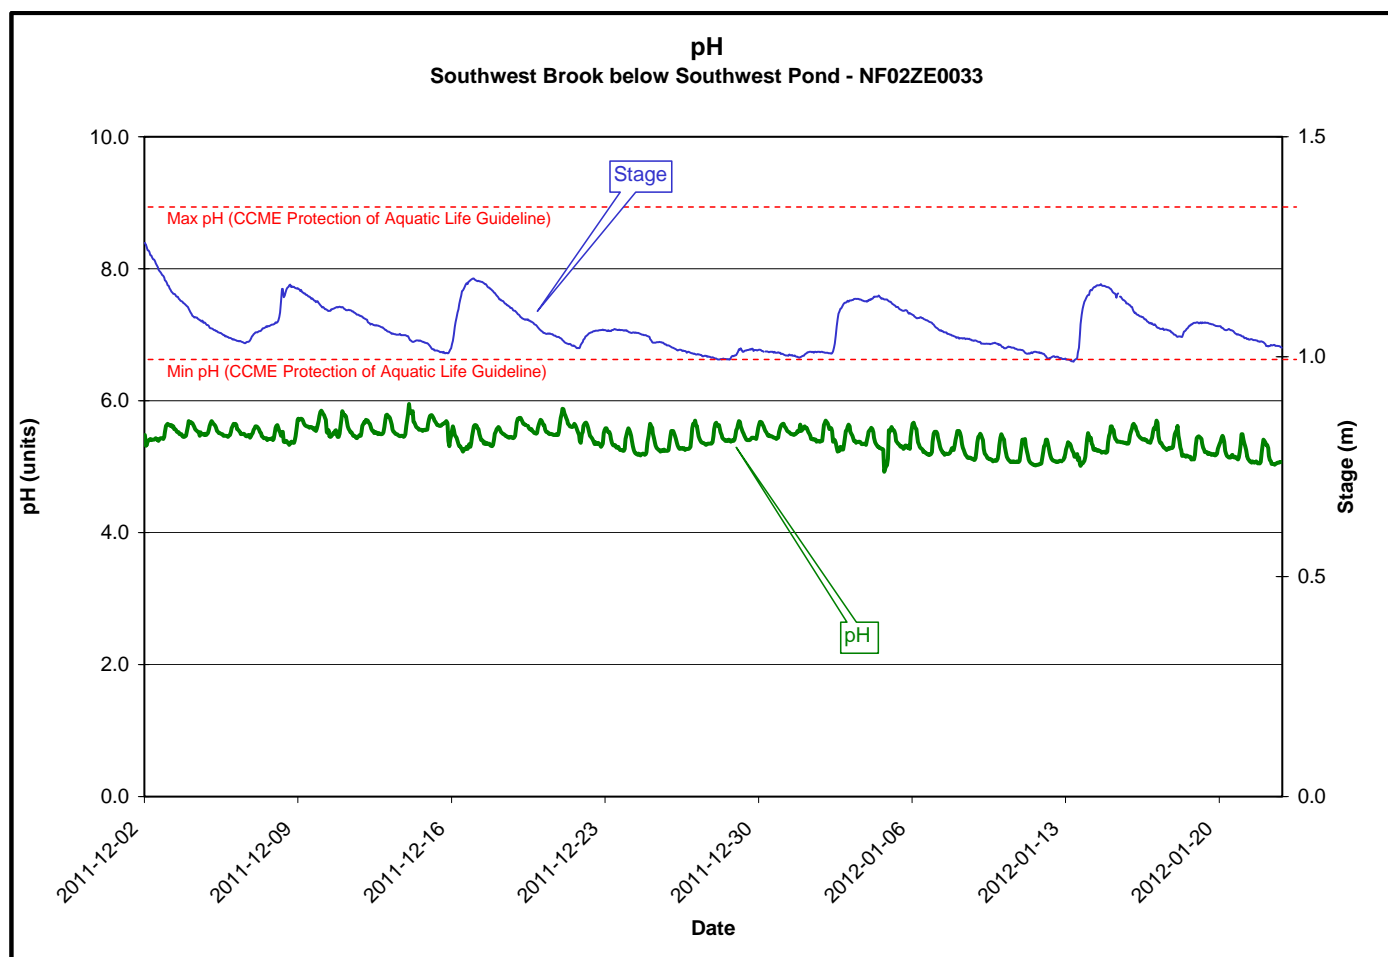
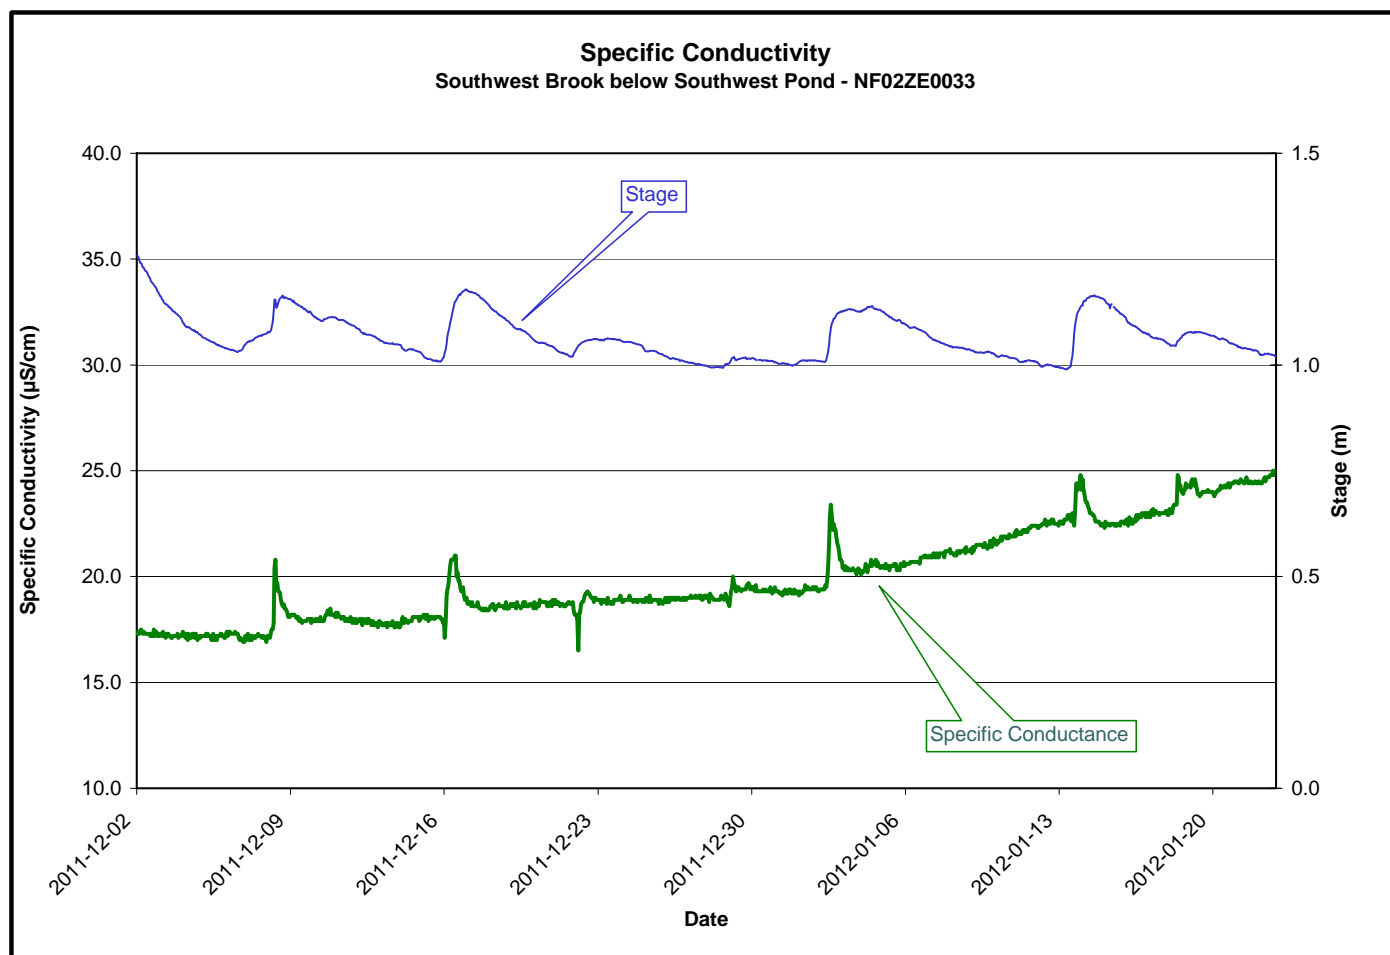


Figure 1


- Throughout the deployment period pH values (**Figure 2**) ranged from a minimum of 4.92 to a maximum of 5.95 with all the values falling well below the recommended range (6.5 – 9.0) for the CCME *Canadian Water Quality Guidelines for the Protection of Aquatic Life*.
- The background pH of this stream is normally lower than the lower limit of the recommended range.
- During this deployment period, the inverse correlation with stage that is sometimes obvious is less evident, with little recorded change in pH.

**Figure 2**


- The specific conductivity (**Figure 3**) ranged from a minimum of 16.5  $\mu\text{S}/\text{cm}$  to a maximum of 25.0  $\mu\text{S}/\text{cm}$  over the deployment period, with a slight increase over the deployment period, typical of an increase in basal groundwater flow during the winter months.
- Specific conductivity appears to be correlated with increases in stage.
- In the graph below five distinct examples are evident where specific conductivity spikes slightly during the rising leg of the hydrograph.

**Figure 3**

- The dissolved oxygen (**Figure 4**) values ranged from a minimum of 12.07 mg/L to a maximum of 13.97 mg/L over the deployment period. With the percent saturation ranging between 91.6 and 97.5.
- Dissolved oxygen (mg/L) is generally inversely proportional to water temperature.
- Throughout the deployment period dissolved oxygen values consistently fell above the upper limit recommended by CCME *Canadian Water Quality Guidelines for the Protection of Aquatic Life* (cold water/other life stages – above 6.5 mg/L; cold water/early life stages – above 9.5 mg/L).
- Based upon the fact that Dissolved Oxygen % Saturation had minimal change over the deployment period, we can be confident that the Dissolved Oxygen mg/L values are accurate.

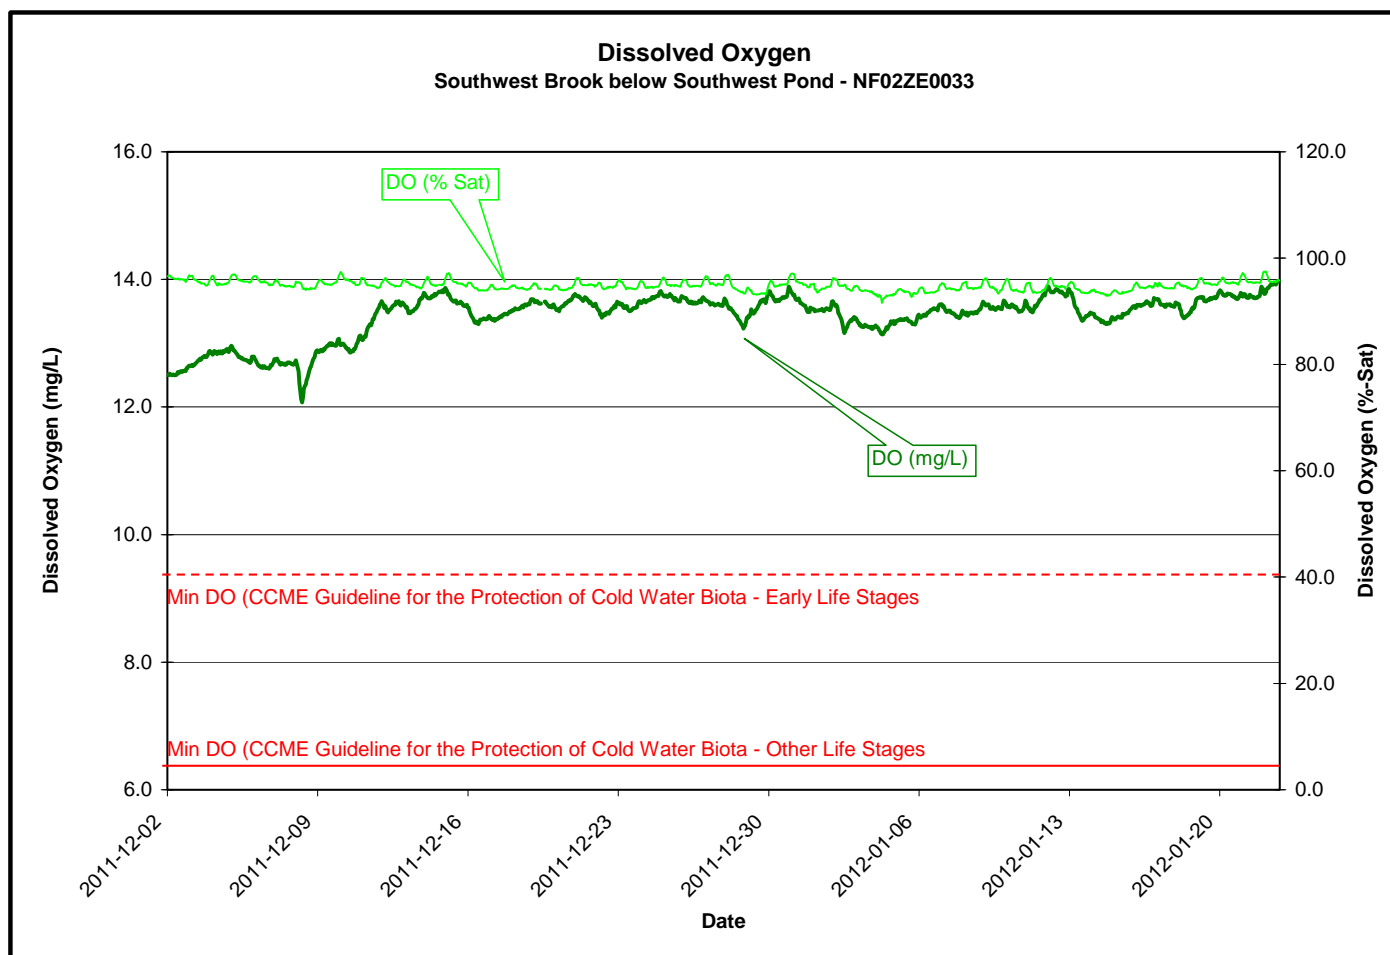
**Figure 4**

- The turbidity values (**Figure 5**) ranged from a minimum of 0.0 NTU to a maximum of 7.5 NTU.
- During this deployment period, an effort was made to place the instrument away from the plunge pool and the influences of turbulent water.
- Turbidity was minimal during this deployment period, with only three brief events recorded during high flow events near the beginning of the deployment period.

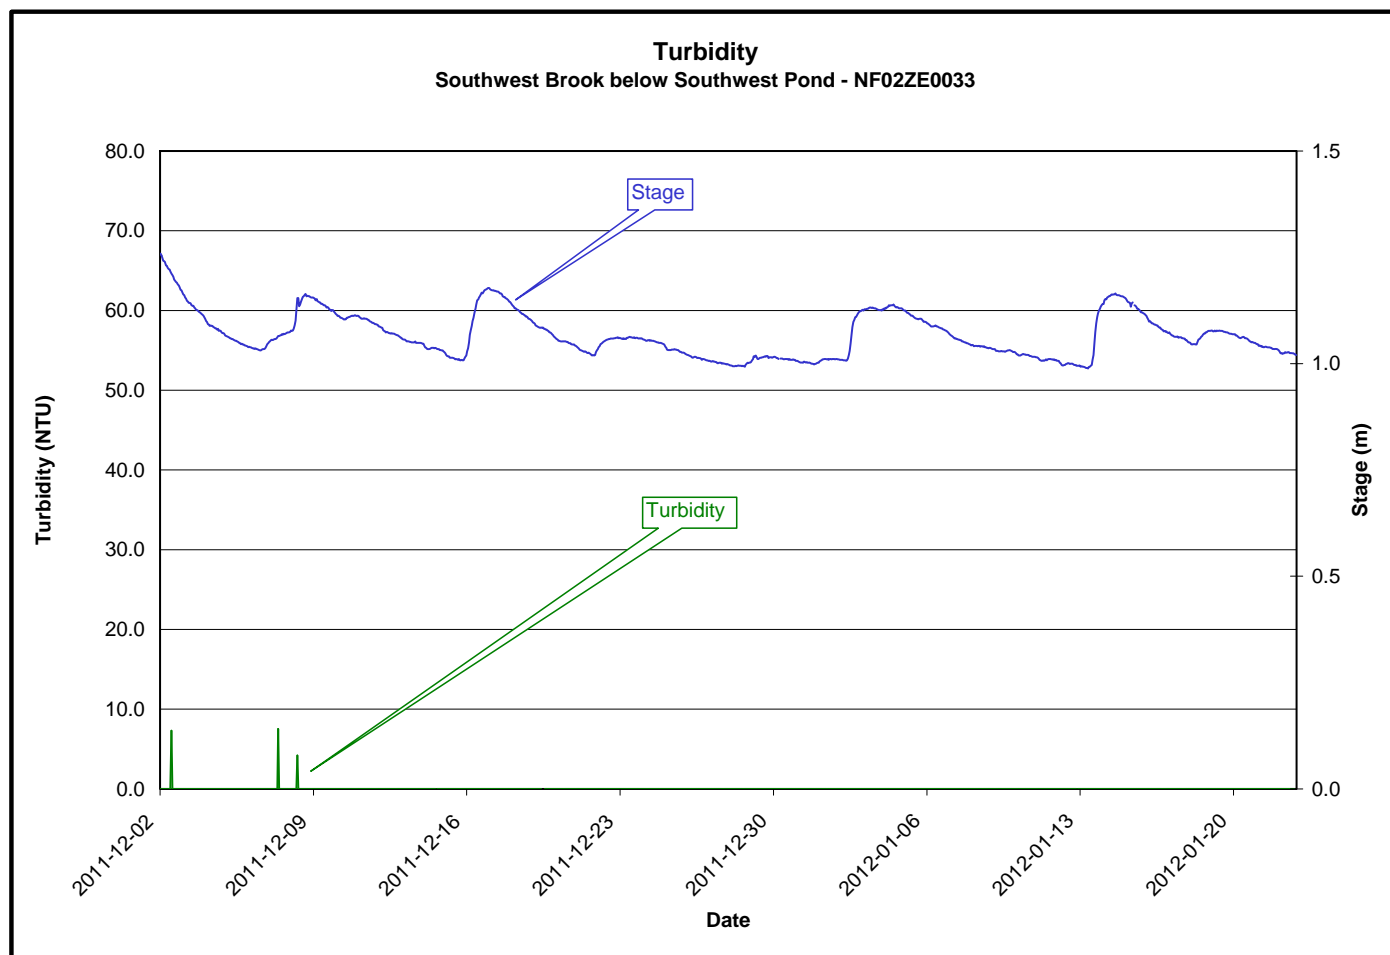**Figure 5**



- The stage or water level ranged from a minimum of 0.99 m to a maximum of 1.26 m. The flow or discharge ranged from a minimum of 0.15 m<sup>3</sup>/s to a maximum of 2.16 m<sup>3</sup>/s (**Figure 6**).
- The increase in stage and flow is resultant from precipitation events.
- Stream flow and discharge are within normal range.

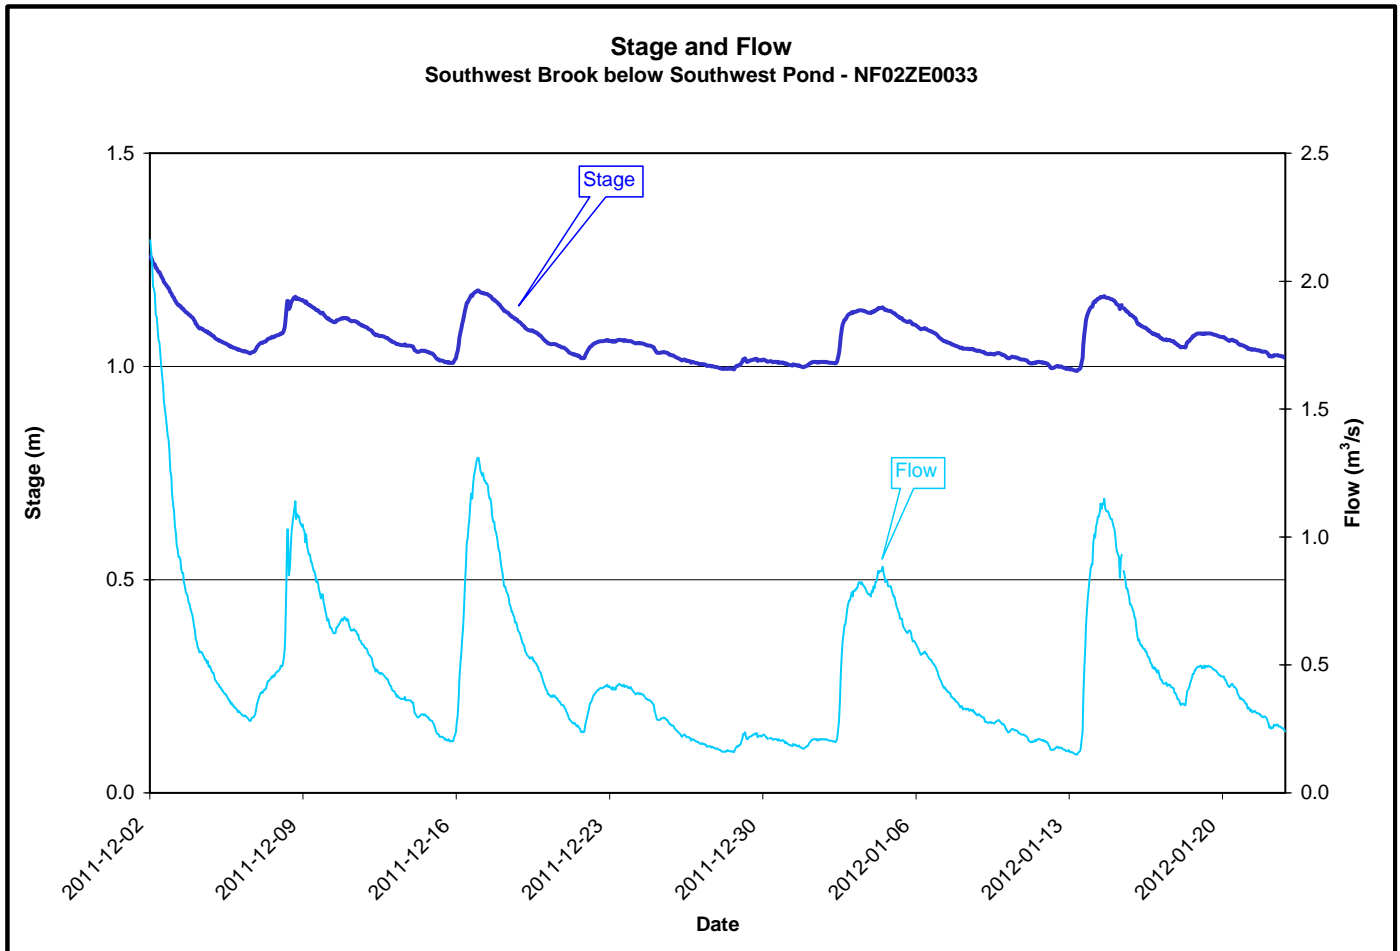

**Figure 6**

Prepared by:

Robert Wight  
Environmental Scientist  
Water Resources Management Division  
Department of Environment and Conservation  
Tel: 709-292-4280  
Fax: 709-292-4365  
e-mail: [robertwight@gov.nl.ca](mailto:robertwight@gov.nl.ca)