

Real Time Water Quality Monthly Report Waterford River - St. John's NL November 2006

General

 Data from the Waterford River monitoring station is monitored by the Water Resources Management Division staff on a monthly basis.

Maintenance and Calibration of Instrumentation

• The following table displays the dates when the Datasonde was removed for routine cleaning, maintenance and calibration and when it was redeployed.

Table 1: Table of Datasonde removal and installation dates


Date Installed	Date Removed				
	November 24, 2006				
November 25, 2006					

 Water quality readings were taken with a Minisonde at the time of removal for comparison purposes. The Minisonde was calibrated prior to use.

Data Interpretation


- Areas in the graphs where the data lines go abruptly down to the x axis and show no readings occur when the datasonde is removed for routine cleaning, maintenance and calibration. The dates where this occurs correspond to Table 1 above.
- In general, water quality parameters were stable during the month of November with expected daily/nightly (diurnal) and seasonal changes occurring.
- Water temperatures fluctuated in response to daily maximum and minimum air temperatures. This is demonstrated by comparing the graph in **Figure 1** to the air temperature data in **Appendix 1**. Generally, water temperatures continued to cool throughout the month.



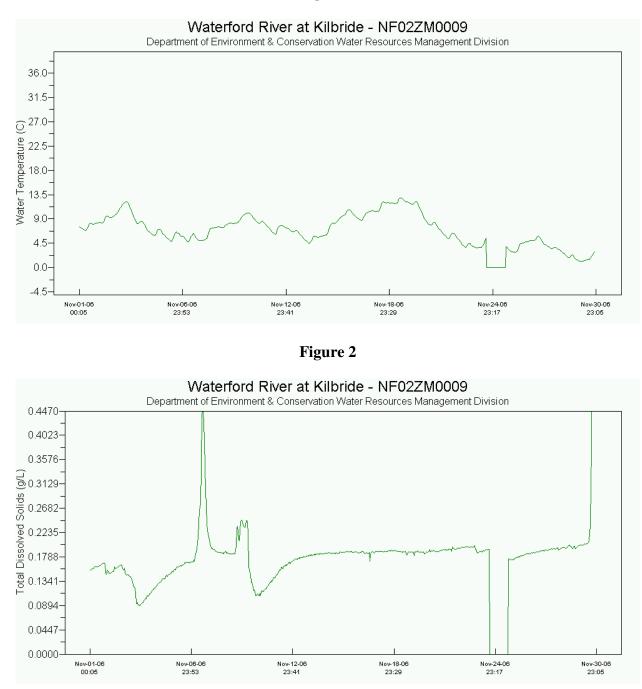


Total dissolved solids levels reflected the changes in conductivity as observed in Figure
Conductivity measurements are a good indication of total dissolved solids and total dissolved ion concentrations, although this is not an exact linear relationship.

Figure 3

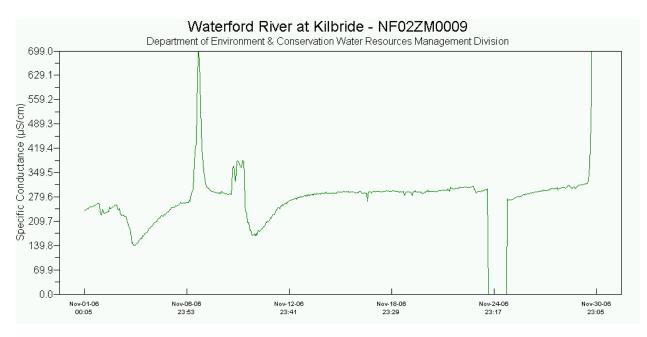


• Conductivity levels fluctuated throughout the month as observed in Figure 3.

Figure 4

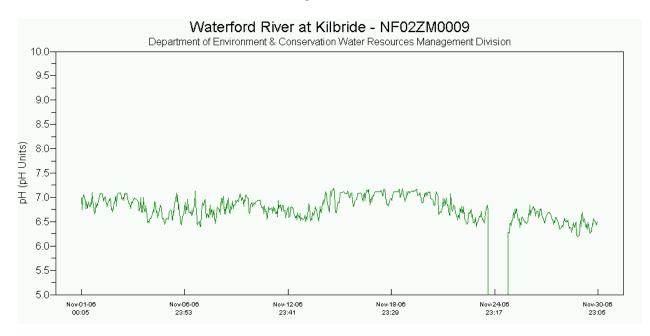

There were some instances where the pH measurements were outside the CCME recommended Canadian Water Quality Guidelines for the Protection of Aquatic Life of 6.5 to 9 (Figure 4).

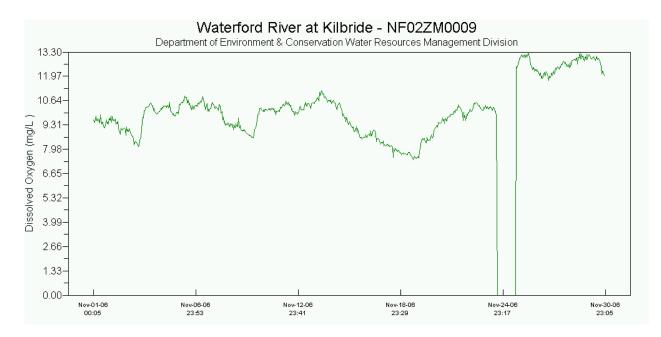

 Dissolved oxygen levels fluctuated during the month and were generally lower when water temperature increased. DO readings were higher after the instrument was calibrated and replaced.


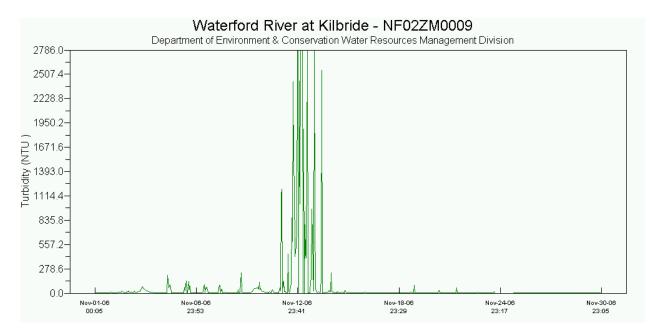


Figure 6

 Turbidity levels fluctuated and had several spikes noted throughout the month. The turbidity spikes (Figure 6) are normally in response to precipitation events. Several turbidity spikes exceeded the CCME recommended maximum of 8 NTU above background levels.

Figure 7

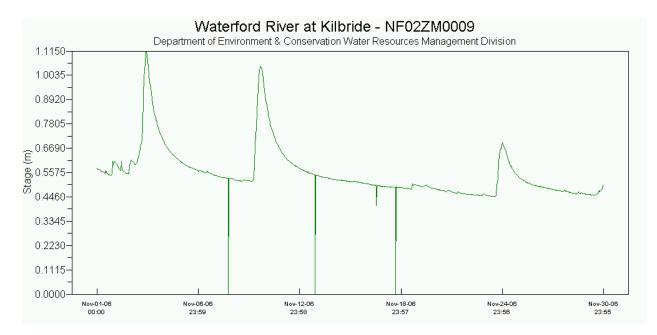

Report prepared by:

Kent Slaney Environmental Scientist Water Resources Management Division Department of Environment and Conservation Confederation Building West Block 4th Floor PO Box 8700 St. John's NL A1B 4J6

Ph. (709) 729-1157 Fax (709) 729-0320

Daily Data Report for November 2006											
D a y	<u>Max</u> <u>Temp</u> ℃	<u>Min</u> <u>Temp</u> ℃ ₩	<u>Mean</u> <u>Temp</u> ℃ ₩	Heat Deg Days C	Cool Deg Days C	<u>Total</u> <u>Rain</u> mm	<u>Total</u> <u>Snow</u> cm ₩	<u>Total</u> <u>Precip</u> mm	Snow on Grnd cm	Dir of Max Gust 10's Deg	Spd of Max Gust km/h
<u>01</u>	9.6	2.7	6.2	11.8	0.0	4.2	0.0	4.2	0		
<u>02</u>	14.3	6.8	10.6	7.4	0.0	4.8	0.0	4.8	0		
<u>03</u>	15.7	3.0	9.4	8.6	0.0	21.2	0.0	21.2	0		
<u>04</u>	5.7	-2.1	1.8	16.2	0.0	0.0	0.0	0.0	0		
<u>05</u>	6.5	-1.8	2.4	15.6	0.0	0.0	0.0	0.0	0		
<u>06</u>	5.2	-2.3	1.5	16.5	0.0	0.0	0.6	0.6	0		
<u>07</u>	3.8	-3.2	0.3	17.7	0.0	0.0	1.2	0.8	1		
<u>08</u>	10.1	0.9	5.5	12.5	0.0	Т	0.0	т	0		
<u>09</u>	8.8	4.0	6.4	11.6	0.0	1.8	0.0	1.8	0		
<u>10</u>	14.0	6.8	10.4	7.6	0.0	22.6	0.0	22.6	0		
<u>11</u>	9.7	2.1	5.9	12.1	0.0	0.0	0.0	0.0	0		
<u>12</u>	9.6	0.3	5.0	13.0	0.0	0.0	0.0	0.0	0		
<u>13</u>	3.0	-2.2	0.4	17.6	0.0	0.0	т	Т	Т		
<u>14</u>	5.2	-2.9	1.2	16.8	0.0	0.0	0.0	0.0	0		
<u>15</u>	13.4	4.5	9.0	9.0	0.0	1.8	0.0	1.8	0		
<u>16</u>	13.6	7.9	10.8	7.2	0.0	0.8	0.0	0.8	0		
<u>17</u>	16.8	7.2	12.0	6.0	0.0	0.0	0.0	0.0	0		
<u>18</u>	17.8	12.2	15.0	3.0	0.0	0.0	0.0	0.0	0		
<u>19</u>	19.2	11.4	15.3	2.7	0.0	2.2	0.0	2.2	0		
<u>20</u>	16.7	5.1	10.9	7.1	0.0	1.6	0.0	1.6	0		
<u>21</u>	7.7	1.1	4.4	13.6	0.0	1.2	0.0	1.2	0		
<u>22</u>	5.3	-0.6	2.4	15.6	0.0	0.0	0.0	0.0	0		
<u>23</u>	3.8	-2.5	0.7	17.3	0.0	0.0	0.0	0.0	0		
<u>24</u>	9.3	0.6	5.0	13.0	0.0	17.4	0.4	17.8	0		
<u>25</u>	1.1	-3.9	-1.4	19.4	0.0	0.0	т	Т	Т		
<u>26</u>	4.6	-1.8	1.4	16.6	0.0	0.0	0.0	0.0	0		
<u>27</u>	5.6	-0.6	2.5	15.5	0.0	0.0	0.0	0.0	0		
<u>28</u>	-0.3	-4.3	-2.3	20.3	0.0	0.0	Т	т	0		
<u>29</u>	-2.2	-5.6	-3.9	21.9	0.0	0.0	Т	Т	Т		
<u>30</u>	8.4	-5.5	1.5	16.5	0.0	1.2	2.4	3.6	Т		
Sum				389.7	0.0	80.8	4.6	85.0			

Appendix 1: Weather information for St. John's, NL provided by Environment Canada for November 2006